

A2 + A3

PCT

WORLD INTELLECTUAL PROPERTY ORGANIZATION  
International Bureau

## INTERNATIONAL APPLICATION PUBLISHED UNDER THE PATENT COOPERATION TREATY (PCT)


(51) International Patent Classification <sup>6</sup> : <b>G07F 7/08, G06F 17/60</b>	<b>A2</b>	(11) International Publication Number: <b>WO 96/33476</b> (43) International Publication Date: <b>24 October 1996 (24.10.96)</b>
(21) International Application Number: <b>PCT/US96/05521</b> (22) International Filing Date: <b>19 April 1996 (19.04.96)</b> (30) Priority Data: <b>08/427,287</b> <b>21 April 1995 (21.04.95)</b> <b>US</b> (71) Applicant: <b>CITIBANK, N.A. [US/US]; 399 Park Avenue, New York, NY 10043 (US).</b> (72) Inventor: <b>ROSEN, Sholom, S.; Apartment 7A, 10 West 86th Street, New York, NY 10024 (US).</b> (74) Agents: <b>DOWLING, Thomas, P. et al.; Morgan &amp; Finnegan, L.L.P., 345 Park Avenue, New York, NY 10154 (US).</b>	(81) Designated States: <b>AL, AM, AT, AU, AZ, BB, BG, BR, BY, CA, CH, CN, CZ, DE, DK, EE, ES, FI, GB, GE, HU, IS, JP, KE, KG, KP, KR, KZ, LK, LR, LS, LT, LU, LV, MD, MG, MK, MN, MW, MX, NO, NZ, PL, PT, RO, RU, SD, SE, SG, SI, SK, TJ, TM, TR, TT, UA, UG, UZ, VN, ARIPO patent (KE, LS, MW, SD, SZ, UG), Eurasian patent (AM, AZ, BY, KG, KZ, MD, RU, TJ, TM), European patent (AT, BE, CH, DE, DK, ES, FI, FR, GB, GR, IE, IT, LU, MC, NL, PT, SE), OAPI patent (BF, BJ, CF, CG, CI, CM, GA, GN, ML, MR, NE, SN, TD, TG).</b>  Published <i>Without international search report and to be republished upon receipt of that report.</i>	

AI

(54) Title: ELECTRONIC-MONETARY SYSTEM

## (57) Abstract

An electronic-monetary system having (1) banks or financial institutions that are coupled to a money generator device for generating and issuing to subscribing customers electronic money including electronic currency backed by demand deposits and electronic credit authorizations; (2) correspondent banks that accept and distribute the electronic money; (3) a plurality of transaction devices that are used by subscribers for storing electronic money, for performing money transactions with the on-line systems of the participating banks or for exchanging electronic money with other like transaction devices in off-line transactions; (4) teller devices, associated with the issuing and correspondent banks, for process handling and interfacing the transaction devices to the issuing and correspondent banks, and for interfacing between the issuing and correspondent banks themselves; (5) a clearing bank for balancing the electronic money accounts of the different issuing banks; (6) a data communications network for providing communications services to all components of the system; and (7) a security arrangement for maintaining the integrity of the system, and for detecting counterfeiting and tampering within the system. An embodiment of the invention includes a customer service module which handles lost money claims and links accounts to money modules for providing bank access.

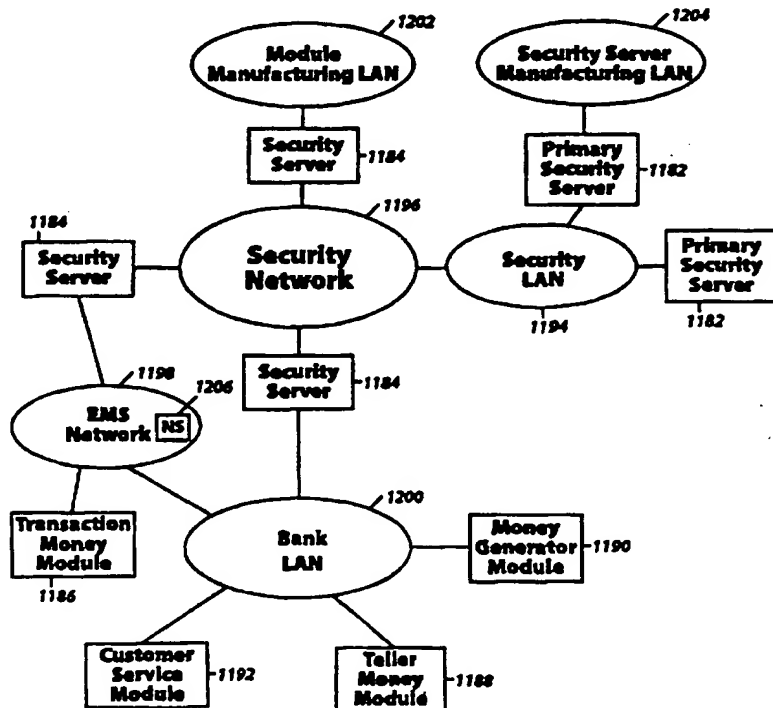

**FOR THE PURPOSES OF INFORMATION ONLY**

Codes used to identify States party to the PCT on the front pages of pamphlets publishing international applications under the PCT.

AM	Armenia	GB	United Kingdom	MW	Malawi
AT	Austria	GE	Georgia	MX	Mexico
AU	Australia	GN	Guinea	NE	Niger
BB	Barbados	GR	Greece	NL	Netherlands
BE	Belgium	HU	Hungary	NO	Norway
BF	Burkina Faso	IE	Ireland	NZ	New Zealand
BG	Bulgaria	IT	Italy	PL	Poland
BJ	Benin	JP	Japan	PT	Portugal
BR	Brazil	KE	Kenya	RO	Romania
BY	Belarus	KG	Kyrgyzstan	RU	Russian Federation
CA	Canada	KP	Democratic People's Republic of Korea	SD	Sudan
CF	Central African Republic	KR	Republic of Korea	SE	Sweden
CG	Congo	KZ	Kazakhstan	SG	Singapore
CH	Switzerland	LI	Liechtenstein	SI	Slovenia
CI	Côte d'Ivoire	LK	Sri Lanka	SK	Slovakia
CM	Cameroon	LR	Liberia	SN	Senegal
CN	China	LT	Lithuania	SZ	Swaziland
CS	Czechoslovakia	LU	Luxembourg	TD	Chad
CZ	Czech Republic	LV	Latvia	TG	Togo
DE	Germany	MC	Monaco	TJ	Tajikistan
DK	Denmark	MD	Republic of Moldova	TT	Trinidad and Tobago
EE	Estonia	MG	Madagascar	UA	Ukraine
ES	Spain	ML	Mali	UG	Uganda
FI	Finland	MN	Mongolia	US	United States of America
FR	France	MR	Mauritania	UZ	Uzbekistan
GA	Gabon			VN	Viet Nam

**ELECTRONIC-MONETARY SYSTEM**

This application is a continuation-in-part of co-pending U.S. application Serial No. 08/234,461, filed April 28, 1994.

**FIELD OF THE INVENTION**

The present invention relates to an electronic monetary system for implementing electronic money transactions as an alternative medium of economic exchange to cash, checks, credit and debit cards, and electronic funds transfer.

**BACKGROUND OF THE INVENTION**

Today, approximately 350 billion coin and currency transactions occur between individuals and institutions every year. The extensive use of coin and currency transactions has limited the automation of individual transactions such as purchases, fares, and bank account deposits and withdrawals. Individual cash transactions are burdened by the need of having the correct amount or providing change therefor. Furthermore, the handling, and managing (including guarding) of paper cash and coins is inconvenient, costly and time consuming for both individuals and financial institution alike. It is estimated that in the United States alone, \$60 billion dollars a year is spent by money handlers simply to move money. In addition, the security of paper money is seriously threatened by the relative ease of counterfeiting using, for example, widely accessible, high quality color copiers.

Although checks may be written for any specific amount up to the amount available in the account, checks have very limited transferability and must be supplied from a physical inventory. Paper-based checking systems do not offer sufficient relief from the limitations of cash transactions, sharing many of the inconvenience of handling currency while adding the inherent delays associated with processing checks. To this end, economic

- 2 -

exchange has striven for greater convenience at a lower cost, while also seeking improved security.

Automation has achieved some of these qualities for large transactions through computerized electronic funds transfer ("EFT") systems. Electronic funds transfer is essentially a process of value exchange achieved through the banking system's centralized computer transactions. EFT services are a transfer of payments utilizing electronic "checks," which are used primarily by large commercial organizations.

The Automated Clearing House (ACH) and point of sale (POS) systems are examples of electronic funds transfer systems that have become used by retail and commercial organizations on a substantial basis in recent years. However, the payments made through these types of EFT systems are limited in that they cannot be performed without the banking system. Moreover, ACH transactions usually cannot be performed during off business hours.

Home Banking bill payment services are examples of an electronic funds transfer system used by individuals to make payments. Currently, home banking initiatives have found few customers. Of the banks that have offered services for payments, account transfers and information over the telephone lines using personal computers, less than one percent of the bank's customers are using the service. One reason that Home Banking has not been a successful product is because the customer cannot deposit and withdraw money as needed in this type of system.

Current EFT systems, credit cards, or debit cards, which are used with an on-line system to transfer money between accounts, such as between the account of a merchant and that of a customer, cannot satisfy the need for an automated transaction system that provides for the transfer of universally accepted economic value outside of the banking system. Moreover, credit and debit card systems are generally insecure against fraud and do not



- 3 -

provide for adequate privacy.

To implement an automated, yet more convenient transaction system that does not require the banking system to intermediate the transfer, and that can dispense some form of economic value, there has been a trend  
5 towards off-line electronic funds transfer. For example, numerous ideas have been proposed for some form of "electronic money" that can be used in cashless payment transaction as alternatives to the traditional currency and check types of payment systems. See U.S. Patent No.  
10 4,977,595, entitled "METHOD AND APPARATUS FOR IMPLEMENTING ELECTRONIC CASH," and U.S. Patent No. 4,305,059, entitled "MODULAR FUNDS TRANSFER SYSTEM."

The more well known techniques include magnetic stripe cards purchased for a given amount and from which a  
15 prepaid value can be deducted for specific purposes. Upon exhaustion of the economic value, the cards are thrown away. Other examples include memory cards or so called smart cards which are capable of repetitively storing information representing value that is likewise deducted  
20 for specific purposes.

However, these proposed systems suffer from a failure to recognize fully the significance of bank deposits as money, and their necessity to back any form of  
25 universally accepted monetary representations that may be issued. In these systems representations of economic value, whether electronic or paper, are issued without the backing of equal valued liabilities as the counterpart to their assets.

None of these proposed paperless payment systems  
30 are comprehensive enough so as to implement a multipurpose electronic monetary system that includes not only the automated devices that allow subscribers to transfer electronic funds or money between them without any  
intermediating system, but that also encompasses and  
35 includes an entire banking system for generating the value

- 4 -

represented by the electronic money and for clearing and settling the electronic money accounts of the banks and financial institutions involved to maintain a monetary balance within the system.

Thus, there is a need for a system that allows common payor to payee economic exchanges without the intermediation of the banking system, and that gives control of the payment process to the individual. Furthermore, a need exists for providing a system of economic exchange that can be used by large organizations for commercial payments of any size, that does not have the limitations of the current EFT systems.

In commonly assigned, U.S. Patent Application Serial No. 07/794,112, filed November 15, 1991, which is herein incorporated by reference, an electronic monetary system (EMS) is described which overcomes the above described, and other prior art limitations and provides a complete electronic money system which utilizes electronic money that is interchangeable with traditional cash and is universally accepted. The invented EMS provides a method and system for of securely and reliably transferring economic value including currency and credit among subscribers, among financial institutions, and between subscribers and financial institutions. The EMS also provides for electronic money in the form of multiple currencies. Nevertheless, the paramount importance of security and reliability creates a need for further enhancements to the EMS.

Accordingly, it is an object of the present invention to provide an enhanced EMS system and related methods for economic exchange that is secure from reuse, duplication and counterfeiting.

It is another object of the present invention to provide a system and process to claim lost money.

It is yet another object of the present invention to provide a user friendly electronic payment

- 5 -

system and method that may be used reliably and securely for real time transfers of money from a buyer to a merchant for goods.

The foregoing objects and advantages of the invention are illustrative of those which can be achieved by the present invention and are not intended to be exhaustive or limiting of the possible advantages which can be realized. Thus, these and other objects and advantages of the invention will be apparent from the description herein or can be learned from practicing the invention, both as embodied herein or as modified in view of any variations which may be apparent to those skilled in the art. Accordingly, the present invention resides in the novel methods, arrangements, combinations and improvements herein shown and described.

#### SUMMARY OF THE INVENTION

To achieve the foregoing, and other objects, the method and apparatus of the present invention employ a preferred embodiment in the form of an electronic-monetary system having (1) banks or financial institutions that are coupled to a money generator device for generating and issuing to subscribing customers electronic money including electronic currency backed by demand deposits and electronic credit authorizations; (2) correspondent banks that accept and distribute the electronic money; (3) a plurality of transaction devices that are used by subscribers for storing electronic money, for performing money transactions with the on-line systems of the participating banks or for exchanging electronic money with other like transaction devices in off-line transactions; (4) teller devices, associated with the issuing and correspondent banks, for process handling and interfacing the transaction devices to the issuing and correspondent banks, and for interfacing between the issuing and correspondent banks themselves; (5) a clearing bank for balancing the electronic money accounts of the

- 6 -

different issuing banks; (6) a data communications network for providing communications services to all components of the system; and (7) a security arrangement for maintaining the integrity of the system, and for detecting counterfeiting and tampering within the system.

In the preferred embodiment, the functions of the money generating devices, the transaction devices, and the teller devices will be performed by a combination of tamper-proof computer hardware and application software modules that may be networked together. Information is transmitted in an encrypted form to provide security from unauthorized inspection. The electronic money is transmitted with digital signatures to provide authentication, and security from modification or counterfeiting.

The electronic money exchanged by these devices may be an electronic representation of currency or credit. An important aspect of the electronic currency is that it is the equivalent of bank notes and is interchangeable with conventional paper money through claims on deposits in an issuing bank, but can be withdrawn or deposited both at an issuing bank and at a correspondent bank. However, only the issuing banks can generate the electronic currency, and will be liable for its redemption.

The issuing banks later utilize inter-bank clearing and settling processes to maintain the monetary balance in the banking system, as is currently practiced by today's banking industry.

The electronic money representations are fungible, universally accepted, and undeniably redeemable from the issuing banks, i.e., they have the characteristics of money transactions. To preserve the integrity of the electronic monetary system, each exchange of electronic money includes, along with other information, data identifying the monetary unit of the credit or currency, (i.e., dollars, yen, etc.) the amount

- 7 -

by unit of credit or currency, the bank issuing the electronic credit or currency, and several digital signatures.

According to a broad aspect of the invention, an electronic monetary system provides for transactions utilizing electronic money including electronic currency backed by demand deposits in a bank in lieu of cash transactions, and electronic credit authorizations. In an embodiment of the present invention, the EMS comprises a money module for generating the electronic money; a money module for issuing, distributing, and accepting the electronic money; and a money module for accepting, storing, and transferring the electronic money between other accepting money modules and between the accepting money module and the issuing money module.

According to a further aspect of the invention, an electronic monetary system is provided for implementing and maintaining electronic money which includes electronic currency that is interchangeable with conventional money through claims on deposits in a bank and electronic credit authorizations.

In an embodiment of the present invention, the system includes a plurality of issuing banks; a generator module for creating electronic money; teller modules coupled to the generator modules, for performing teller transactions and for interacting with other teller modules, such transactions including the accepting and the distributing of the electronic money; a security system for providing the overall integrity of the electronic monetary system; a clearing and settling process for balancing the electronic money accounts of the separate issuing banks and for clearing the electronic money issued by the issuing banks; and a plurality of transaction modules owned by authorized users, for transferring the electronic money between the transaction modules and between the transaction modules and the teller modules;

- 8 -

and a customer service module handling lost money claims and for linking accounts to money modules to provide bank access.

In accordance with another aspect of the invention, the functions of the generator modules, the transaction modules, the teller modules, and the customer service modules will be performed by a combination of tamper-proof computer hardware and application software that may be networked together.

The electronic money exchanged by these modules, which may be an electronic representation of currency backed by demand deposit accounts at the issuing bank or credit authorizations, may be transmitted with digital signatures to provide security from unauthorized modification or counterfeiting. In a preferred embodiment, security from counterfeiting and tampering is also provided by requiring the modules and the individual units of electronic money to be renewed periodically. Preferably, transfer of a note between modules includes a sequence identification number to facilitate note transfer history reconciliation. Offending modules or counterfeit electronic money can be removed from circulation as soon as they are discovered.

Also, in accordance with a further aspect of the invention, a process to claim lost money is provided whereby a transaction module owner/holder may submit claims to the banking system via a customer service module, and subsequent to note transfer history reconciliation by the banking system, the owner/holder may recover any lost notes that were claimed.

A further aspect of the invention provides a process for a transaction module to update credit such that there is only one credit note for each credit account in a money module.

Also, in accordance with a preferred embodiment of the present invention, a process is provided for an

- 9 -

owner/holder of a transaction module to securely and reliably purchase goods from a merchant.

**BRIEF DESCRIPTION OF THE DRAWINGS**

Additional aspects, features, and advantages of the invention will be understood and will become more readily apparent when the invention is considered in the light of the following description made in conjunction with the accompanying drawings, wherein:

Figure 1A is a diagram showing the EMS Security Hierarchy.

Figure 1B is a diagram showing the security network messaging between a primary security server and an ordinary security server.

Figure 2 is a diagram showing the security network structure for the EMS.

Figure 3A illustrates the functional components of a security server.

Figure 3B illustrates the functional components of a network server.

Figure 4A illustrates the functional components of a customer service module.

Figure 4B illustrates the functional components of a primary security server.

Figure 5 shows an overview of the network sign-on procedure.

Figures 6A-6K illustrate a Network Sign-On protocol.

Figures 7A-7E illustrate an Establish Session protocol in the EMS.

Figures 8A-8B illustrate a Transfer Notes protocol.

Figures 9A-9D illustrate a Foreign Exchange protocol.

Figure 10 illustrates a Commit protocol for modules in the EMS.

Figures 11A-11B illustrate an Abort Transaction

- 10 -

protocol for modules in the EMS.

Figures 12A-12C illustrate a Point of Sale (POS) Payment protocol.

Figures 13A-13B illustrate an Update Credit form Issuing Bank protocol

5 Figure 14 illustrate a setup Credit protocol.

Figures 15A-15B illustrates a Request Credit protocol.

Figure 16 shows an example of a Note Transfer History.

10 Figure 17 illustrates a Note Transfer Tree.

Figures 18A-18C illustrates a Link Money Module to Bank Account(s) for Bank Access protocol.

Figures 19A-19C illustrate a Revalidate Money Module Link to Bank Account(s) protocol.

15 Figure 20 illustrates a Valid Account Number protocol.

Figures 21A-21B illustrate a Create Lost Notes claim protocol.

20 Figures 22A-22E illustrate a Claim Lost Notes protocol.

#### DETAILED DESCRIPTION OF THE INVENTION

The present invention provides an improved monetary system using electronic media to securely and reliably exchange economic value. The system can be  
25 implemented by integrating novel data processing systems with other procedures which can be implemented with the current worldwide banking systems. In accordance with the present invention, several types of enhancements are presented to the Electronic Monetary System, disclosed in  
30 commonly assigned, U.S. Patent Application Serial No. 07/794,112, filed November 15, 1991, which is herein incorporated by reference. These enhancements include: a set of security improvements including improved foreign exchange (F/X) and Transfer Notes transaction processes, a  
35 process to claim lost money, a process for linking money



- 11 -

modules for bank access, a process for a point of sale payment, and a process for updating credit.

#### SECURITY

Effective security for a monetary system has three characteristics: inhibit counterfeiters, detect counterfeiters, and contain counterfeiters. The described EMS is designed to have components which exhibit all three characteristics.

In order to inhibit counterfeiters, the money modules communicate using symmetric and asymmetric key cryptography. None of the messages are in the clear. The module's protocols are also physically protected by tamper-proof hardware.

Counterfeiting is detected by note reconciliation processes. System-wide time protocols (e.g., note expiration) force electronic notes to be reconciled regularly. Electronic notes are also refreshed (i.e., replaced with a new note with a new expiration date) when banking transactions are performed.

Money modules are blocked (e.g., placed on the bad ID list) if duplicated or counterfeit notes are tied back to them. Also, notes which have passed through these modules will not be allowed to transfer. The transfer of duplicated or counterfeit notes will be contained since notes expire or eventually are deposited to a bank.

Moreover, in case of a serious system security problem, the EMS may call for a global recertification, thereby requiring all modules to recertify, including transaction money modules the next time they sign on the EMS Network.

The following list of improvements are intended to shield all information from eavesdroppers listening to module interactions. All information is cloaked--even the public keys and module identifiers. The list of improved security features include the following.

- 1) Securing the network sign-on so that no one can spoof the money module or intercept any

- 12 -

of its information in the clear, as described below with reference to Figure 5.

- 2) Creating a method for assigning security server, money generator and teller identifiers (see Module Numbering Scheme). These identifiers are checked in:
  - a) Establishing a session (see Figure 7);
  - b) Transferring notes--check transfer records (see Figure 8).
- 3) Implementing a two-tier security server structure (see Security Hierarchy and Security Network), including a primary security server, wherein all modules carry the public keys of the primary security server, and a security server which certifies all other modules.
- 4) Improving Transfer Notes to check bad ID list against all transfers before accepting notes in payment or Foreign Exchange (F/X), and to check for duplicated notes (see Figure 8).
- 5) Encrypting all certificates using private keys of a security server (see Certificate Structure and Validation).
- 6) Varying the size of the public keys dynamically (see Security Network and Figure 6).
- 7) Changing the commit protocol so that failure does not duplicate money (see Figure 10).
- 8) Changing F/X so that neither party can interrupt the commit, in order to cheat with certainty, by receiving money and not sending any money (see Figure 9).
- 9) Changing Abort to log information on a failed commit if payer commits but receiver

- 13 -

aborts (see Figure 11).

- 10) Allowing global recertification if needed  
(see Security Network and Figure 6).

The foregoing list of security improvements highlights some of the security features provided by the enhanced security system of the present invention. These, and other, improvements may be further understood from the ensuing detailed description of an alternative preferred embodiment of a security system for an EMS.

#### Security Hierarchy

In accordance with the present invention, another embodiment for EMS system security may be provided as follows. Referring to Figure 1A, EMS will have two types of security servers, primary 1182 and ordinary 1184. The primary security servers 1182 certify the (ordinary) security servers 1184. The security servers 1184 certify all other modules (transaction MMs 1186, Teller MMs 1188, money generator modules 1190, and customer service modules 1192) in the system.

The primary servers 1182 only interact with other primary servers 1182 or the security servers 1184. Referring to Figure 2, the primary security servers 1182 are housed in a secure facility connected to each other by a Security LAN 1194. The LAN 1194 is connected through a secure gateway to the Security Network 1196. Only the security servers communicate over this network. All security servers are physically protected devices.

Security servers 1184 are also attached to the EMS Network 1198 and bank local networks 1200. Security servers are treated as if they could be compromised and are validated upon all interactions with other modules.

Only the security servers 1184 and modules have certificates. The primary security server's public keys are carried by these devices. There are two types of certificate: security server and module.

- 14 -

Certificate Structure And Validation

The structure of a certificate is as follows:

$\text{Cert}(\text{SS}) = \text{E}_{\text{PSS}}[\text{SS}(\text{id}) \parallel \text{SS}(\text{PK}) \parallel \text{expire date} \parallel \sigma_{\text{PSS}}(\text{X})] \parallel [\text{PSS}(\text{id}) \text{ XOR } \text{C}]$

\_\_\_\_\_ X \_\_\_\_\_

5  $\text{Cert}(\text{M}) = \text{E}_{\text{SS}}[\text{M}(\text{id}) \parallel \text{M}(\text{PK}) \parallel \text{expire date} \parallel \sigma_{\text{SS}}(\text{Y})] \parallel \text{Cert}(\text{SS})$

\_\_\_\_\_ Y \_\_\_\_\_

The certificate validation protocols are:

- 1) Validate Cert(SS)
  - 10 a)  $\text{PSS}(\text{id}) = [\text{PSS}(\text{id}) \text{ XOR } \text{C}] \text{ XOR } \text{C}$
  - b)  $\text{D}_{\text{PSS}}(\text{E}_{\text{PSS}}(\text{X} \parallel \sigma_{\text{PSS}}(\text{X}))) = \text{X} \parallel \sigma_{\text{PSS}}(\text{X})$
  - c) Check if SS(id) is authentic (see module numbering scheme)
  - 15 d) Check if date is valid
  - e) Check if  $\text{D}_{\text{PSS}}(\sigma_{\text{PSS}}(\text{X})) = \text{h}(\text{X})$
- 2) Validate Cert(M)
  - a) Validate Cert(SS)
  - 20 b)  $\text{D}_{\text{SS}}(\text{E}_{\text{SS}}(\text{Y} \parallel \sigma_{\text{SS}}(\text{Y}))) = \text{Y} \parallel \sigma_{\text{SS}}(\text{Y})$
  - c) Check if M(id) is authentic (see module numbering scheme)
  - d) Check if date is valid
  - 25 e) Check if  $\text{D}_{\text{SS}}(\sigma_{\text{SS}}(\text{Y})) = \text{h}(\text{Y})$

Where PSS=Primary Security Server  
 SS=Security Server  
 M=Module

30  $\parallel$  =Concatenate  
 id=identification number  
 h=Hash function  
 C=Constant random number

PK=Public Key  
 (includes  
 length of key)  
 $\sigma$ =Digital  
 Signature= $\text{E} \cdot \text{h}$   
 Cert=Certificate  
 E=Algorithm with  
 private  
 key used for  
 encrypting  
 and for creating  
 digital

35

- 15 -

shared by all modules

signature  
 D=Algorithm with public  
 key used for decryption  
 and for checking  
 digital signature

Note E and D may also be used  
 for decrypting and encrypting,  
 respectively, when applied in  
 other applications.

### Module Numbering Scheme

The primary security servers 1182, security  
 servers 1184, teller money modules 1188, money generator  
 modules 1190, customer service modules 1192, and  
 transaction money modules 1186 are assigned identification  
 numbers (id's) so that the numbers can be checked for  
 authenticity. A 48-bit prime number "p" is generated and  
 a primitive root "a" modulo p (where  $a^{p-1} \not\equiv 1(p)$  for all  
 $1 \leq n < p-1$ ) is found via a secure process. Both a and p are  
 loaded to all modules in the system securely by the  
 primary security servers when they are manufactured.

The scheme works as follows:

If  $a^n = m(p)$  and

- (1)  $1 \leq m \leq 99,999$  then n is assigned as the id of a primary security server,
- (2)  $100,000 \leq m \leq 999,999$  then n is assigned as the id of a security server,
- (3)  $1,000,000 \leq m \leq 6,999,999$  then n is assigned as the id of a teller money module,
- (4)  $7,000,000 \leq m \leq 9,999,999$  then n is assigned as the id of a money generator module,
- (5)  $10,000,000 \leq m \leq 11,999,999$  then n is assigned as the id of a customer service module,
- (6)  $m \geq 12,000,000$  then n is assigned as the id of a transaction money module.

If a module or server is validating a  
 certificate, it checks the authenticity of the  
 identification number (e.g.,  $M(id)$ ,  $SS(id)$ , or  $PSS(id)$ ) n

- 16 -

by computing  $a^m \pmod{p}$  and then checks if  $m$  is in the correct range.

#### Security Network

As shown in Figure 2, the Security Network 1196 and the Security LAN 1194 connect the security servers 1184 to the primary security servers 1182. Security servers 1184 initially certify the money modules and customer service modules 1192 at manufacturing. Such security servers may be connected by a Module Manufacturing LAN 1202. They pass security information such as the bad id list and the list of primary security servers and their public keys to the modules. The bad id list contains the identities of the money modules, customer service modules, and security servers which are blocked from transacting. Recertification of these modules is described subsequently in the network sign-on flow diagram.

The security servers 1184 are initially certified by the primary security servers 1182 at manufacturing. Such primary security servers may be connected by a Security Server Manufacturing LAN 1204. Referring to Figure 1B, the security servers 1184 receive various security information which they pass to the other modules. The security servers provide security services for the EMS Network 1198 and the bank LANs 1200, such as network sign-on where they pass updated security information. The security servers 1184 receive this information from the primary security servers 1182 over the Security Network 1196. Transaction money modules 1186 communicate with the EMS Network 1198 via network servers 1206 (NS). Participating banks have teller money module(s) 1188 and perhaps money generator(s) 1190 connected to their LANs 1200.

The Security Network 1196 is link encrypted. In addition, the primary security servers and security servers share a common symmetric key (a Security Network

- 17 -

encryption key). This key is changed periodically by a designated primary server 1182 by public key, key exchange.

The list of bad id's is maintained by a designated primary server 1182. The list is accumulated from interactions with participating banks, law enforcement authorities, and subscribers to the system.

Periodically the length of the public keys for the security servers and the modules will be changed. The key length will be normally lengthened to maintain a high security level. The new designated key lengths will be communicated to the primary security servers by a designated primary server. The new lengths will be communicated to the security servers by the primary servers when new bad id lists are sent or upon recertification. In case of a dangerous breach of security, a primary security server can call for global recertification.

The length of the public key for each primary server will not change. A timetable will be created which will schedule the implementation and decommission of primary security servers. The new servers will most likely have longer keys unless they are implemented because of increased transaction volume. The list of active PSS public keys is created by a primary security server and signed by the server with its private key. The list is then broadcast to other security servers.

Figure 3A shows the functional components of a security server 1184. An External Interface function 1208 provides a communications layer for network interfacing. A Session Manager function 1210 controls the security aspects of a transaction session. A Network Sign-On function 1212 manages the security functions for network sign-on. A Create Certificate function 1214 certifies a certificate for any of the money modules (in a primary security server, this function certifies security

- 18 -

° servers). A Distribute Certificatory Keys function 1218 distributes the Certification Agency's list of valid primary security server public keys to the money modules (primary security server also distributes global recertification message). A Control Bad ID List function  
5 1220 controls and distributes the list of bad identifiers. A Synchronize Date/Time function 1222 keeps money module Clock/Timer services synchronized to a system time. Clock/Timer 1224 and Cryptography functions 1226 are identical to those functions in the money modules.

10 Figure 3B shows the functional components of a network server 1206. An External Interface function 1228 provides a communications layer for network interfacing. A Communication Session manager function 1230 manages a communication session between money modules, and between a  
15 money module and a security server. A Network Sign-On function 1232 controls the money module network sign-on process. A Route Message function 1234 provides directory services for routing messages, controlling message routing during sign-on and during a money module session. A  
20 Direct to Bank Services function 1236 provides information on services provided by participating banks. A Cryptography function 1238 provides a Symmetric Key function 1240 and a Random Number Generator function 1242. The Symmetric Key function 1240 encrypts messages between  
25 the network server 1206 and the modules accessing the network and between the network server 1206 and the security servers 1184. The Random Number Generator function 1242 generates random numbers for encryption keys and verification messages.

30 In accordance with the present invention, another secure processing component, a customer service module (CSM) 1192, is preferably employed. A CSM is a tamper-proof device used for creating and updating account profiles. CSMs contain a unique certificate like those  
35 found in money modules and security servers. CSMs can



- 19 -

- o establish secure sessions with other modules (e.g., security servers). The CSM requires a host to interface to a customer service representative and the on-line banking systems.

The CSM has two primary functions. First, the CSM creates account profiles so that a money module can access bank accounts, revalidate the money module link to bank accounts, and validate account numbers. These transactions are more fully described hereinbelow with reference to figures 18-20. Second, the CSM functions to claim lost notes in response to a request from a host customer services representative, which is described in further detail in figure 21 and figure 22. A CSM has the same security functions as a money module and a special range of numbers for its identifier (see "Module Numbering Scheme"). The performance of these functions by the CSM simplifies the validate account number process for the Teller Module.

20 In accordance with an embodiment of an EMS which employs a CSM, the account profile structure for each bank changes to:

$$\frac{\text{Expire date}}{X} \parallel M(\text{id}) \parallel B(\text{id}) \parallel LA \parallel \sigma_{\text{sm}}(X) \parallel \text{Cert}(\text{CSM})$$

25       Where       M(id) = module identifier  
                  B(id) = bank identifier  
                  LA = list of account numbers and type of account  
                      (deposit or loan)  
                   $\sigma_{\text{cm}}$  = signature of CSM  
                  Cert(CSM) = certificate of (CSM)  
                  || = concatenate

30 A validation procedure for such a profile is described hereinbelow with reference to figure 20.

Figure 4A shows the functional components of a Customer Service Module (CSM) 1192. The External Interface 3000 interfaces the CSM to other processing and communications means within the Customer Service Module

- 20 -

Host (CSMH) processor; the Session Manager 3001 acts to control and commit (i.e., finalize) or abort a transaction session between the CSM and a transaction money module or customer service representative. A Create Account Profile function 3002 constructs from customer account information an account profile that allows a money module to access the subscriber's different bank accounts. A Public Key function certifies and signs a bank account profile. Since the CSM requires a host to interface to a customer service representative and the on-line banking systems, a To Host function 3006 mediates the separation of duties between the CSM applications and the host applications. A Claim Lost Notes function 3008 is responsive to subscriber lost note claims, which the CSM validates and distributes to the issuing banks. The Maintain Security function 3004 manages the list of compromised money modules, applies for certificates, synchronizes the clocks, and manages the creation of new digital keys. Clock/Timer 3012 and Cryptography functions 3010 are identical to those functions in the money modules.

Figure 4B shows the functional components of a primary security server 1182. An External Interface function 3020 provides a communications layer for network interfacing. A Session Manager function 3002 controls the security aspects of a session with security servers, which are treated as if they may be compromised, and with other primary security servers. A Create Certificate function 3024 creates a certificate for any of the security servers. A Distribute Certificatory Keys function 3026 distributes the Certification Agency's list of valid primary security server public keys to the security servers. A Distribute Security Network Keys function 3032 manages and distributes security network keys among primary security servers, and to security servers. A Set Global Recertification function 3030 determines whether global recertification is required (e.g., because of a

- 21 -

dangerous breach of security) and calls for global recertification when deemed necessary. A Distribute Bad ID List function 3028 controls and distributes the list of bad identifiers. Clock/Timer 3034 and Cryptography functions 3036 are identical to those functions in the money modules.

#### Network Sign-On

An overview of the network sign-on procedure is provided with reference to Figure 5. The Sign-On protocol describes the situation where a module 1243 desires access to the EMS Network 1198 for recertification, deposit, withdrawal or other reason. The module 1243 may be a transaction money module 1186, teller money module 1138, money generator module 1188, or customer service module 1192. (a) Establish a communication between module 1243 and network server 1206. (b) Pass the module's certificate to the network server 1206. (c) The network server 1206 generates a random verification number V and a random key K; the network server then passes the module's certificate, V, and K to a security server 1184 (encrypted by a NS/SS key). (d) The module 1243 and the security server 1184 establish a secure communication session (via session key (MM/SS)). (e) The security server 1184 passes the time/date, update bad ID list, update list of primary security server public keys, public key length, global recertification (if necessary), and recertified module certificate (if necessary). (f) End session with module 1243 and send V and K to the module 1243. (g) Encrypt V with K and send to the network server 1206. (h) The network server 1206 acknowledges network sign-on to the module 1243. (i) The module 1243 then informs the network server 1206 of the destination (if any) to which it wishes to be connected. (j) The network server 1206 establishes a connection to the destination.

The network sign-on is designed so that no one can spoof the module 1243 or intercept any of its

- 22 -

information in the clear. Figure 6 describes the detailed flow of the network sign-on procedure.

Communications A establishes communications with the EMS Network 1198 (step 1244). Maintain Security A sends its certificate to the network server 1206 (step 1246). NS Network Sign-On receives the certificate (step 1248). NS Random Number Generator generates random key K and random verification number V (step 1250). NS Symmetric Key encrypts the module's certificate, K and V with a NS/SS key (step 1252). NS/SS keys are local symmetric keys installed in network servers 1206 and security servers 1184 which communicate for network sign-on. NS Network Sign-On sends the certificate, K and V to the security server 1184, where SS Network Sign-On receives the message and SS Symmetric Key decrypts the message (steps 1254 - 1258). SS Network Sign-On stores K and V and then sends the module certificate to SS Public Key for validation (steps 1260 - 1264). In order to allow for the possibility of recertification, SS Public Key does not consider the expiration date in determining the validity of the module certificate.

If the module certificate is not valid, then SS Network Sign-On creates messages to deny access for transmittal to the network server 1206 and module 1243 (step 1266). SS Public Key encrypts the message to the module 1243 with the module's public key and SS Session Manager sends the messages to the network server (step 1268 - 1270). NS Network Sign-On receives the messages and notes access denied. The encrypted message is then sent to the module, and the network server disconnects. (Step 1272). Session Manager A receives the message, Public Key A decrypts the message, and Session Manager A notes that sign-on was denied (steps 1274 - 1278). If the device requesting sign-on was a transaction money module, then To Subscriber A informs the subscriber (steps 1280 - 1282). Otherwise, To Bank A informs the bank (step 1284).

- 23 -

0           If, on the other hand, the module's certificate  
is valid, then SS Control Bad ID List checks if the  
module's id is on the bad id list (steps 1286 - 1288). If  
the id is on the list, then network access is denied.  
5       Otherwise, SS Random Number Generator creates random  
number R and a verification message (step 1290). SS  
Network Sign-On assembles R and the verification message  
in a message which is encrypted by SS Public Key using A's  
public key. Public Key A also augments this encrypted  
10       message by appending the security server's certificate.  
(steps 1292 - 1294). The message is sent to A where  
Public Key A decrypts the message and validates the  
security server's certificate (step 1298).

15           If the certificate is invalid, then A notes  
session termination and informs either the subscriber or  
the bank (steps 1304 - 1306). If the certificate is  
valid, then Maintain Security A checks if the security  
server's id is on the bad id list (steps 1308 - 1310). If  
on the list, then the session is terminated (steps 1300 -  
20       1306). If not on the list, then Random Number Generator A  
creates random number R(A) (step 1312). Maintain Security  
A forms session key (MM/SS) by the operation R(A) XOR R  
and then stores the session key (step 1314).

25           A message containing the verification message  
and R(A) is assembled and encrypted with the security  
server's public key (step 1316). Session Manager A sends  
the message To SS Network Sign-On and SS Public Key  
decrypts the message (steps 1318 - 1322).

30           SS Network Sign-On verifies that the  
verification message is the one which it created (steps  
1324 - 1326). If it is not, then the security server  
denies network access. If the verification message is  
correct, then SS Symmetric Key forms session key (MM/SS)  
by R(A) XOR R (step 1328). SS Session Manager notes the  
start of session and sends an acknowledgement to A by the  
35       Send Message subroutine (steps 1330 - 1332). Session

- 24 -

Manager A receives the acknowledgement and notes the start of the session (step 1334).

Clock/Timer A sends the time and date to the Session Manager which sends it to the security server (steps 1336 - 1340). SS Synchronize Date/Time receives the time and date and checks if it is within parameter (steps 1342 - 1344). If not within parameter, then SS Synchronize Date/Time sends a new time and date to Session Manager A (steps 1346 - 1350). Clock/Timer A then adjusts the time and date (step 1352). A then resends its date and time to the security server for rechecking. If clock synchronization is attempted more than a set number of times, then a clock malfunction is reported to the subscriber or bank, which may then retry if desired (steps 1354 - 1362).

If, however, the time and date are within parameter, then SS Network Sign-On assembles a message containing the bad id list, the new list of primary security server public keys (which comes from the Distribute Certificatory Key function), and the public key length (the size of the public keys are varied periodically) (step 1364). SS Create Certificate checks if a global recertification has been called for, and ensures that the time period for the global recertification has not expired (steps 1366 - 1368). Such time period should be long enough so that everyone's certificate has been recertified or expired. The function should also check when the module last recertified because if it was certified during the period of the global recertification, then there would be no need to recertify.

If recertification is required, then SS Create Certificate adds to the previous message: module should recertify (step 1370). Then, whether or not a recertification is called for, SS Public Key signs the message (step 1372). The message is sent to A where Public Key A checks the digital signature on the message

- 25 -

(steps 1374 - 1378). If the signature is invalid, then the session is terminated. Maintain Security A then updates its bad id list, public key list, and key length (step 1382).

Module A then checks if its certificate needs to be recertified (either because of a global recertification order or because of an expired certificate) (steps 1384 - 1386). If a new certificate is required, then Maintain Security A initiates the generation of a new certificate (step 1388). Public Key A generates new keys and signs the new public key with its old private key (step 1390). Session Manager A sends the signed new public key to the security server's SS Create Certificate (steps 1392 - 1396). SS Public Key then validates the signature on the new public key (steps 1398 - 1400). If not a valid signature, then the security server denies network access. If the signature is valid, then SS Public Key signs the module's new certificate and sends it to the module (step 1402). Session Manager A receives the certificate, Maintain Security A undertakes to validate the certificate, and Public Key A validates the signature (steps 1404 - 1410).

If the certificate is not valid, then Session Manager A sends a "Certificate Invalid" message and the certificate to the security server by the Send Message function (steps 1412 - 1413). SS Network Sign-On receives the message and SS Public Key validates the signature (steps 1414 - 1418). If the security server determines that the certificate is actually valid, then it denies the module access to the network. If, however, the certificate is invalid, then SS Session Manager informs the network server that it will disconnect from the network (step 1420). NS Network Sign-On informs the module of the malfunction (step 1422). The module then queries the subscriber or the bank for a retry (steps 1424 - 1432).

- 26 -

If, on the other hand, the module determines that its new certificate is valid, then Session Manager A sends an acknowledgement to the security server (step 1434). Similarly, if no new certificate was required then Maintain Security A sends an acknowledgement message to the security server (steps 1436 - 1438). In either case, SS Session Manager receives the acknowledgement and notes the end of its session with the module (step 1440). SS Network Sign-On then sends K and V to A (steps 1442 - 1444). Session Manager A receives the message and Symmetric Key A encrypts V and the destination with K and sends the message to the network server (steps 1446 - 1448). NS Network Sign-On receives the message and NS Symmetric Key decrypts the message and checks if V is the same V it previously generated (steps 1450 - 1454).

If V is incorrect, then NS Network Sign-On sends an access denied message to A and then disconnects (steps 1456 - 1458). If V is correct, then NS Network Sign-On establishes a link to the destination and sends an acknowledgement to A (step 1460). Finally, Session Manager A receives the acknowledgment and notes that A has signed-on to the EMS Network 1198 (step 1462).

#### Establish Session

Figure 7 shows the Establish Session protocol. Maintain Security A sends the module certificate to the session manager, and Session Manager A receives the certificate and checks if money module A is connected to the network (steps 1464 - 1466). If money module A is not connected to the network, then Session Manager A sends the certificate received from Maintain Security A to destination B (step 1476).

Alternatively, if money module A is connected to the network, then Symmetric Key A encrypts the certificate with K and Session Manager A sends the encrypted certificate to the network server (step 1468 - 1472). The Network Server decrypts the certificate with K and sends



- 27 -

the certificate to destination B.

Regardless of whether the certificate was sent by the Network Server or by Session Manager A, Session Manager B receives the certificate and Maintain Security B (if B is a security server, then this function is performed by the Session Manager) validates the certificate (steps 1480 - 1482). If the certificate is not valid, then Session Manager B notes the session is terminated and informs either the subscriber or the bank (steps 1486 - 1492) (if B is a security server, then B merely notes the transaction is terminated).

If the certificate is valid, then Maintain Security B checks if A is on the bad id list (steps 1494 - 1496). If A is on the list, then the session is terminated. If A is not on the list, then Random Number Generator B creates random number R(B) and a B verification message (step 1498). Clock/Timer B retrieves the time and date (step 1500). Maintain Security B assembles R(B), B verification message and time and date in a message (step 1502). Public Key B encrypts the message with A's public key and Session Manager B appends B's certificate to the encrypted message and sends the message to A (steps 1504 - 1506).

Session Manager A receives the message, Public Key A decrypts the encrypted part of the message, and Maintain Security A validates B's certificate (steps 1508 - 1514). If the certificate is not valid, then Session Manager A notes the termination of the session and informs either the subscriber or the bank (steps 1516 - 1522). If the certificate is valid, then Maintain Security A checks if B is on the bad id list (steps 1524 - 1526). If B is on the list, then the session is terminated. If B is not on the list, then Maintain Security A retrieves the date and time and compares it to B's date and time (steps 1528 - 1530). If the date and time are out of range, then the session is terminated.

- 28 -

0           If the date and time are in range, then Random  
Number Generator A creates random number R(A) and an A  
verification message (step 1532). Maintain Security A  
then forms a session key by the operation  $R(A) \text{ XOR } R(B)$   
(step 1534). The A verification message, the B  
5 verification message, the time, date and R(A) are  
assembled into a message and encrypted with B's public key  
(step 1536). The message is sent to B by Session Manager  
A (step 1538). Session Manager B receives the message,  
Public Key B decrypts the message and Maintain Security B.  
10 checks the B verification message (steps 1540 - 1546). If  
the B verification message is incorrect, the session is  
terminated. If the B verification message is correct,  
then Maintain Security B forms the session key by  $R(A) \text{ XOR } R(B)$  (step 1548). The time and date are retrieved and  
15 compared to A's time and date to check if they are within  
a predefined range of each other (step 1550). If the time  
and date are out of range, then the session is terminated.  
If the time and date are in range, then Session manager B  
notes the start of the session (step 1552).  
20           Session Manager B then sends an acknowledgement  
and the A verification message to A (steps 1554 - 1556).  
Session Manager A receives the message and Maintain  
Security A checks the A verification message (steps 1558 -  
1562). If the verification message is not correct, the  
25 session is terminated. If the verification message is  
correct, then Session Manager A notes the start of the  
session (step 1564).

#### Transfer Notes

Figure 8 shows the transfer notes protocol.  
30 Note Directory X chooses the note(s) and values for  
transfer, updates the note amount(s) and sequence  
number(s), and then sends the message to Notes (step  
1566). Possible objectives in choosing the notes for  
transfer may, for example, be: (1) minimize the number of  
35 digital signatures (which requires processing time); (2)

- 29 -

0 minimize the size of the packet; (3) maximize the  
usefulness of the electronic notes left to the  
transferring subscriber (i.e., pass the notes with the  
shortest time left until expiration). Such objectives may  
be achieved by the following note transfer algorithm: (1)  
5 determine all possible alternatives which contain the  
least number of notes; (2) determine which of these  
alternatives have the least number of transfers; (3) if  
more than one choice is left from step 2, choose the one  
which has the least number of monetary unit days.  
10 Monetary-unit days = residual value of note to be  
transferred times the number of days left until the note  
expires, summed for all the notes in the packet.

Notes X, upon receiving the message from Note  
Directory X, creates a transfer to be appended to each  
15 note being transferred (step 1568). Public Key X creates  
signatures for the note(s) (step 1570). Packet Manager X  
then assembles the note(s) with their new transfer(s) and  
signature(s) in a packet and sends the packet to Y (steps  
1572 - 1574). Packet Manager Y receives the packet and  
20 disassembles it (step 1576).

Verify Y validates all certificates in the  
note(s) (e.g., money generator certificate and all  
transfer certificates). Then Verify Y verifies that the  
identification numbers in the transfer group match up with  
25 the module identification numbers of the certificates in  
the signature and certificate group throughout the history  
of the electronic note. Also, the consistency of the  
transfer amounts for each note is validated by ensuring  
that throughout the electronic note history the amount  
30 transferred in each successive transfer is less than that  
of the immediately precedent transfer. In addition, the  
total amount transferred is checked to ensure it is the  
amount expected. (Steps 1578 - 1580). If not valid, then  
the transaction is aborted (step 1582).

35 If valid and Y is a transaction money module,

- 30 -

then Verifier Y verifies the expiration dates of the note(s) (steps 1584 - 1588). If any of the note(s) have expired, then the transaction is aborted. If none have expired, then Verifier Y checks each id from the note transfers against the bad id list (steps 1590 - 1592). If  
5 any of the transfer id's are on the bad id list, then the transaction is aborted.

If the transfer id's are not on the bad id list (or Y is not a transaction money module), then Public Key Y verifies the validity of the note(s) signatures (steps  
10 1594 - 1596). If any of the signatures are not valid, then the transaction is aborted. If the signatures are valid, then Verifier Y checks if the note(s) bodies match note bodies that are stored by the Notes application or located in the Tran Log (steps 1598 - 1600). For each  
15 note body that matches, a note transfer tree is created in order to determine whether there has been any note duplication (steps 1602 - 1604). If any of the notes have been duplicated, then the transaction is aborted. This  
20 check for duplication (i.e., steps 1598-1604) is particularly directed to, and well suited for, thwarting individuals who attempt to create money by transferring notes by "self-dealing" using a compromised transaction money module.

If there are no duplicates, or if no matches of  
25 note bodies were identified, then Notes Y places the note(s) in the money holder (step 1606). Finally, Note Directory Y updates the note(s) location(s) and amount(s), and also initializes sequence number(s) (step 1608).

It may be understood that the Transfer Notes  
30 process includes steps for updating and initializing a sequence number to facilitate note reconciliation (see "Money Issued Reconciliation"), checking if the transferee of any note is on the bad id list, and checking for note duplication. These additional features and steps make it  
35 difficult for adversaries to introduce and circulate

- 31 -

° duplicated notes, and enhance the ability to detect duplicated notes in circulation.

#### Foreign Exchange

5 Figure 9 shows the protocol for a foreign exchange transaction using dollars and pounds as exemplary monetary units. Initially, A agrees to exchange with B dollars(\$) for pounds (£) at an exchange rate of \$/£ (step 1602). A and B then sign on their money modules and the modules prompt their subscribers for the type of transaction (steps 1604 - 1610). A chooses to buy foreign exchange and B chooses to sell foreign exchange (steps 1612 - 1614). A and B establish a secure transaction session (steps 1616 - 1620).

15 To Subscriber A prompts the owner/holder of A for the amount by type of note of dollars he wishes to exchange (step 1622). Pay/Exchange A receives the amount and Note Directory A checks if A has sufficient funds (steps 1624 - 1628). If the funds are not sufficient, then To Subscriber A prompts for a new amount which again is checked against existing funds (steps 1630 - 1632). If 20 no new amount is entered, then the transaction is aborted (step 1634).

If funds are sufficient, then Pay/Exchange A sends the dollar amount to B (steps 1636 - 1638). To 25 Subscriber B then prompts the owner/holder of B to select either the amount of pounds he wishes to exchange for the dollars or, alternatively, simply the exchange rate for the dollars (step 1640). Note Directory B checks for sufficient funds (steps 1642 - 1644). If funds are insufficient, then To Subscriber B prompts for a new rate and again existing funds are checked for sufficiency 30 (steps 1646 - 1648). If, however, no new rate is selected, then Pay/Exchange B informs A of its insufficient funds (steps 1650 - 1652). A may then select a new amount for exchange or abort the transaction (steps 35 1630 - 1634).

- 32 -

0           If B has sufficient funds for the transaction,  
then Pay/Exchange B sends A an acknowledgement and the  
amount of pounds to be exchanged (the equivalent rate is  
also sent) (steps 1654 - 1656). To Subscriber A prompts  
to verify the amount of pounds and the rate (steps 1658 -  
5   1660). If the amount and rate are incorrect, then  
Pay/Exchange A informs B that the amount and rate are  
incorrect (steps 1662 - 1664). To Subscriber B then  
prompts for a new rate (steps 1666 - 1668). If no new  
rate is chosen, then the transaction is aborted (step  
10   1670).

          If, however, A verifies the correct amount and  
rate of the transaction, then Pay/Exchange A passes the  
dollar amount to the money holder (step 1672). The dollar  
notes are then transferred from A to B (step 1674).  
15   Pay/Exchange B passes the pound amount to its money holder  
(step 1676). The pound notes are then transferred from B  
to A (step 1678).

          At this point in the transaction, both A and B  
provisionally hold foreign exchange notes in the correct  
20   amounts. A and B have each participated in two transfers:  
A transfers: (1) A transferred dollars to B; (2) A  
received pounds from B. B transfers: (1) B transferred  
pounds to A; (2) B received dollars from A. To complete  
the foreign exchange transaction, A must now commit (i.e.,  
25   finalize and permanently record in its transaction log)  
both of its two transfers. Similarly, B must commit both  
of its two transfers. Note that A may commit to the  
foreign exchange transfer A → B (dollars from A to B) and  
B → A (pounds from B to A) separately. Likewise B may  
30   commit to the foreign exchange transfers A → B and B → A  
separately.

          The next portion of the foreign exchange  
protocol is designed so that neither party knows the order  
in which the transacting money modules will commit. Such  
35   uncertainty will discourage parties from intentionally

- 33 -

trying to tamper with a transaction. As background, a function  $S(X)$  is defined so that  $S(0) = A$  and  $S(1) = B$ , where  $A$  and  $B$  refer to money modules  $A$  and  $B$ . Thus, if  $X$  is randomly chosen as 0 or 1, then money module  $A$  or  $B$  is randomly indicated.

The following routine is used to allow  $A$  and  $B$  to commonly establish a random  $X$ .  $R(A)$  and  $R(B)$  are the random numbers generated by  $A$  and  $B$ , respectively, during the Establish Session subroutine. The parity of  $R(A)$  XOR  $R(B)$  is determined (by exclusive - ORing each bit of  $R(A)$  XOR  $R(B)$ ). This parity is the random number  $X$ .  $\bar{X}$  is the complement of  $X$  ( $\bar{X} = X$  XOR 1).

Referring again to Figure 9, Tran Log  $A$  conditionally updates its transaction log to record the transfer  $S(X)$  to  $S(\bar{X})$  (step 1680). If  $X$  is calculated to be 0, then the transfer  $A$  to  $B$  (i.e., the dollar transfer) is conditionally recorded. If  $X$  is calculated to be 1, then the transfer  $B$  to  $A$  (i.e., the pound transfer) is conditionally recorded. Because the log is conditionally recorded, it may be rolled-back in the event money module  $A$  aborts the transaction. The update log becomes permanent once the log update has been set to unconditional (either as shown explicitly in the flow diagram or implicitly during a commit). Session Manager  $A$  then sends a "Log Updated" message to  $B$  (steps 1682 - 1684). In response, Tran Log  $B$  also conditionally updates its log to record the transfer  $S(X)$  to  $S(\bar{X})$  (step 1686).

If  $X = 1$ , then Tran Log  $B$  sets the log update to unconditional (steps 1688 - 1690). Thus, at this point,  $B$  has committed to its transfer of pounds to  $A$ . Next,  $B$  follows the Commit protocol (step 1692) described subsequently with reference to Figure 10. In this situation,  $A$  will commit to both its transfers (i.e., transferring dollars and receiving pounds) and  $B$  will commit to its one outstanding (uncommitted) transfer, namely receiving dollars.

- 34 -

0           If, however,  $X = 0$  (step 1688), then Session  
Manager B sends a "Start Commit" message to A (steps 1694 -  
1696). Tran Log A then sets its log update to  
unconditional (step 1698), thus committing to its transfer  
of dollars. The Commit protocol of Figure 10 is then  
5       called (step 1700). During this protocol (described  
subsequently) B commits to both its transfers (i.e.,  
transferring pounds and receiving dollars) and A commits  
to its one outstanding transfer, receiving pounds.

10           As can be seen, the F/X transaction commits each  
transfer of notes, thus keeping notes from being  
duplicated, which could occur if there were only one  
commit. The foreign exchange protocol ensures that  
neither party knows whose transfer (A's of dollars or B's  
of pounds) will be committed first. This reduces the  
15       incentive of a party to tamper with the transaction. Each  
transfer is committed separately, but the order of commit  
is chosen randomly by the two modules. A party who tries  
to interfere with the transaction has a 50-50 chance of  
losing money. Also, there is no incentive to interfere  
20       with the commit since the lost money can be reclaimed (see  
Claim Lost Money).

#### Commit

Figure 10 shows the Commit protocol for modules.  
Session Manager X sends a "Ready-to-Commit" message to Y  
25       (steps 1702 - 1704). This passes the obligation to commit  
to the module receiving the message. In a conventional  
money transfer scenario, this technique of passing the  
burden of committing first is used to ensure that the  
party transferring money commits first, so as to eliminate  
30       the possibility of duplicating money.

Session Manager Y then sends an acknowledgment  
to X (steps 1706 - 1708) and commits to any outstanding  
transactions by updating its transaction log (step 1710).  
Also, if Y is a transaction money module, then To  
35       subscriber Y notifies the subscriber of the successful



- 35 -

transaction (steps 1712 - 1714). Session Manager Y notes the end of the session (step 1716).

Tran Log X receives the acknowledgement from Y and updates its transaction log, thus committing to any outstanding transfers. X completes its commit in the same manner as Y (steps 1718 - 1724).

#### Abort Transaction

Figure 11 shows the Abort transaction protocol for modules. Session Manager X rolls-back changes and notes that the transaction is aborted (step 1726).

Session Manager X then checks if the "Ready-to-Commit" message has been sent (steps 1728 - 1730). If so, then X updates its transaction log (step 1732) by recording that X aborted after sending a Ready-to-Commit message and recording the note identifiers and amounts of each note received during the Transfer Notes protocol. Thus, the abort protocol logs information when the Abort subroutine is called during a failed Commit subroutine.

If X is a transaction money module 1186, and the Ready-to-Commit message was sent, then To Subscriber X informs its subscriber that the transaction was aborted and that there may have been a money transfer error (steps 1734 - 1738).

If X is a teller money module 1188, then To Bank X informs the bank that it should reverse its accounting transactions (by appropriate debits and credits) (steps 1740 - 1742). If X is a transaction money module 1186 and no Ready-to-Commit message has been sent, then To Subscriber X informs the subscriber that the transaction was aborted (step 1744).

In any event, Session Manager X then sends Y a message that the transaction cannot be completed (steps 1746 - 1748). Session Manager Y rolls-back its changes and notes the transaction as aborted (step 1750). Y then informs its subscriber that the transaction is aborted (steps 1752 - 1754) or informs the bank to reverse its

- 36 -

accounting transaction (steps 1756 - 1758).

As described, if a transaction is interrupted during a commit protocol, it is possible that notes will be lost. If this occurs, the transferee will have aborted and the transferor will have committed to the transfer of notes. In this case, the transferee money module records information about the notes it should have received and notifies the subscriber that there is a potential problem (i.e, it did not receive the notes sent by A). It may be noted that in this circumstance, as far as the transferor money module is concerned, it properly transferred the notes.

The transferee money module subscriber can then make a claim for the money to the Certification Agency. The claim information would include the log record of the failed transaction. The Certification Agency could then check with issuing banks to see if the notes have been reconciled. After some period of time, if the notes have not been reconciled, the subscriber could reclaim his money.

#### POS Payment

Figure 12 shows a Point of Sale (POS) payment protocol. The POS Payment protocol is intended to simplify payments made between a buyer's transaction money module 1186 and a merchant's transaction money module 1186. The merchant's transaction money module 1186 may, for example, be located in a cash register at a supermarket.

Initially, A agrees to purchase products or services from B (step 1760). The owner/holder of transaction money module A signs onto his money module (step 1762). To Subscriber A prompts the owner/holder for a transaction and A chooses to make a POS payment (steps 1764 - 1766). Meanwhile, the merchant determines the total purchase price (step 1768). To Subscriber B prompts for a transaction and B chooses to receive a POS payment

- 37 -

(steps 1770 - 1772). A and B then establish a secure session (steps 1774 - 1776).

To Subscriber B prompts for amount of payment and Pay/Exchange B receives the amount and sends it to A (steps 1778 - 1782). To Subscriber A then prompts its subscriber to verify the requested amount (steps 1784 - 1786). Moreover, the subscriber is requested to choose the notes in which it will pay (e.g., currency or credit) and the amounts so that the total equals the requested amount. If the requested amount is not correct, then Pay/Exchange A sends B a message indicating that the requested amount is incorrect (steps 1788 - 1790). To Subscriber B then prompts its host for a new amount (steps 1792 - 1794). If a new amount is not chosen then the transaction is aborted (step 1796).

If the requested amount is correct, then Pay/Exchange A receives amounts by type of note (step 1798). Note Directory A then checks for sufficient funds (steps 1800 - 1802). If funds are insufficient, then To Subscriber A prompts for new amounts by type of note (steps 1804 - 1806). If no new amount is entered, then Pay/Exchange A sends B a message that it has insufficient funds (steps 1808, 1790). To Subscriber B prompts host for new amount (steps 1792 - 1794). If no new amount is selected, then the transaction is aborted (step 1796). If a new amount is selected, then the payment transaction begins again.

If funds are sufficient, then Pay/Exchange A passes the amount to the money holder (step 1810). The notes are then transferred from A to B (step 1812). Finally, the transaction money modules commit (step 1814).

As can be seen, the POS payment is simplified for the buyer because it is a payee initiated payment. Generally, the POS payment would be used for payment to merchants for goods while the subscriber-to-subscriber (STS) payment would be used to pay individuals or to pay

- 38 -

bills.

#### Update Credit from Issuing Bank

Figure 13 shows an Update Credit from Issuing Bank transaction protocol, and particularly describes how subscribers acquire a credit note which is a preauthorized credit payment vehicle. A subscriber can carry up to one credit note for each credit account the subscriber owns. Note that every bank which allows a subscriber to receive updated credit notes is an issuing bank for those credit notes.

The process flow to set up an update credit transaction begins with a Setup Credit process between a money module A and a bank's Teller money module B, (step 1854), which is now described further with reference to Figure 14.

#### Setup Credit

The Setup Credit Withdrawal process begins when owner/holder of transaction money module A decides to make a credit update and thus signs onto his money module (step 1876). For instance, subscriber A may possess a credit note but wish to change (e.g., increase or decrease) the credit amount including decreasing the amount to zero, or may not currently possess a credit note but wish to acquire one. To Subscriber A prompts the owner/holder for a transaction, and A chooses to make a credit update of a particular amount from a particular bank and account (steps 1878 - 1880). In this implementation, the credit update amount specified by subscriber A is the total credit amount that subscriber A wishes to carry. Then, the Transaction money module A initiates a procedure for communicating with the bank that was selected by engaging the network via the Network Sign On procedure described hereinabove (step 1882).

After the steps of money module sign-on, transaction selection, and network sign-on are completed, A and B then establish a secure session (step 1884).

- 39 -

Then, Transaction money module A makes a credit request from the Teller money module B (step 1886), according to a Request Credit procedure more fully described with reference to Figure 15.

#### Request Credit

Referring now to Figure 15, a process for requesting credit will now be described. It should be noted that although the figure denotes the parties as "X" and "Y," in the process steps described below, they are applicable to any money module transacting with a Teller money module.

To begin, if there is a credit note for the selected account Note Directory X sends the amount of this credit note to To Teller X (step 1897). To Teller X determines the net difference between the total credit amount requested by subscriber A and the credit note amount and sends a credit update request to the Teller money module, requesting a certain net amount of credit to be authorized from a specific account. In it's transmission of the update credit request, the account number and the account profile will be transmitted from the requesting money module to the Teller money module along with the net credit amount (step 1898). This message is sent according to the Send Message protocol (step 1900), in which the message is encrypted using the described cryptographic techniques.

Once the credit withdrawal request and the account number and profile are transmitted to the Teller money module, a procedure to validate the account number is initiated (Step 1902). A flow diagram depicting how an account number is validated is shown in Figure 20, which is described separately below for clarity of exposition.

With the account information validated, To Bank Y verifies that there is sufficient credit to support the credit update request amount (Step 1904). Sufficient credit will prompt To Transaction Y to send an

- 40 -

acknowledgement to X, which receives the acknowledgement via its To Teller application function (steps 1906-1912).

An insufficient amount of credit, however, will cause the subscriber to be prompted to enter a new amount for the credit update (steps 1914-1918, Figure 15B).

Entry of a new amount for credit update by the subscriber results in the To Teller application sending the new credit amount to the To Bank application of the Teller money module to verify if there are sufficient funds to cover the latest requested amount (steps 1922 - 1924), returning to Step 1904 of Fig. 15A. If no new amount is requested by the subscriber, then the transaction is aborted (step 1926).

Referring back to Figure 14, upon return from the Request Credit Withdrawal process, To Teller A invokes a transfer of the total currency notes, transferred credit notes (i.e., credit notes received in previous transactions) and credit note for the account to the Teller money module (Step 1888). If there are no notes being held in the Transaction money module at the time the credit withdrawal request is made, the To Teller A application sends a message to the Teller money module that there are no notes present (steps 1892-1894). If there are notes being held in the Transaction money module, however, then the electronic notes are transferred from A to Teller B according to the Transfer Notes procedure described hereinabove with reference to Figure 8 (step 1896).

Returning to Figure 13, To Transaction B checks if any currency notes and transferred credit notes have been transferred (steps 1856 - 1858), and if any of these type of notes have indeed been transferred from Transaction money module A, accounting transactions are posted to reflect this situation by the To Bank application B (step 1860). Both in the case when no notes have been transferred from the money module and after the

- 41 -

0     accounting transactions are posted in step 1860, a session  
is established between the Teller money module and the  
Money Generator module (step 1862). To Bank B updates the  
credit line by adding the amount of the credit note (if  
5     any) to the available line of credit to get the total  
available credit and deducting the requested credit amount  
from the total available credit. If no notes (including  
currency notes and credit notes) are to be created because  
the requested credit amount was zero and no currency notes  
10    were transferred, then the money modules will finalize the  
transaction according to the Commit procedure described  
hereinabove with reference to Figure 10 (steps 1865 -  
1875).

      If, however, any notes (credit or currency) are  
to be created, due to a nonzero credit amount request  
15    and/or transferred currency notes, then notes are  
requested by Teller B from Money Generator module  
according to the Request Notes procedure (steps 1865 -  
1866). The requested notes in the Money Generator module  
are transferred to the Teller money module B using the  
20    Transfer Notes process outlined above (see Figure 8) for  
transferring electronic notes (step 1868). The notes are  
then transferred from the Teller money module B to the  
Transaction money module using the same Transfer Notes  
process (step 1870). Finally, to successfully complete  
25    the update credit procedure, the money modules will  
finalize the transaction according to the Commit procedure  
described hereinabove with reference to Figure 10. The  
Commit process is initiated first by the Transaction money  
module committing its transaction with the Teller money  
30    module B (step 1872). Then, the Commit process is  
executed between Teller money module B and the Money  
Generator module (step 1874). That completes the  
processing for one complete credit update from an Issuing  
Bank.

35

- 42 -

Money Issued Reconciliation

The process of note reconciliation checks for note counterfeiting and duplication, and is described with reference to Figure 16 and Figure 17. The Money Issued Reconciliation system, based on the information stored in the Money Issued Master file, constructs a note transfer tree which models the transfer history of the note.

Figure 16 schematically illustrates a hypothetical series of transactions among a Money Generator Module having an identifier number "1" (referred to as Money Generator 1), a teller money module having identifier "2" (referred to as teller module 2), and four transaction money modules having integer identifiers 3 through 6 (referred to as transaction modules 3-6), associated with a single note generated by Money Generator 1 at the date/time indicated by 1:00:00.

In accordance with the example of a transfer history shown in Figure 16, Figure 17 illustrates how the transfer of an electronic representation of currency produces a tree-like structure of electronic representations of currency derived from the initial note produced by a money generator module. As individual transfers (part of a tree branch) of the note are deposited or return to the banking system according to note updating, the note transfer tree in figure 17 is built by the Money Issued Reconciliation system. In this example, money generator 1 (module identifiers are contained in digitally signed certificates) produces an electronic representation of currency 2300 having a body group of data fields and a transfer group of data fields, which are shown schematically in part for purposes of clarity of exposition. In addition, the signatures and certificates group of data fields is not shown for convenience.

The body group of data fields includes a note identifier (e.g., "N12"), a money generator module



- 43 -

identifier (e.g., "MG1"), an issuing bank identifier (e.g., "Bank Name"), a date-of-issue (e.g., 1:00:00), a date-of-expiration (e.g., 12:00:00), a note amount and a monetary unit identifier (e.g., \$50). Other body group data fields such as type of note are not shown for convenience. The various date fields in the electronic notes are shown for illustrative purposes as being in the form day:hr:min. Other time monitoring forms (e.g., including seconds) are, of course, possible.

The transfer group of data fields includes a transfer record having a transferee identification number, a date-of-transfer, and a transfer amount. The transfer group also preferably includes a sequence number which is incremented by the note directory of the transferor after each transfer. Normally, the date/time and transfer id of the transfer should be sufficient to uniquely identify a transfer. However, it might be possible that a transfer, transferee id, date/time, and amount could duplicate if there is a time adjustment between transfers and the same amount is transferred to the same module. Thus, to avert this potential problem, a sequence number (seq) is preferably added to the transfer record and the note directory to uniquely identify the transfer. The sequence number will be incremented by the note directory after every transfer. If a sequence number is reset, then this would be detected as a duplicate.

Thus, when electronic representation of currency 2300 is transferred to teller module 2, transfer record 2302 is appended to the transfer group, and includes the transferee identification number (e.g., "2"), the date-of-transfer (e.g., 1:00:00), the transfer amount (e.g., \$50), and the sequence number (e.g., "1"). For illustrative convenience, the note transfers represented in Figure 17 only show the newly appended transfer record portion of the transferred note. Also for convenience, the transfer group data field indicating total number of

- 44 -

transfers is not shown.

The electronic representation of currency 2300 from money generator 1 is stored in a teller module 2. As part of the withdrawal of \$50 by transaction module 3, teller module 2 forms an electronic representation of currency by appending transfer record 2304 to a copy of the data fields in the electronic representation of currency 2302 augmented by transfer record 2302. This note is then stored in transaction module 3 upon completion of the withdrawal. It may be understood that each node of the note transfer tree shows the newly appended transfer record portion of the transferred note.

As represented by the note transfer tree, at 1:00:05, transaction module TR3 pays \$10 by transfer record 2306 to transaction module 4. At 1:01:00, transaction module 3 pays \$10 by transfer record 2308 to transaction module 5. At 3:08:01, transaction module 3 pays \$25 by transfer record 2310 to transaction module 5. At 4:11:08, transaction module 3 transfers \$5 by transfer record 2312 to transaction module 6.

At 2:00:01, transaction module 4 transfers \$5 by transfer record 2314 to transaction module 6. At 2:01:07, transaction module 4 transfers an additional \$5 by transfer record 2315 to transaction module 6, which in turn, at 3:07:05 transfers \$5 by transfer record 2321 to transaction module 3.

At 2:00:06, transaction module 5 transfers the entire \$10 note to transaction module 3 by transfer record 2316. From the \$25 note received at 3:08:01 by transaction module 5 from transaction module 3, at 3:09:12 transaction module 5 pays transaction module 6 \$20 by transfer record 2318, and deposits the remaining \$5 to teller module 2 at 4:12:05 by transaction record 2320.

At 4:10:00, transaction module 6 transfers \$10 to transaction module 5 according to transfer record 2322, and at 5:00:06 transfers the remaining \$10 to transaction

- 45 -

module 3 by transfer record 2324. In accordance with an embodiment of the present invention, it is understood that upon deposit of money from a transaction module to a bank, all notes (including credit notes) in the transaction module are sent to the banking system and are updated. Therefore, substantially simultaneous with the above described deposit from transaction module 5 to teller module 2 represented by transfer record 2320, an additional and concurrent transfer represented by transfer record 2326 occurs automatically. Then, a new note having a value of \$5 (assuming transaction module 3 had no credit notes) will be generated by money module 1 and transferred to transaction module 3 via teller module 2, with the appropriate transfer records appended (not shown). Accordingly, it may be appreciated that updating all notes in a transaction money module upon a transaction (e.g., deposit or withdrawal) between the transaction module and a teller module facilitates the note reconciliation process by providing an additional means for returning notes to the banking system.

At 5:00:10 transaction module 3 deposits \$10 to teller module 2 by transaction record 2328. As described above for the deposit by transaction module 5, concurrent with the deposit by transaction module 3 represented by transaction record 2328, additional and concurrent transfers (not shown) to the banking system of all notes possessed by transaction module 3, including those represented by transfer record 2316 and transfer record 2321, occurs. Then, the banking system returns to transaction module 3 a note having a value equal to the total notes sent to the banking system for updating (e.g., \$15).

Thus, at this point in time, only transaction module 6 possesses transferable vestiges of original note 2300, as represented by transfer notes 2312 and 2314. If transaction module 6 transacts (e.g., deposit or

- 46 -

withdrawal) with a teller module before transferring these notes to other transaction money modules, then there will be no transferable notes in circulation that relate to original note 2300; all notes derived from transfers of original note 2300 will have been returned to the banking system, permitting complete construction of the note transfer tree shown in Figure 17. The date-of-expiration effectively facilitates note reconciliation by limiting the time that a note may be transferred.

From the note transfer tree, it may be understood that if the note were counterfeit then there would be no note body to match the first piece deposited. If a transfer were duplicated then the transfers below would sum to a value greater than the superordinate transfer amount. For example, if transaction module 6 transferred \$20 to transaction module 3 at 5:00:06, instead of \$10 (i.e., transfer record 2324), then the transfers below transfer record 2318 (i.e., SEQ1, 3:09:12, TR6, \$20) would sum to \$30 denoting that transaction module 6 had duplicated the transfer.

Link Money Module to Bank Account(s) for Bank Access

Figure 18 shows the protocol for linking a money module to bank accounts for bank access. The process begins when a subscriber identifies him/herself to a customer service representative (CSR) and requests that the CSR link the subscriber's accounts to a money module (step 1928). The CSR enters a request into CSM host A (CSMHA) to link accounts for the identified subscriber, and CSMHA accesses the identified subscriber's account information from the bank systems (steps 1930 - 1934). Then, the subscriber and the CSR verify the account information, and the subscriber selects which accounts to link to the money module (step 1936).

After the subscriber requests that his/her money module B link bank accounts and the CSR requests, via CSMHA, that CSMA link bank accounts, a secure session is

- 47 -

established between the subscriber's money module B and the CSMA (steps 1938 - 1946). Then, in response to a request from To Host A of CSMA, HCSMA sends the account information to CSMA, which receives the account information and constructs an account profile therefrom (steps 1948 - 1952). Public Key A then signs the account profile, and Create Account Profile constructs a message from the account profile and signature and sends this message to money module B (steps 1954 - 1958). Maintain Security B receives the message, and Public Key B checks the digital signature on the message (steps 1958 - 1962). If the signature is invalid, then the session is aborted (step 1966).

If the signature is valid, then To Subscriber B sends the profile to the host in order for the customer to verify the account profile. If the customer does not affirm the account profile, then the transaction is aborted. If the customer affirms the account profile, Maintain Security B adds the CSM certificate to the account profile (step 1968).

To Teller B then checks to determine whether an account profile is already stored for the bank associated with the recently created ("new") account profile. If an account profile for the bank already exists in the To Teller B application, then it is replaced by To Teller B with the new account profile; otherwise, To Teller B adds the new account profile. (Steps 1970 - 1974).

#### **Revalidate Money Module Link to Bank Accounts**

Figure 19 shows the protocol for a subscriber to revalidate the subscriber's money module link to bank accounts. The process begins when the subscriber signs on to his/her money module, and in response to a prompt for a transaction generated by To Subscriber A, the subscriber chooses to revalidate a bank account link for a bank associated with a customer service module (CSM) B (steps 1978 - 1982). The money module invokes and executes the

- 48 -

network sign-on protocol described with reference to Figure 6, hereinabove, and a secure session is established between money module A and CSMB (step 1986). To Teller A then sends the account profile for the bank accounts to CSMB (steps 1988 - 1990). Create Account Profile B receives the message, and Maintain Security B validates the CSM certificate and the signature of the account profile (steps 1992 - 1995). If the certificate or signature is invalid, then the CSM aborts the transaction (step 2000). If the certificate is valid, To Host B sends the list of accounts from the account profile to the CSM host (CSMH), which checks with the on-line banking system to determine whether each account is currently active (steps 1996 - 2001). If any of the accounts has expired, CSMH signals an abort message to CSM (step 2010), which then aborts the transaction according to the Abort process (step 2000).

If all the accounts are active, then CSMH signals a revalidate instruction to CSM, and Create Account Profile B receives the message and constructs an account profile from the account information (steps 2002 - 2004). Public Key B then signs the account profile, and Create Account Profile B constructs a message from the account profile and signature and sends this message to money module A (steps 2006 - 2010). Public Key A receives the message and verifies the digital signature (step 2012). If the signature is invalid, money module A aborts the transaction (step 2018); if it is valid, the profile signature and the CSM certificate is added to the account profile (step 2014), and money module A commits the transaction (step 2016).

#### Validate Account Number

In accordance with an embodiment of the invention employing a customer services module (CSM), which is described hereinabove, a flow diagram depicting how an account number is validated is shown in Figure 20.

- 49 -

In this process, Maintain Security Y receives the account number and account profile, including the CSM certificate, and verifies the CSM certificate (step 2020). An invalid certificate causes the transaction between the two money modules to be aborted (step 2028).

If the certificate is valid, Maintain Security Y conveys the account profile to Public Key Y to verify the CSM signature (steps 2022). An invalid signature causes Maintain Security Y to inform the Session Manager that the account profile is invalid (Step 2026), and the transaction between the two modules is aborted (step 2028).

If the signature test confirms a valid signature, the procedure advances to To Bank Y which sends the account number it has received to the bank's on-line computer system (step 2024). An inactive account will cause Maintain Security Y to inform the Session Manager of the inactive account (step 2030) and have the transaction aborted (step 2028); an active account will cause the Validate Account Number process to return to the next step in the operational flow that invoked the Validate Account Number process.

As can be seen, the Validate Account Number process is simplified for the Teller money module as compared to an embodiment of the present invention that does not include a CSM.

#### Claim Lost Money

As has been discussed, electronic money could be lost for any of several reasons, including: (1) the money module is damaged and no longer functions; (2) the money module is lost or stolen; or (3) the commit fails. It is important to the utility of a monetary system that the subscriber to the system feel confident that their money is safe. Thus it is important that the transferee be able to reclaim money lost through system failure. Being able to replace money when the money module is damaged would

- 50 -

improve confidence since electronic failure is more likely than the loss of a paper by physical damage. Replacing money because of mishaps due to a lost or stolen money module is more problematic. Allowing such claims could invite widespread claims on the system, since subscribers would not take precautions against loss.

In any case, embodied in the present invention are methods that allow money lost in either of these cases to be replaced. In the first two cases (i.e., cases (1) and (2) above), the subscriber would have to periodically create a lost note(s) claim (see figure 21) which could be stored outside the money module. Upon failure, the claim could be submitted with the subscriber's identity to an issuing bank (see figure 22). The claim would contain the last known state of the subscriber's money module. A description of the claimed notes could be validated and distributed to the issuing banks. The issuing banks could replace the money after a period of time if the claimed notes have not been deposited.

In the case wherein the commit fails (i.e., case (3)), the claim is created interactively between the money module and a customer service module, if the money module is still functioning (see figure 22). This claim, as in cases (1) and (2), is passed to the Money Issued Investigation System, which monitors the claim against money deposited. The issuing banks can feel confident in replacing lost money because they can monitor the incoming money against fraudulent applications and they have the applicant's identity.

These methods are more fully described with reference to Figure 21 and Figure 22.

#### Create Lost Note(s) Claim

Referring now to Figure 21A, there is shown a Create Lost Note(s) Claim process which may be practiced in accordance with an embodiment of the present invention. The process begins when a subscriber signs on to a money



- 51 -

module, To Subscriber A prompts the subscriber for a transaction, and the subscriber selects a Create Lost Note(s) Claim option (steps 2032 - 2036).

Then, several steps occur which consolidate all notes and unclaimed failed commits (steps 2038 - 2042). Specifically, Note Directory A creates a unique claim sequence number (which is used for identifying a claim) and conveys a copy of the Note Directory with the sequence number to the Packet Manager. Notes A conveys a copy of all notes with signatures and certificates to Packet Manager. Then, Tran Log A sends all unclaimed failed to Commit transactions that were logged during the Abort process to the Packet Manager.

Next, Public Key A uses a money module private key to sign the claim sequence number, note directory, notes, and failed Commits that were sent to the Packet Manager, and Packet Manager A appends the signature to the assembled data, resulting in an assembled data packet (steps 2044 - 2046), which is then encrypted by Public Key A (step 2048). To the encrypted claim, Public Key A then appends a claim description consisting of the claim sequence number, the total value amount of the claim, and the certificate of money module A (step 2050). To Subscriber A sends this claim to the money module host, which receives and stores the claim--on a medium physically independent of the money--for future use (steps 2052 - 2054).

It is understood, therefore, that the Claim Lost Notes process provides a method for generating and protecting potential money claims which are not destroyed by damage to, or failure of, a money module.

#### Claim Lost Notes

Figure 22 shows the protocol for claiming lost notes, which begins when a subscriber requests to make a claim for lost notes to a customer service representative (CSR), the subscriber's identity being revealed to the CSR

- 52 -

0 (step 2056). CSR then conveys the subscriber's identity  
to customer service module host (CSMH) A, and checks  
whether the claim is due to a failed commit or due to a  
loss or destruction of the money module (steps 2058 -  
5 2060). If a failed commit is the basis for the claim (and  
the subscriber's money module has not been lost or  
damaged), then upon the subscriber's selection to make a  
claim for lost notes from the money module and the CSR's  
selection to receive a claim for lost notes from a money  
10 module, Session Manager B of the subscriber's money module  
and Session Manager A of a customer service module (CSM)  
associated with the customer service representative (via a  
customer service module host (HCSM)) are respectively  
invoked to establish a secure session between CSM A and  
money module B (steps 2062 - 2070).

15 Once a secure session is established, To Host A  
of the CSM requests the identity of the subscriber, and  
HCSM A responds to this request by sending a message  
containing the subscriber identity to CSM (2072 - 2074).  
Claim Lost Notes A receives this message and sends to  
20 money module B a message indicating that the claim should  
be sent (steps 2076 - 2078).

Tran Log B receives this message and retrieves  
failed commit records that have not been claimed (step  
2080). If no failed commit records are located, then the  
25 transaction is aborted (step 2083). Otherwise, To  
Subscriber B sends information (e.g., date, time, and  
amount) from the retrieved failed commit records to the  
subscriber for review (step 2082). From this information,  
the subscriber selects the transactions to be claimed  
30 (step 2084). For instance, the subscriber would not  
select failed commit transactions that have been resolved  
separately. Then, for each failed commit transaction  
selected by the subscriber, Tran Log B constructs a  
message containing log information for these transactions,  
35 and sends this message to CSM (steps 2086 - 2088).

- 53 -

°  
Claim Lost Notes A receives this message and sends to B an acknowledgement including a claim identifier (e.g., a confirmation number) for future reference to the claim (step 2092). Tran Log B receives the  
5 acknowledgement and marks each selected failed commit transaction record with the date/time of the claim and with the claim identifier provided by the CSM (step 2094). Then, B commits to the transaction (step 2096).

After the commit procedure is completed, from the received message containing failed commit transaction  
10 information Claim Lost Notes A constructs a claim to be sent to the Money Issued Investigation System (MIIS) which preferably forms part of the Transaction Investigation System. To Host A sends this claim to HCSMA, which receives the claim and further sends the claim to the  
15 MIIS. (Steps 2098 - 2102).

Returning now to step 2060 of Figure 22, if the claim were not due to a failed commit (e.g., due to a lost or damaged money module), then the subscriber may choose to make a claim for lost notes from a host B that has  
20 access to any of the subscriber's claims that were generated and off-loaded from the money module computing environment (e.g., onto a FLASH memory) in accordance with the Create Lost Note(s) Claim process described  
25 hereinabove with reference to Figure 21. CSR separately chooses to initiate a process to receive a claim for lost notes from a money module host and the hosts establish a communication link according to any known technique (steps 2104 - 2108).

Then, the subscriber host B sends the claim, including the money module certificate, to CSMHA which  
30 sends the claim to CSMA (steps 2108 - 2112). Claim Lost Notes A receives the claim and sends the claim to Public Key A which validates the money module certificate (2114 - 2116). If the money module certificate is invalid, then  
35 To Host A sends CSMHA a message indicating that the claim

- 54 -

has been rejected, and CSMHA routes this message to the subscriber host B, and the Claim Lost Notes process is terminated (steps 2120 - 2121).

If the money module certificate is valid, Public Key A decrypts the claim and verifies all note certificates and signatures within the claim (step 2118). If any of the note certificates and signatures are not valid then the transaction is terminated (steps 2119 - 2121). If the note certificates and signatures are valid, then Claim Lost Notes A, verifies the consistency of transfer amounts to ensure that the value of the money conveyed to a transferee is not greater than that received by the transferor for the transfer history of each note (step 2122 - 2123). If there is an inconsistency then the transaction will be terminated (steps 2120 - 2121).

If, however, the transfer amounts are consistent for all notes, then Claim Lost Notes A constructs a claim to be sent to the MIIS, and also generates a claim identifier to be associated with the claim. To Host A then sends the constructed claim and claim identifier to CSMHA, which receives the claim and claim identifier and appropriately routes the claim identifier to subscriber host B and sends the claim to the MIIS. (Steps 2124 - 2128), thus completing the Claim Lost Notes process.

Although the above description provides many specificities, these enabling details should not be construed as limiting the scope of the invention, and it will be readily understood by those persons skilled in the art that the present invention is susceptible to many modifications, adaptations, and equivalent implementations without departing from this scope and without diminishing its attendant advantages. It is therefore intended that the present invention is not limited to the disclosed embodiments but should be defined in accordance with the claims which follow.

- 55 -

I claim:

1. A system for transferring electronic notes between processor-based electronic modules comprising:  
processor-based electronic modules each capable of creating a cryptographically secure channel and transferring and receiving electronic notes via said cryptographically secure channel, and where each said electronic module has a memory for storing said electronic notes;

wherein each stored electronic note comprises:

a body group of data fields including data indicative of a monetary value associated with said electronic note;

a transfer group of data fields including a list of transfer records, where each transfer record is generated by a transferor electronic module and includes a sequence number that distinguishes a transferred electronic note from other transferred electronic notes transferred from said transferor electronic module.

2. The system of claim 1, wherein said monetary value is an original monetary value associated with said electronic note, and said transfer records further include a transferred monetary value.

3. A payment method using a first money module to transfer an electronic representation of money to a second money module, comprising the steps of:

(a) establishing a cryptographically secure session between said first money module and said second money module where said first and second money modules are tamper-proof modules;

(b) said second money module prompting a

- 56 -

- second subscriber for transaction terms, and said second subscriber supplying transaction terms to said second money module;
- 5 (c) said second money module sending said transaction terms to said first money module, via said cryptographically secure session;
- 10 (d) said first money module prompting a first subscriber to verify said transaction terms, and said first subscriber supplying a verification of said transaction terms;
- 15 (e) said first money module transferring said electronic representation of money to said second money module, via said cryptographically secure session;
- 20 (f) said first money module committing to said electronic money transfer by logging said electronic money transfer so that said first money module can no longer abort said electronic money transfer by rolling-back its state; and
- 25 (g) said second money module committing to said electronic money transfer by logging said electronic money transfer so that said second money module can no longer abort said electronic money transfer by rolling-back its state.
- 30

4. The payment method of claim 3, wherein said transaction terms include a monetary amount of said electronic representation of money, and wherein said step  
35 of said first subscriber supplying a verification includes

- 57 -

designating an apportionment of said monetary amount between credit and currency.

5. A method for transferring electronic notes between processor-based electronic modules, comprising the steps of:

establishing a cryptographically secure session between a transferor electronic module and a transferee electronic module;

creating a transfer electronic note by appending a transfer record to an electronic note stored in said transferor electronic module, where said transfer record indicates whether all or some portion of a monetary amount of said electronic note is being transferred;

transferring said transfer electronic note from said transferor electronic module to said transferee electronic module; and

wherein said transfer record includes a sequence number that distinguishes said transfer electronic note from another transfer electronic note from said transferor electronic module.

6. A method for an electronic module to sign-on to an electronic monetary system network having a network server that links said electronic module to a security server, comprising the steps of:

said electronic module sending its certificate to said network server;

said network server generating a random key and a random verification number, and sending an encrypted message including said certificate, said random key, and said random verification number to said security server;

said security server decrypting said encrypted message, storing said random key and random verification number, and verifying the validity of said

- 58 -

certificate;

said security server establishing a secure communication session with said electronic module;

said security server sending updated security information, that is digitally signed by a cryptographic key of said security server, to said electronic module;

said electronic module verifying the validity of said digitally signed updated security information, and updating stored security information with said updated security information;

said security server sending said random key, and said random verification number to said electronic module, and ending said secure communication session;

said electronic module generating a destination message by encrypting said random verification number and a destination with said random key, and sending said destination message to said network server;

said network server decrypting said message and verifying said random verification number; and

said network server establishing a link to said destination.

7. The method according to claim 6, wherein said electronic module is a transaction module, a customer service module, a money generator module, or a teller module.

8. The method according to claim 6, further comprising the steps of:

said electronic module sending its date and time information to said security server;

said security server checking said date and time information to determine if it is outside of an acceptable predetermined parameter; and



- 59 -

said security server, where said date and time information is outside said acceptable predetermined parameter, sending a new date and time to said electronic module in order to synchronize said electronic module.

5           9. The method according to claim 6, wherein said encrypted message between said network server and said security server is provided using a local symmetric key stored in said network server and in said security server.

10           10. The method according to claim 6, wherein said updated security information includes an updated list of bad electronic module and security server identification numbers, an updated public key list, and an  
15           updated key length.

20           11. The method according to claim 6, wherein said step of said security server establishing a secure communication session with said electronic module includes a public key exchange protocol to provide a session key common to said security server and said electronic module.

25           12. The method according to claim 6, further comprising the step of said security server recertifying said certificate.

30           13. The method according to claim 12, wherein said step of recertifying occurs in response to said security server sending a recertification request message to said electronic module.

35           14. The method according to claim 12, wherein said certificate includes an expiration time, and wherein said step of recertifying occurs in response to said electronic module determining that said certificate has

- 60 -

expired.

15. An electronic module based monetary transaction system, comprising:

a primary security server;

a plurality of secondary security servers each having a unique security server certificate digitally signed by said primary security server;

a plurality of tamper-proof electronic modules each having a unique module certificate that is digitally signed by one of said secondary security servers, a memory that stores electronic representations of money, and a processor adapted to provide a cryptographically secure channel for transferring and receiving said electronic representations of money; and

wherein said security server certificate is validated upon said secondary security server interacting with said electronic modules or with said primary security server; and

wherein said module certificate is validated upon said electronic module interacting with other of said electronic modules or with said security servers.

16. The system according to claim 15, wherein said module certificates and said security server certificates have expiration times, and wherein said electronic modules are adapted not to transact with other electronic modules or secondary security servers having expired certificates.

17. The system according to claim 15, wherein each of said plurality of electronic modules, said primary security server, and each of said plurality of secondary security servers have a unique identifier indicative of server type or electronic module type.

- 61 -

18. The system according to claim 17, wherein said electronic module type includes a transaction module, a customer service module, a money generator module, and a teller module, and wherein said server type includes said primary security server and said secondary security servers.

19. The system according to claim 17, wherein each said server type and each said electronic module type is associated with a unique range of a type variable, and wherein each said unique identifier maps to a value of said type variable within said unique range assigned to said server type or electronic module type according to a mapping mechanism securely stored in each said electronic module, each said secondary server, and said primary server.

20. The system according to claim 19, wherein each said unique identifier is a unique integer value less than a predetermined prime number, and wherein said value of said type variable is generated according to raising a primitive root of said prime number to a power of said unique identifier under modulo arithmetic over said predetermined prime number, and wherein each of said plurality of electronic modules, said primary security server, and each of said plurality of secondary security servers securely stores said primitive root and said prime number.

21. The system according to claim 15, wherein said primary security server maintains a list of said unique identifiers for bad electronic modules and bad secondary security servers, and wherein said list is provided to said secondary security servers and to said electronic modules.

- 62 -

22. The system according to claim 15, wherein said security server certificate is encrypted by said primary security server, and said module certificate is encrypted by said secondary security server.

5 23. The system according to claim 22, wherein said security server certificate comprises:

10 a first and second data field encrypted with the private key of said primary security server, wherein said first data field includes a unique identifier of said secondary security server, a public key of said security server, and an expiration time of said security server certificate, and wherein said second data field includes said first data field digitally signed by said primary security server; and

15 a third data field including a unique identifier of said primary security server.

20 24. The system according to claim 23, wherein said unique identifier of said primary security server is encrypted.

25 25. The system according to claim 22, wherein said module certificate comprises:

30 a first and second data field encrypted with a secondary security server's private key, wherein said first data field includes a unique identifier of said electronic module, a public key of said electronic module, and an expiration date of said module certificate, and wherein said second data field includes said first data field digitally signed by said secondary security server; and

a third data field including said security server certificate.

35 26. The system according to claim 15, wherein

- 63 -

° said primary security server and said secondary security servers share a common symmetric key which is periodically changed using public-key key exchange.

5 27. The system according to claim 15, wherein said primary security server selectively commands global recertification for said security server certificates and said module certificates.

10 28. A payment method using a first money module to transfer an electronic representation of money to a second money module, comprising the steps of:

15 establishing a cryptographically secure session between said first money module and said second money module where said first and second money modules are tamper-proof electronic modules;

20 said first money module transferring an electronic representation of money to said second money module, via said cryptographically secure session;

said second money module sending a ready-to-commit message to said first money module;

25 said first money module sending an acknowledgement to said second money module in response to said ready-to-commit message, and then committing to said electronic money transfer so that said first money module can no longer abort said electronic money transfer by rolling-back its state; and

30 said second money module, after receiving said acknowledgement, committing so that said second money module can no longer abort said electronic money transfer by rolling-back its state.

35

- 64 -

29. The payment method of claim 28, wherein each said money module may abort prior to committing to said transfer by following an abort routine programmed in said money modules.

30. The payment method of claim 28, wherein said abort routine includes the money module executed steps of:

checking if said ready-to-commit message was sent;

where said ready-to-commit message was sent, recording information associated with said electronic representation of money received from said first money module, wherein said information associated with said electronic representation of money can be used for claiming lost electronic money.

31. The payment method according to claim 30, wherein said abort routine comprises the money module executed steps of:

sending a message to the other of said money modules indicating that said electronic money transfer cannot be completed; and

wherein said other of said money modules, in response to said message, rolls back its changes regarding said electronic money transfer and notes that said electronic money transfer is aborted.

32. The payment method according to claim 31, further comprising the step, where said other of said money modules is a transaction money module used by a second subscriber, of sending a message to said second subscriber that said electronic transfer is aborted.

33. The payment method according to claim 31, further comprising the step, where said other of said

- 65 -

money module is a teller money module associated with a bank, of informing said bank to reverse accounting transactions performed for said electronic transfer.

34. The payment method according to claim 30, further comprising the step of said first money module rolling-back changes and recording that said transaction is aborted.

35. The payment method according to claim 30, further comprising the step, where said money module is a transaction money module used by a subscriber and said ready-to-commit message was not sent, of sending a message to said subscriber that said electronic transfer is aborted.

36. The payment method according to claim 30, further comprising the step, where said money module is a transaction money module used by a subscriber and said ready-to-commit message was sent, of sending a message to said subscriber that said electronic transfer is aborted and that a possible money transfer error occurred.

37. The payment method according to claim 30, further comprising the step, where said money module is a teller money module associated with a bank and said ready-to-commit message was sent, of informing said bank to reverse accounting transactions performed for said electronic transfer.

38. A method for a first device to establish a session with a second device, said first and second device being an electronic module or a server in an electronic monetary system, the method comprising the steps of:

(a) said second device receiving a certificate of said first device;

- 66 -

(b) said second device verifying the validity of said certificate of said first device;

(c) said second device sending a message to said first device, said message including a portion encrypted with a public key of said first device, and a certificate of said second device, said portion including a first random number, second device time information, and a first verification message;

(d) said first device verifying the validity of said certificate of said second device, and determining whether said second device time information is within a predetermined range of first device time information;

(e) said first device sending to said second device a second message encrypted with a public key of said second device, said second message including a second random number generated by said first device, a second verification message generated by said first device, said verification message generated by said second device, and said first device time information;

(f) said first device forming a session key from a combination of said first random number and said second random number;

(g) said second device verifying said first verification message, forming said session key from said combination of said first random number and said second random number, and determining whether said first device time information is within a predetermined range of said second device time information;

(h) said second device sending to said first device an acknowledgement message encrypted with said session key, said acknowledgement message including said second verification message; and

(i) said first device decrypting said acknowledgement message and verifying said second verification message.



- 67 -

39. The method of claim 38 wherein, where said first device is connected to and electronic monetary system having a network server, step (a) includes the steps of said first device sending to said network server a message including said certificate of said first device encrypted with a symmetric key, and said network server decrypting said message and sending said certificate of said first device to said second device.

40. The method of claim 38, wherein each certificate includes a unique identifier which is unique to each device, further comprising the steps of said second device determining whether a unique identifier of said first device is contained in a first list stored in said second device, and said first device determining whether a unique identifier of said second device is contained in a second list stored in said first device, said first and second list being lists of said unique identifiers for bad devices.

41. The method according to claim 40, wherein each device is one of a plurality of types, each of said types associated with a unique range of a type variable, and wherein said unique identifier of a given device maps to a value of said type variable within said unique range assigned to said type of said given device according to a mapping mechanism securely stored in each said device, wherein step (b) includes the steps of mapping said unique identifier of said first device into a first device type variable and determining whether said first device type variable corresponds to an expected type of said first device, and wherein step (d) includes the steps of mapping said unique identifier of said second device into a second device type variable and determining whether said second device type variable corresponds to an expected type of said second device.

- 68 -

42. A method for transferring electronic notes of a predetermined total monetary value from a transferor money module to a transferee money module, said method comprising the steps of:

(a) said transferor money module selecting one or more electronic notes from which to provide said predetermined total monetary value;

(b) said transferor money module creating one or more transfer electronic notes by appending a respective transfer record and digital signature of said transferor money module to each said one or more electronic notes, where for each said one or more transfer electronic notes said respective transfer record indicates whether all or some portion of a monetary amount of said one or more electronic notes is being transferred;

(c) said transferor money module sending said one or more transfer electronic notes to said transferee money module;

(d) said transferee money module verifying the validity of said one or more transfer electronic notes;

(e) said transferee money module storing said one or more transfer electronic notes in a note directory; and

wherein said transferor and transferee money module store in a note log information including a note body and transfer records for each of said one or more electronic notes; and

wherein step (d) includes, for each transfer note of said one or more transfer notes, the steps of checking note bodies in said note directory and said note log for matches to said transfer note, and creating a note transfer tree for identified matches and checking for duplication.

43. The method of claim 42, wherein said

- 69 -

transfer record includes a sequence identification number, wherein for each one of said one or more electronic notes said sequence identification number distinguishes all transfer electronic notes generated therefrom.

5           44. The method of claim 42, wherein for each transfer electronic note of said one or more transfer electronic notes, step (d) includes the step of checking said transfer record and all other transfer records  
10           appended by other transferor money modules to confirm that for each transfer a monetary amount was transferred which is not greater than the monetary value transferred in an immediately precedent transfer.

15           45. The method of claim 42, wherein each transfer electronic note of said one or more transfer electronic notes includes digital signatures and certificates of each transferor money module over the history of said transfer electronic note; wherein step (d)  
20           further comprises the step of verifying the validity of each digital signature and certificate.

25           46. The method of claim 42, wherein each of said one or more transfer electronic notes includes an expiration date; and where said transferee money module is a transaction money module, step (d) further comprises the step of said transferee money module verifying each electronic note's expiration date.

30           47. The method of claim 42, wherein said electronic note is an electronic representation of currency having an expiration date and a monetary value; wherein step (a) includes the step of:

          (a) said transferor money module  
35           determining all possible alternatives for providing the predetermined total monetary value and using a minimum

- 70 -

number of electronic notes;

(b) determining which set of said all possible alternatives includes a least number of transfers; and

(c) where said set includes more than one element, selecting an element of said set which includes a minimum number of monetary-unit-days summed over all notes of the element, wherein monetary-unit-days represents a product of number of days until the electronic note's expiration date and the electronic note's residual monetary value.

48. The method according to claim 42, wherein step (d) includes said transferee money module verifying that said predetermined monetary value transferred corresponds to an expected value.

49. A method for transferring electronic notes of a predetermined total monetary value from a transferor money module to a transferee money module, said method comprising the steps of:

(a) said transferor money module selecting one or more electronic notes from which to provide said predetermined total monetary value;

(b) said transferor money module creating one or more transfer electronic notes by appending a respective transfer record and digital signature of said transferor money module to each said one or more electronic notes, where for each said one or more transfer electronic notes said respective transfer record indicates whether all or some portion of a monetary amount of said one or more electronic notes is being transferred;

(c) said transferor money module sending said one or more transfer electronic notes to said transferee money module;

(d) said transferee money module verifying

- 71 -

the validity of said one or more transfer electronic notes;

(e) said transferee money module storing said one or more transfer electronic notes in a note directory;

wherein each transfer electronic note of said one or more transfer electronic notes includes digital signatures and certificates of each transferor money module over the history of said transfer electronic note, each of said certificates includes a unique identifier identifying the associated transferor money module, and wherein said transfer record includes said unique identifier of the transferee electronic module; and

wherein step (d) further comprises the step of checking that said unique identifier of said transfer record corresponds to said unique identifier in said certificate for each successive transfer over said history of said electronic note.

50. A method for transferring electronic notes of a predetermined total monetary value from a transferor money module to a transferee money module, said method comprising the steps of:

(a) said transferor money module selecting one or more electronic notes from which to provide said predetermined total monetary value;

(b) said transferor money module creating one or more transfer electronic notes by appending a respective transfer record and digital signature of said transferor money module to each said one or more electronic notes, where for each said one or more transfer electronic notes said respective transfer record indicates whether all or some portion of a monetary amount of said one or more electronic notes is being transferred;

(c) said transferor money module sending said one or more transfer electronic notes to said

- 72 -

transferee money module;

(d) said transferee money module verifying the validity of said one or more transfer electronic notes;

(e) said transferee money module storing said one or more transfer electronic notes in a note directory;

wherein each transfer electronic note of said one or more transfer electronic notes includes a unique identifiers for each transferee money module over the history of said transfer electronic note; and

wherein, where said transferee money module is a transaction money module, step (d) further comprises the step of checking whether each said unique identifier is on a list of unique identifiers for bad money modules that is stored in said transferee money module.

51. A method for a first subscriber to exchange an electronic representation of a first foreign currency stored in a first transaction module for an electronic representation of a second foreign currency stored in a second transaction module, comprising the steps of:

- (a) establishing a cryptographically secure session between said first transaction module and said second transaction module;
- (b) said subscriber selecting, by way of said first transaction module, a first amount of said first foreign currency to be sold;
- (c) checking if said first transaction module has sufficient funds;
- (d) said first transaction module sending said first amount to said second transaction module, via said cryptographically secure session;

- 73 -

- °
- 5
- 10
- 15
- 20
- 25
- 30
- 35
- (e) said second transaction module prompting its owner to select an exchange rate or a second amount of said second currency;
  - (f) checking if said second transaction module has sufficient funds;
  - (g) said second transaction module sending a message indicative of said second amount or said exchange rate to said first transaction module, via said cryptographically secure session;
  - (h) said first subscriber confirming said second amount or said exchange rate;
  - (i) said first transaction module sending said electronic representation of first foreign currency to said second transaction module, in said first amount, via said cryptographically secure session;
  - (j) said second transaction module sending said electronic representation of said second foreign currency to said first transaction module, in said second amount, via said cryptographically secure session; and
  - (k) committing said first transaction module to transferring said first foreign currency to said second transaction module and said second transaction module to receiving said first foreign currency from said first transaction module, and committing said second transaction module to transferring said second foreign currency to said first transaction module and said first transaction

- 74 -

module to receiving said second foreign currency from said second transaction module, in an order which is not predictable.

5           52. The method according to claim 51, wherein step (k) comprises the steps of:

          (a) said first transaction module and said second transaction module sharing a common random binary value, having either a first value or a second value;

10           (b) said first transaction module conditionally logging either said transferring of said first foreign currency to said second transaction module or said receiving of said second foreign currency from said second transaction module, where said common random  
15           binary value has said first value or said second value, respectively, such that rolling back may occur;

          (c) said first transaction money module sending a message to said second transaction module indicating that said first transaction module has  
20           completed conditionally logging a transfer;

          (d) said second transaction module, in response to said message, conditionally logging either said receiving of said first foreign currency from said first transaction module or said transferring of said  
25           second foreign currency to said first transaction module, where said common random binary value equals said first value or said second value, respectively, such that rolling back may occur;

          (e) said second transaction money module, where said common random number value equals the first value, sending a start-commit message to said first transaction module;

30           (f) said first transaction module, in response to said start-commit message, setting said  
35           conditionally logging to unconditional logging, and



- 75 -

° initiating a commit protocol wherein said first transaction module commits to its outstanding transfer so that said first transaction module can no longer abort said transfer by rolling-back its state, and wherein said second money module commits to said transferring second  
5 foreign currency and to said receiving first foreign currency by logging said transferring and receiving so that said second money module can no longer abort said exchange of foreign currency by rolling-back its state; and

10 (g) said second transaction module, where said common random number value equals the second value, setting said conditionally logging to unconditional logging and initiating a commit protocol wherein said second transaction module commits to its outstanding  
15 transfer so that said second transaction module can no longer abort said transfer by rolling-back its state, and wherein said first money module commits to said transferring first foreign currency and receiving second foreign currency so that said first money module can no  
20 longer abort said exchange of foreign currency by rolling-back its state.

25 53. The method according to claim 52, wherein said common random number is generated as a session key during said step of establishing a cryptographically secure session.

30 54. The method according to claim 51, wherein said commit protocol initiated by a given money module for any outstanding money transfer with respect to another money module, comprises the steps of:

35 said given module sending a ready-to-commit message to said another money module;  
said another money module sending an acknowledgement to said given money module in

- 76 -

response to said ready-to-commit message;  
said given money module committing by  
logging said any outstanding money transfer so  
that said given money module can no longer abort  
said any outstanding money transfer by rolling-  
back its state; and

said another money module committing by  
logging said any outstanding money transfer so  
that said another money module can no longer  
abort said any outstanding money transfer by  
rolling-back its state.

55. The method according to claim 51, wherein  
in step (b) said subscriber selects said first amount of  
said first foreign currency to be sold by type of note.

56. A system for transferring electronic notes  
between processor-based electronic modules, each  
processor-based electronic module being one of a plurality  
of module types, said system comprising:

processor-based electronic modules, each  
processor-based electronic module storing a unique module  
identifier, and each capable of creating a  
cryptographically secure channel and transferring and  
receiving electronic notes via said cryptographically  
secure channel, and where each said electronic module has  
a memory for storing said electronic notes;

wherein each of said plurality of module  
types is associated with a unique range of a module type  
variable, and wherein each said unique module identifier  
maps to a value of said type variable within said unique  
range assigned to said module type according to a mapping  
mechanism securely stored in each said electronic module.

57. The system according to claim 56, wherein  
each said unique identifier is a unique integer value less

- 77 -

than a predetermined prime number, and wherein said value of said type variable is generated according to raising a primitive root of said prime number to a power of said unique identifier under modulo arithmetic over said predetermined prime number, and wherein each of said plurality of electronic modules, said primary security server, and each of said plurality of secondary security servers securely stores said primitive root and said prime number.

58. A method for a subscriber using a transaction module to update a credit note for said subscriber's bank account at an issuing bank having a teller module, a money generator module, and an on-line accounting system, said method comprising the steps of:

- (a) said subscriber selecting, by way of said transaction module, said bank account from which to update said credit note and a requested credit amount indicative of a requested total credit amount for said credit note;
- (b) said transaction module establishing a first cryptographically secure session with said teller module;
- (c) said transaction module sending a credit request message to said teller module via said first cryptographically secure session, where said credit request message includes a credit update amount corresponding to a net credit amount for said credit note and bank account information corresponding to said bank account;
- (d) checking said bank account information to verify its validity;

- 78 -

- 0
- 5
- 10
- 15
- 20
- 25
- 30
- 35
- (e) checking a credit line associated with said subscriber's bank account for sufficient funds to provide said requested credit amount;
  - (f) where a current credit note for said subscriber's bank account exists, said transaction module sending said current credit note to said teller module;
  - (g) said teller module establishing a second cryptographically secure session with said money generator module;
  - (h) updating said credit line associated with said subscriber's bank account according to said requested total credit amount for said credit note;
  - (i) said teller module sending a create note request to said money generator module, via said second cryptographically secure session, where said create note request includes a requested credit note value;
  - (j) said money generator module generating a credit note of said requested credit note value;
  - (k) transferring said credit note to said teller module, via said second cryptographically secure session;
  - (l) transferring said credit note to said transaction module, via said first cryptographically secure session;
  - (m) committing said transaction module and said teller module session; and
  - (n) said teller module committing with

- 79 -

said money generator module.

59. The credit update method of claim 58 wherein, where said current credit note exists, in step (c) said net credit amount for said credit note represents a difference between said requested total credit amount and a current credit amount of said current credit note.

60. The credit update method of claim 58, wherein said bank account information comprises an account profile having a bank account number that is digitally signed by a customer service module; where said step of checking the validity of said bank account information includes the step of checking said digital signature on said account profile with a public key of said customer service module.

61. The credit update method of claim 58, wherein:

step (f) further includes the step of said transaction module sending to said teller module any currency notes and any transferred credit notes stored in said transaction module;

step (f) is followed by the step of said teller module updating said on-line accounting system according to said currency notes and transferred credit notes;

in step (i), said create note request includes a requested currency note value corresponding to the total value of said currency notes and said transferred credit notes stored in said transaction module;

crediting a money issued account in said on-line accounting system by said requested currency note value;

step (j) includes the step of said money

- 80 -

generator module generating a currency note of said requested currency note value;

step (k) includes the step of transferring said currency note to said teller module, via said second cryptographically secure session; and

step (l) includes the step of transferring said currency note to said transaction module, via said first cryptographically secure session.

62. A method for a subscriber, by way of a customer service module associated with a host having access to one or more banks, to link a transaction money module to said subscriber's bank account at a bank having a teller module, a money generator module, and an on-line accounting system, comprising the steps of:

- (a) said host of said customer service module accessing bank account information of said subscriber from said one or more banks in response to receiving identification information of said subscriber;
- (b) verifying said bank account information, and said subscriber identifying said subscriber's bank account for linking to said transaction money module;
- (c) establishing a session between said transaction money module and said customer service module;
- (d) said customer service module generating an account profile for said subscriber's bank account;
- (e) said customer service module sending a message to said transaction money module, said message including said

- 81 -

account profile and a digital signature of said account profile signed by a private key of said customer service module;

- (f) said transaction money module verifying said digital signature;
- (g) said transaction money module appending a certificate of said customer service module to said account profile;
- (h) said transaction money module storing said account profile; and
- (i) committing said transaction money module and said customer service module session.

63. The method according to claim 62, wherein step (f) further includes the step of said subscriber verifying said account profile.

64. The method according to claim 62, wherein step (h) includes the step of said transaction money module replacing an existing second account profile for said bank account with said account profile.

65. A method for a subscriber, by way of a customer service module having access to one or more banks, to revalidate a link of a transaction money module to said subscriber's bank accounts at a bank having a teller module, a money generator module, and an on-line accounting system, comprising the steps of:

- (a) said subscriber selecting, by way of said transaction money module, said bank for which to revalidate said link;
- (b) said transaction money module

- 82 -

- establishing a cryptographically secure session with said customer service module;
- 5 (c) said transaction money module sending to said customer service module an account profile for said bank accounts that is stored in said transaction money module;
- 10 (d) said customer service module verifying the validity of said account profile;
- (e) said customer service module checking with said bank whether said subscriber's bank accounts contained in said account profile are active;
- 15 (f) said customer service module generating an account profile for said subscriber's bank account;
- (g) said customer service module sending a message to said transaction money module, said message including said account profile and a digital signature of said account profile signed by a private key of said customer service module;
- 20 (h) said transaction money module verifying said digital signature;
- 25 (i) said transaction money module appending a certificate of said customer service module to said account profile; and
- 30 (j) committing said transaction money module and said customer service module session.

66. The method of claim 65, wherein said  
35 account profile includes a particular customer service



- 83 -

°  
module digital signature and a certificate of said  
particular customer service module, where said step (d) of  
verifying the validity of said account profile includes  
the step of checking said particular customer module  
digital signature and validating said certificate of said  
5 particular customer service module.

67. An electronic monetary system comprising:  
an issuing bank having an on-line  
accounting system;  
10 a money issued reconciliation system;  
electronic representations of money that  
are accounted for in said on-line accounting system;  
a money generator module associated with  
said issuing bank, for generating said electronic  
15 representations of money;  
a teller module associated with said  
issuing bank, capable of storing said electronic  
representations of money;  
a transaction money module capable of  
20 transferring said electronic representations of money;  
where a transfer record is appended to said  
electronic representations of money upon each transfer  
between any two of said modules, and where said electronic  
notes are periodically passed to said money issued  
25 reconciliation system;  
said money issued reconciliation system  
having a processor for analyzing said transfer records for  
each note to identify electronic representations of money  
that are lost or duplicated; and  
30 where a subscriber of a given transaction  
money module submits a lost money claim identifying lost  
electronic representations of money to said issuing bank,  
and said issuing bank remunerates said subscriber based on  
said lost money claim and on said money issued  
35 reconciliation system confirming the validity of said lost

- 84 -

money claim for each said lost electronic representations of money.

68. The electronic monetary system according to claim 67, wherein said transaction money modules are each adapted to store information associated with electronic representations of money that are involved in aborted transactions, and wherein said lost money claim includes said information.

69. The electronic monetary system according to claim 67, wherein said transaction money modules are each adapted to store said lost money claim on an independent storage device, and wherein said lost money claim is digitally signed by a private key of said transaction money modules.

70. The electronic monetary system according to claim 69, wherein said lost money claim includes information associated with all electronic representations of money that are stored in said transaction money module.

71. A method for a subscriber to create a lost notes claim that identifies lost electronic notes associated with a subscriber's transaction money module, said method comprising the steps of:

- (a) said subscriber selecting, by way of said transaction money module, to create a lost notes claim;
- (b) said transaction money module generating a unique claim sequence number and constructing said lost notes claim as a packet including said unique claim sequence number, information for all transferable electronic notes stored in said

- 85 -

transaction money module, failed  
commit information for any electronic  
notes associated with failed commits  
by said transaction money module, and  
a digital signature and certificate of  
said transaction money module; and  
(c) storing said lost notes claim on a  
storage medium which is independent of  
said transaction money module.

72. The system according to claim 71, wherein  
said lost notes claim comprises:  
a first and second data field encrypted  
with said transaction money module's private key, wherein  
said first data field includes said unique claim sequence  
number, said information for all transferable electronic  
notes stored in said transaction money module including a  
current value and a copy of each said transferable  
electronic notes, and said failed commit information for  
unclaimed failed commits, and wherein said second data  
field includes said first data field digitally signed said  
transaction money module's private key; and  
a third data field including said claim  
sequence number, a total monetary value amount for said  
lost notes claim, and said certificate of said transaction  
money module.

73. A method for a subscriber, by way of a  
customer service module having access to one or more  
issuing banks, to claim lost notes associated with a  
transaction money module by using said transaction money  
module, comprising the steps of:  
(a) said subscriber providing  
identification to a host of said  
customer service module;  
(b) establishing a cryptographically

- 86 -

- secure session between said transaction money module and said customer service module;
- 5 (c) said customer service module receiving from said host said identification information of said subscriber;
- (d) said transaction money module sending said customer service module a message including unclaimed failed commit information associated with unclaimed failed commit records stored in said transaction money module; and
- 10 (e) said customer service module constructing a claim from said unclaimed failed commit information, and sending said claim via said host to a money issued investigation system associated with said one or more issuing banks.
- 15

20 74. The method to claim lost notes according to claim 73, further comprising the step of said customer service module, in response to said message, sending a claim identifier to said transaction money module, and said transaction money module marking each of said

25 unclaimed failed commit records with said claim identifier.

30 75. The method to claim lost notes according to claim 73, wherein said unclaimed failed information sent to said customer service module in step (d) is associated with only unclaimed failed records that have not been previously claimed.

35 76. The method to claim lost notes according to claim 73, wherein prior to step (d) said subscriber

- 87 -

selects, by way of said transaction money module, said failed commit records from among a list of failed commit records.

77. A method for a subscriber, by way of a customer service module having access to one or more issuing banks, to claim lost notes associated with a transaction money module by using a storage device that contains a lost notes claim stored from said transaction money module, said storage device being independent of said transaction money module, said method comprising the steps of:

- (a) said subscriber providing identification to a host of said customer service module;
- (b) said customer service module accessing said lost notes claim stored in said storage device;
- (c) said customer service module receiving said lost notes claim from said storage device;
- (d) said customer service module verifying the validity of said lost notes claim; and
- (e) said customer service module constructing a claim from said unclaimed failed commit information, and sending said claim via said host to a money issued investigation system associated with said one or more issuing banks.

78. The method to claim lost notes according to claim 77, wherein said lost notes claim includes a certificate of said transaction money module, and wherein said step (d) of said customer service module verifying

- 88 -

the validity of said lost notes claim includes verifying the validity of said certificate.

79. The method to claim lost notes according to claim 77, wherein said lost note claim includes copies of lost notes, each lost note copy of said copies of lost notes having a certificate group of data fields, which includes a list of each transferor money module that transferred an original of said lost note copy and containing each said transferor money module's digital signature and certificate, wherein step (d) further comprises the step of verifying the validity of each transferor money module's certificate and digital signature.

80. The method to claim lost notes according to claim 77, wherein said lost note claim includes copies of lost notes, each lost note copy of said copies of lost notes having a transfer record data field, which includes a list of each monetary value amount transferred in each transfer of an original of said lost note copy, wherein step (d) further comprises the step of checking said transfer record data field to confirm that for each transfer a monetary amount was transferred which is not greater than the monetary value transferred in an immediately precedent transfer.

81. The method to claim lost notes according to claim 77, wherein in step (b) a communication link is established between said customer service module and a host device associated with said storage device, said customer service module accessing said lost notes claim via said communication link.

82. An electronic module based monetary transaction system, comprising:

- 89 -

°  
a plurality of security servers;  
a plurality of tamper-proof electronic  
modules each having a unique module certificate that is  
digitally signed by one of said security servers, a memory  
that stores electronic representations of money, and a  
5 processor adapted to provide a cryptographically secure  
channel for transferring and receiving said electronic  
representations of money; and

wherein said module certificate is  
validated upon said electronic module interacting with  
10 other of said electronic modules or with said security  
servers; and

wherein said plurality of security servers  
selectively command global recertification for said module  
certificates, requiring any electronic module that  
15 interacts with one of said security servers to recertify  
said module certificate.

20

25

30

35

1/54

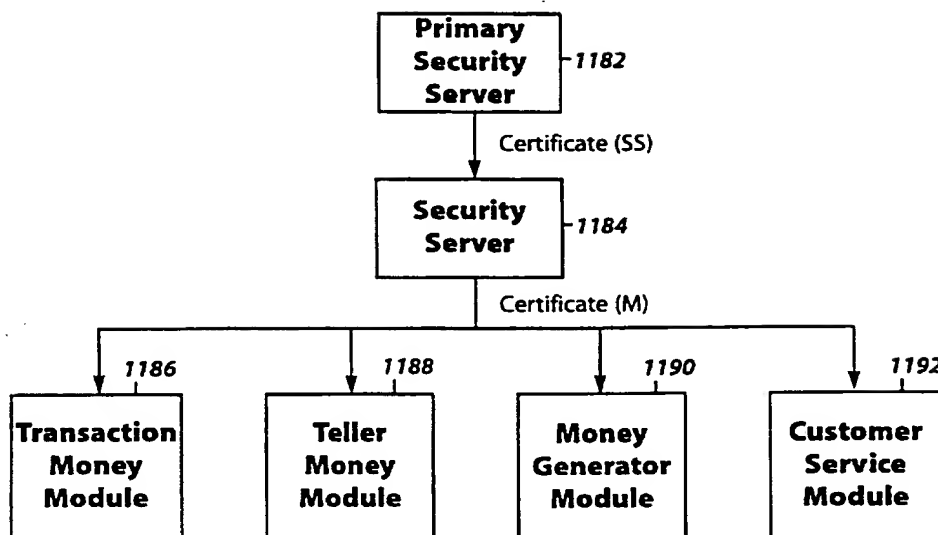


Figure 1A

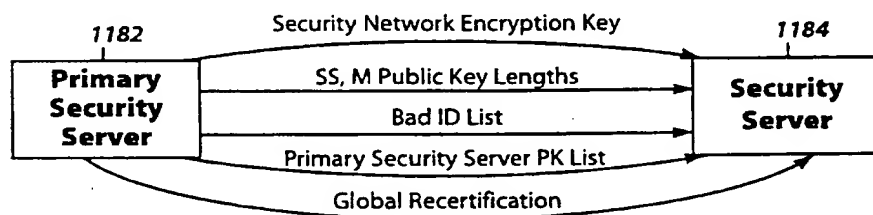


Figure 1B



2/54

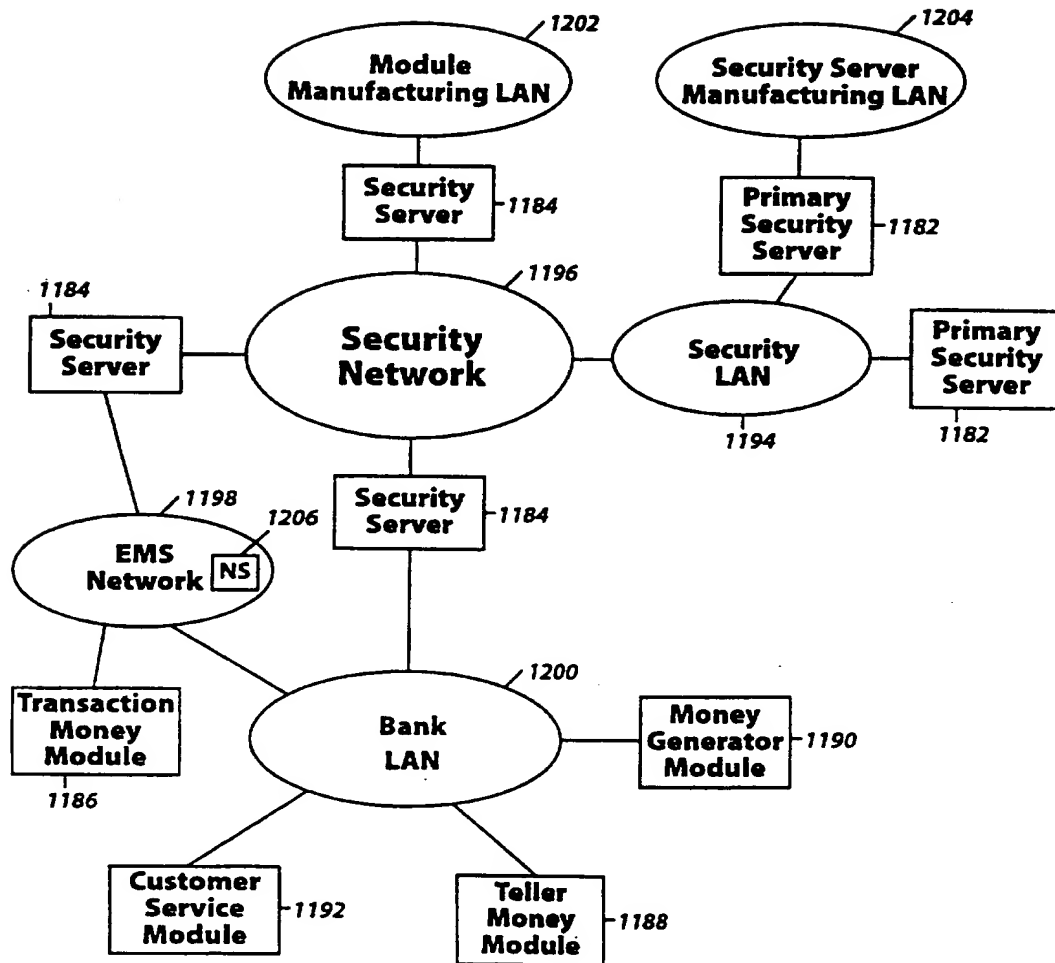


Figure 2

SUBSTITUTE SHEET (RULE 26)

3/54

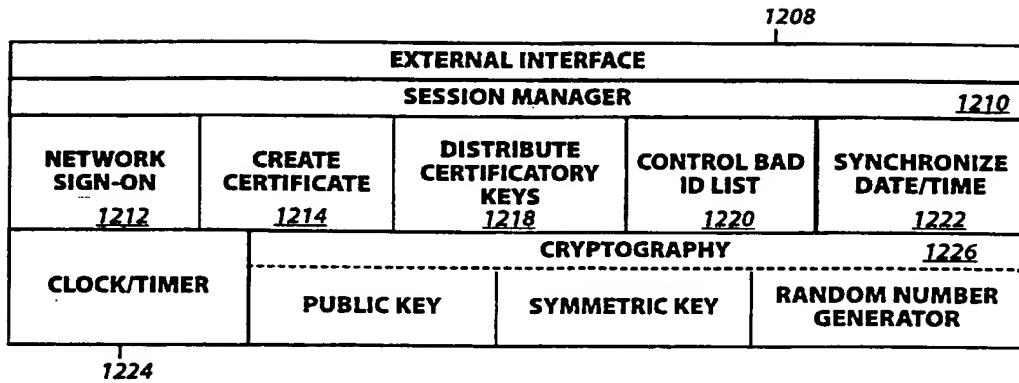


Figure 3A

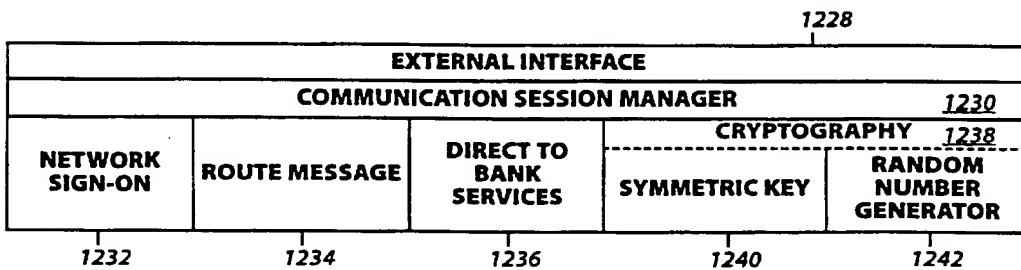


Figure 3B

**SUBSTITUTE SHEET (RULE 26)**

4/54

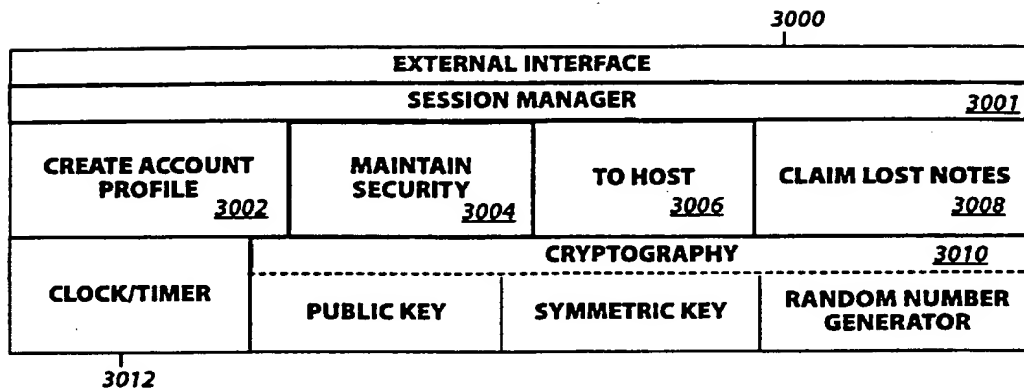


Figure 4A

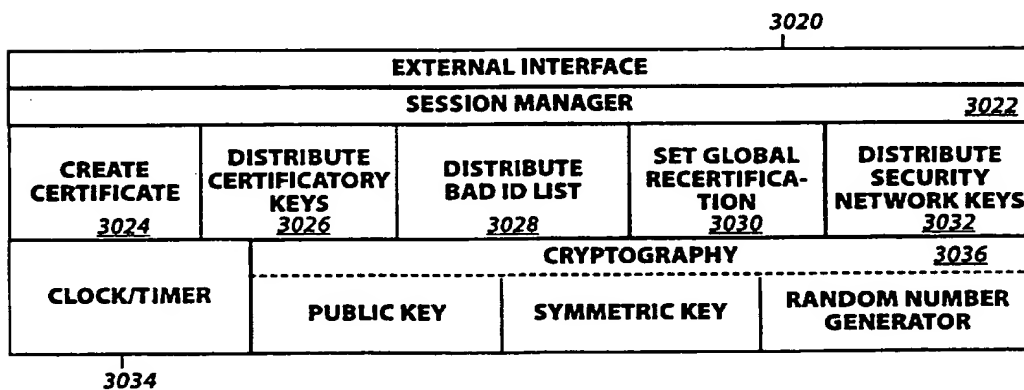


Figure 4B

**SUBSTITUTE SHEET (RULE 26)**

5/54

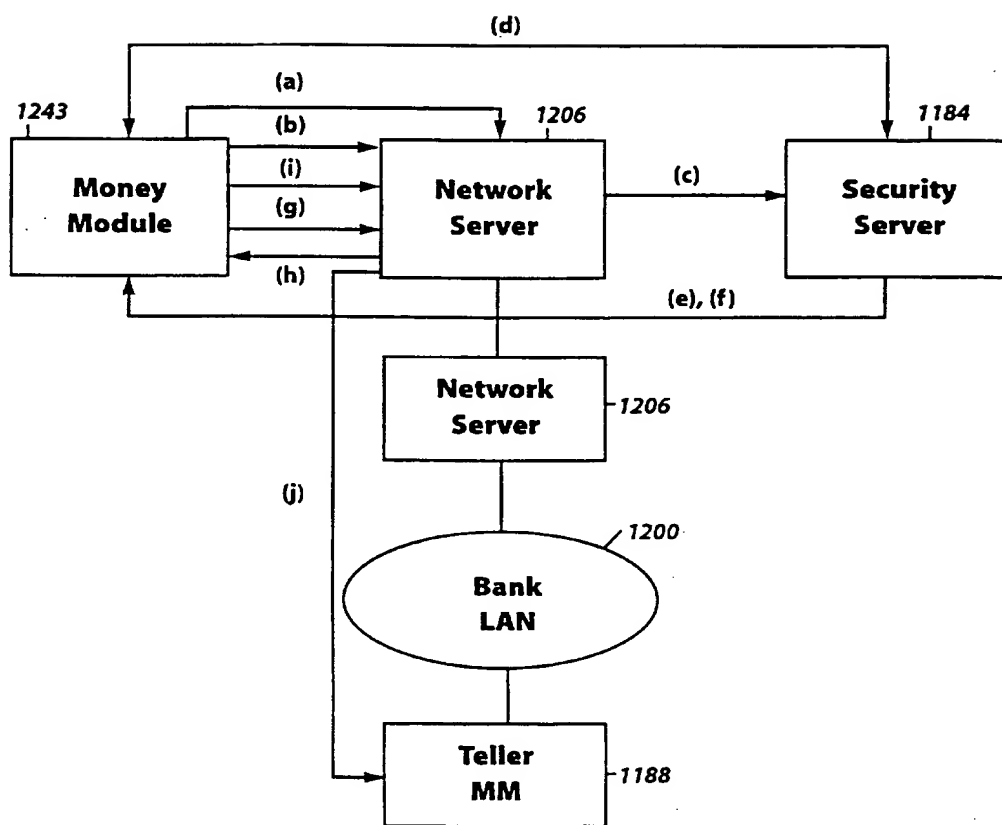


Figure 5

SUBSTITUTE SHEET (RULE 26)

6/54

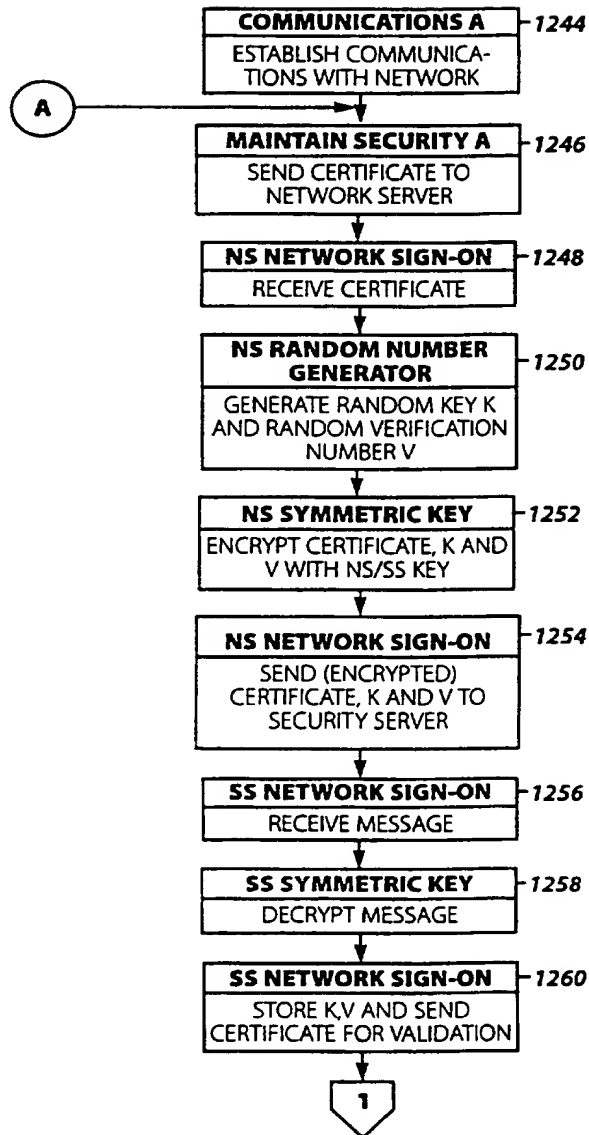


Figure 6A

SUBSTITUTE SHEET (RULE 26)

7/54

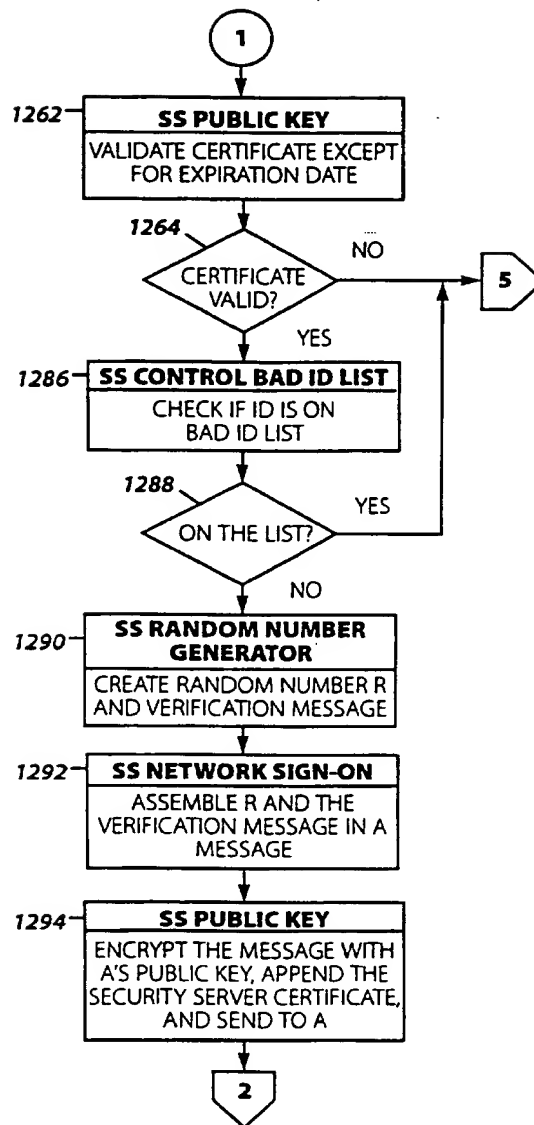


Figure 6B

SUBSTITUTE SHEET (RULE 26)

8/54

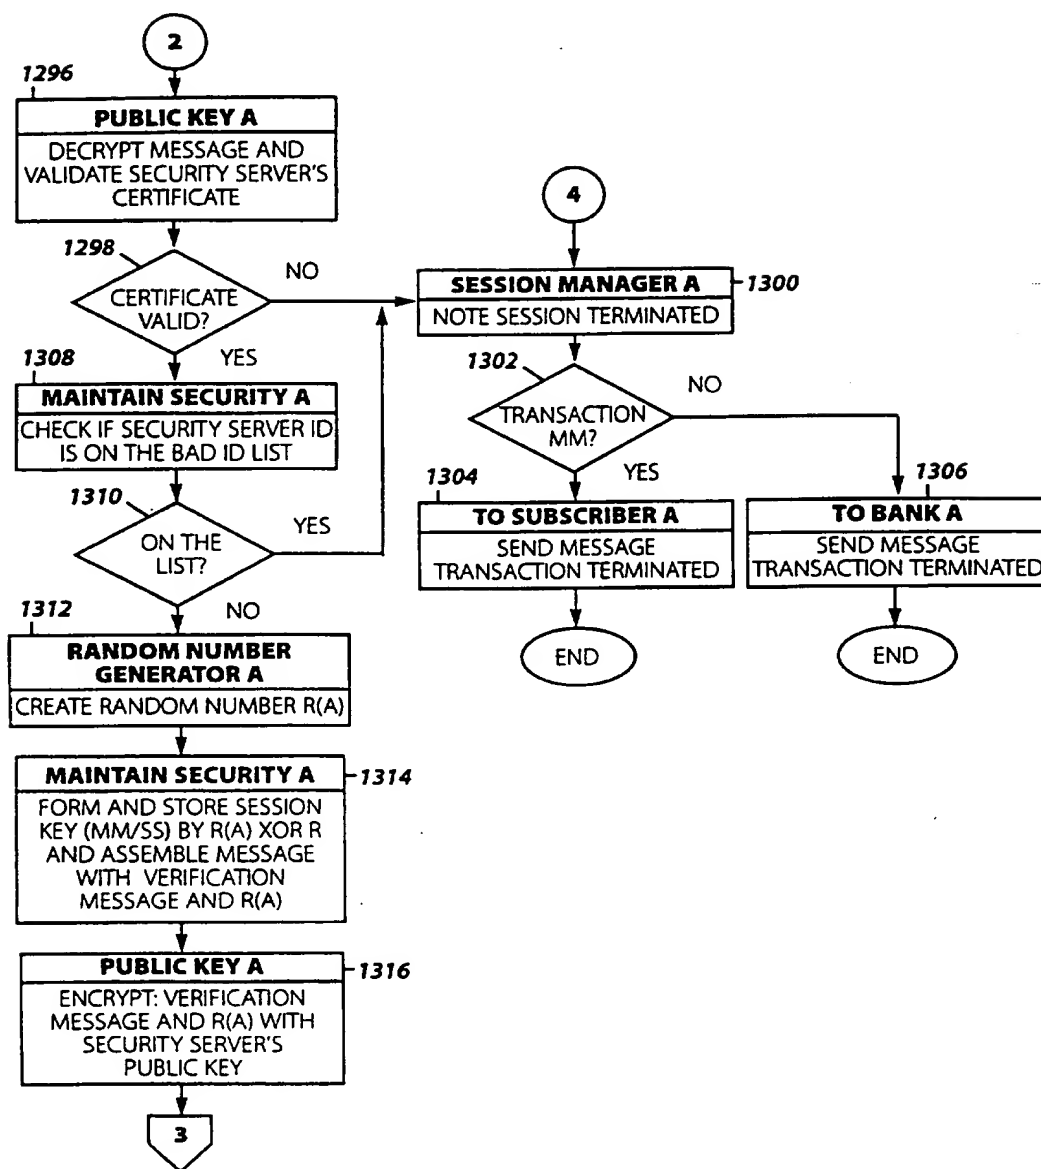


Figure 6C

SUBSTITUTE SHEET (RULE 26)

9/54

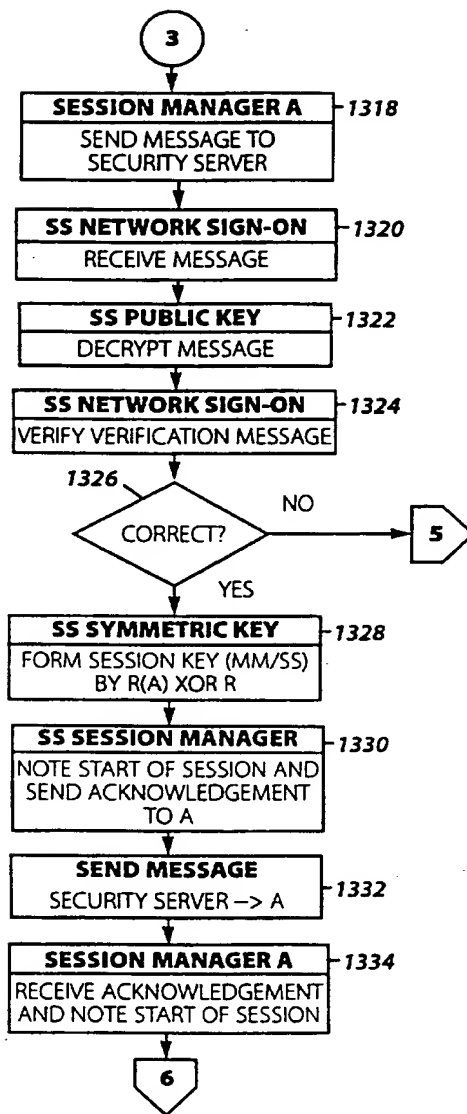


Figure 6D

SUBSTITUTE SHEET (RULE 26)



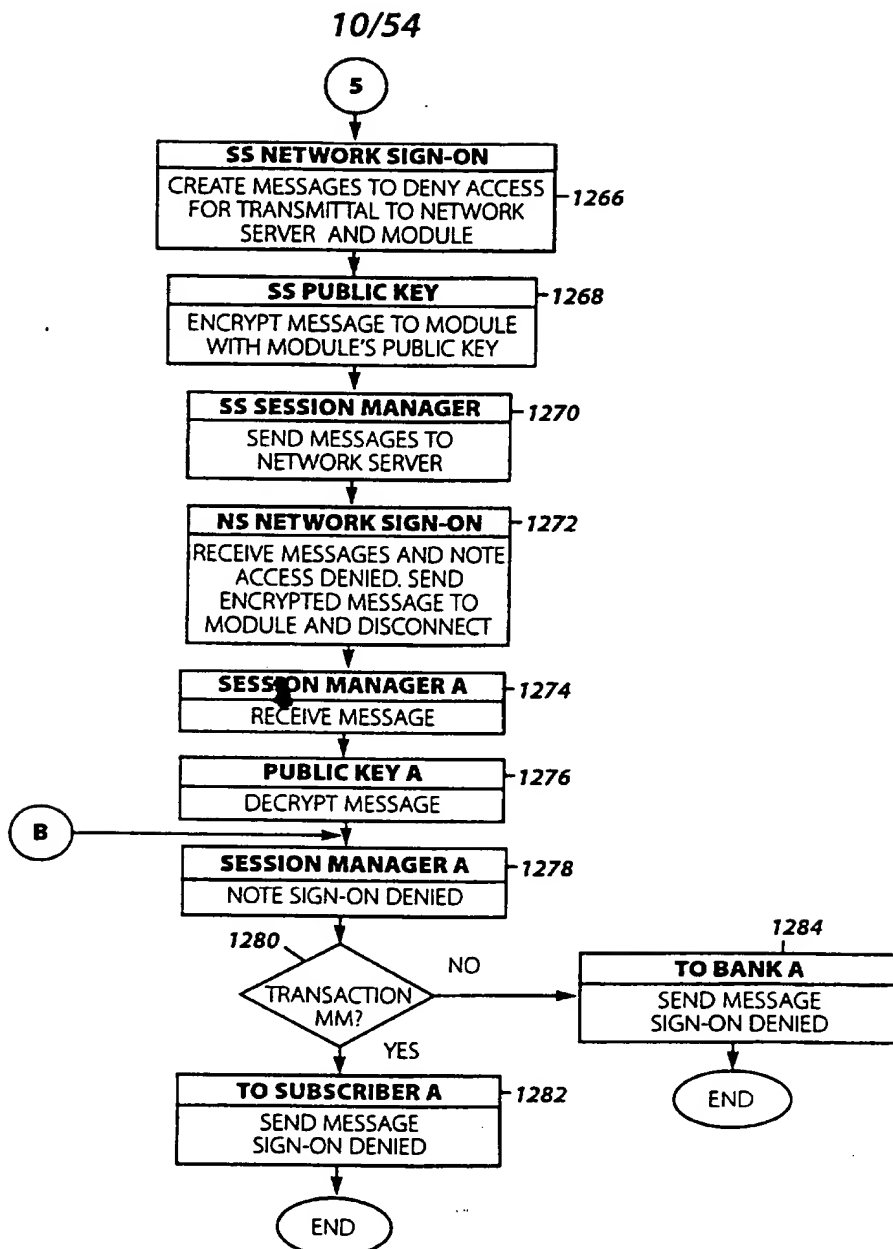


Figure 6E

11/54

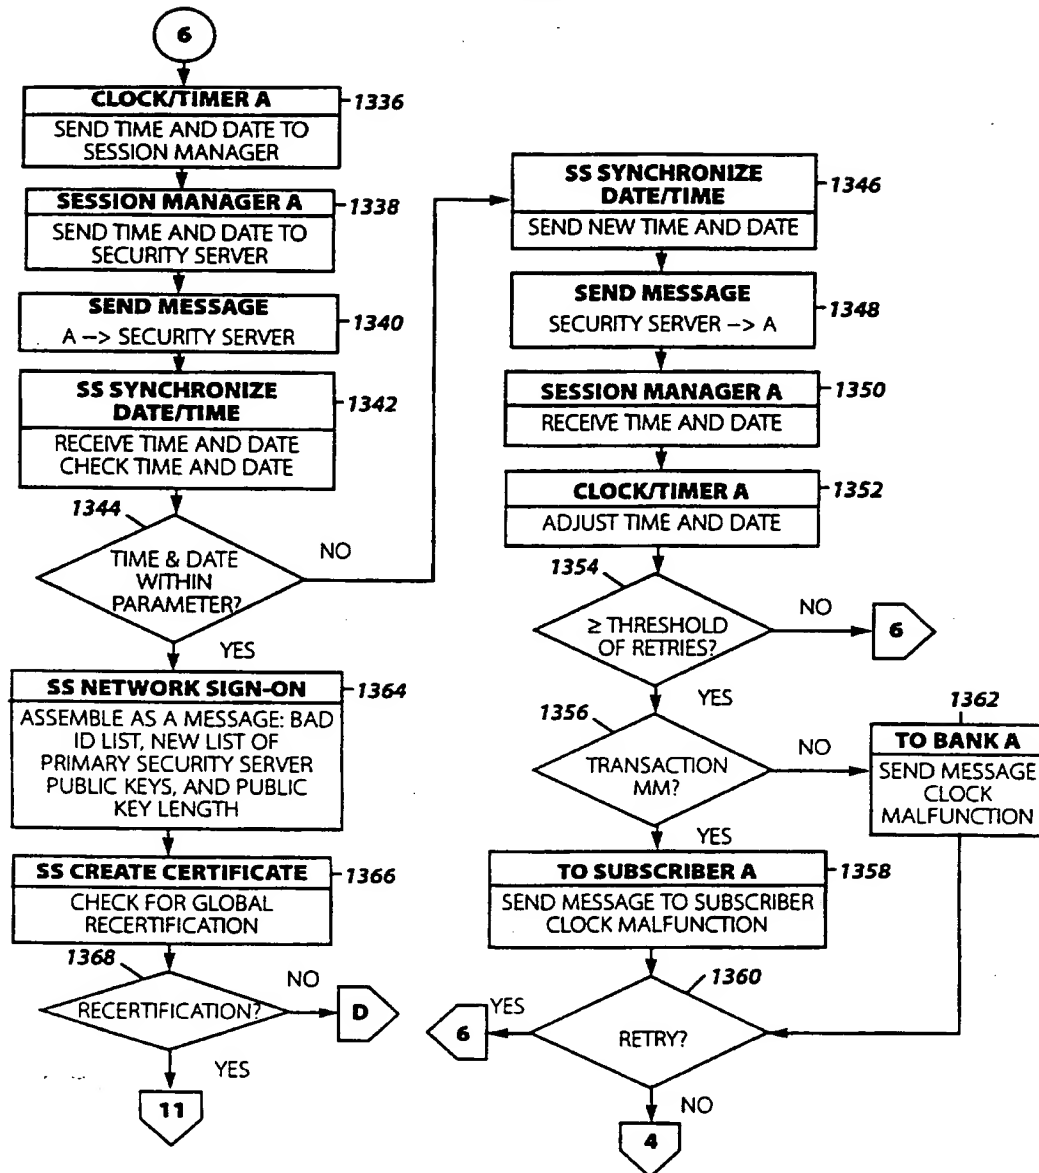


Figure 6F

SUBSTITUTE SHEET (RULE 26)

12/54


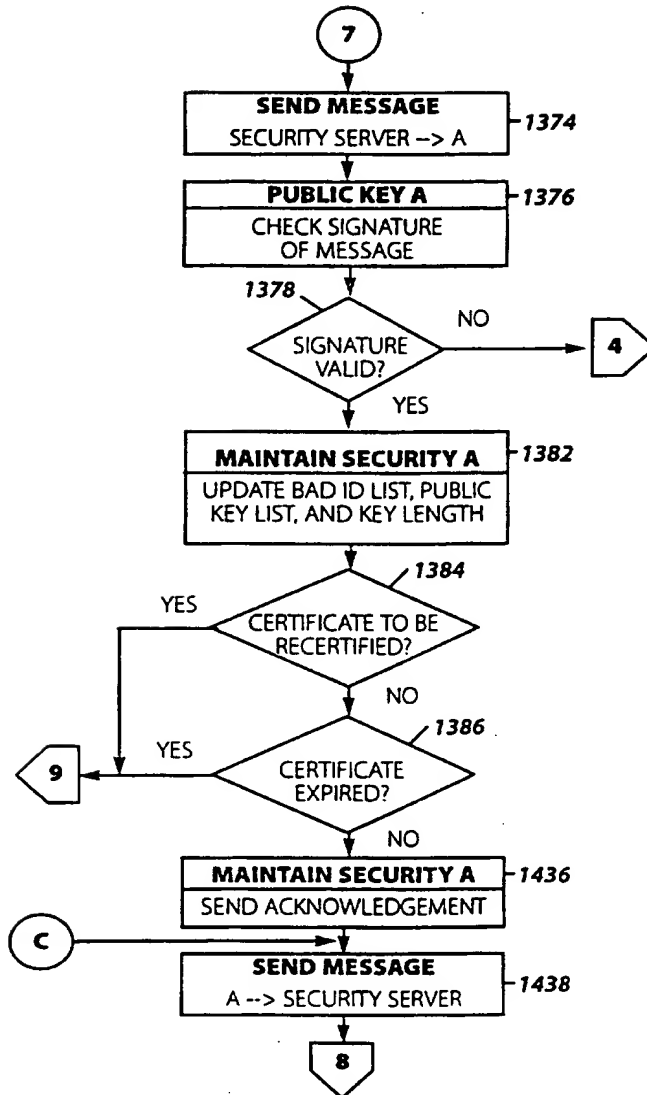


Figure 6G

SUBSTITUTE SHEET (RULE 26)

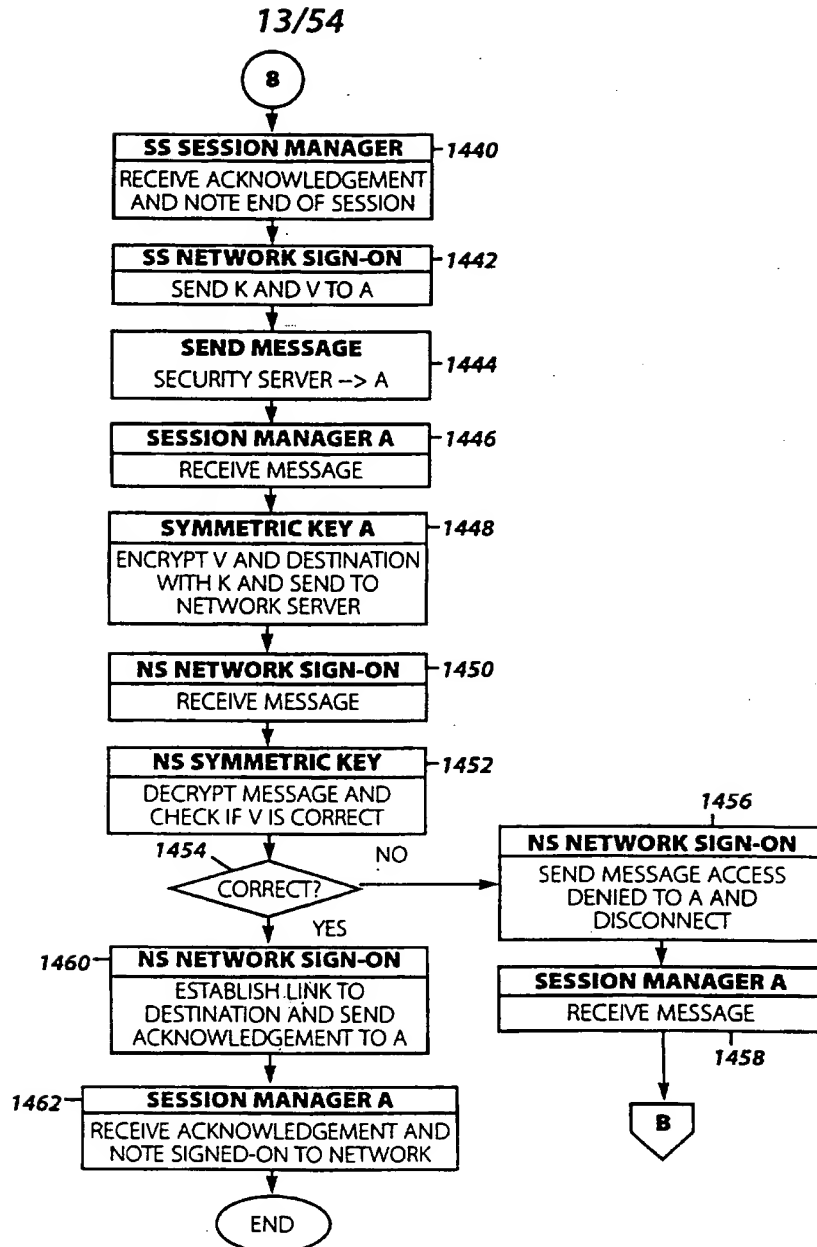

14/54

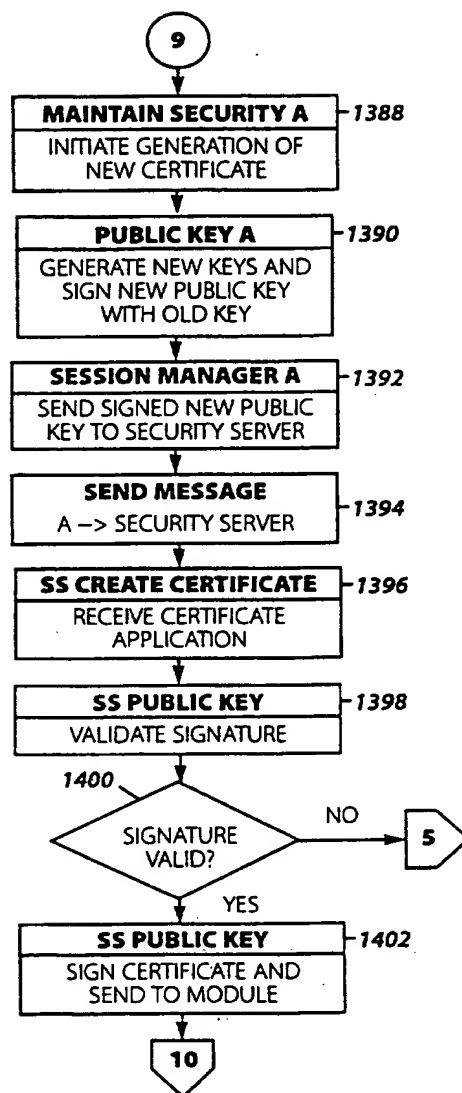


Figure 6I

SUBSTITUTE SHEET (RULE 26)

15/54

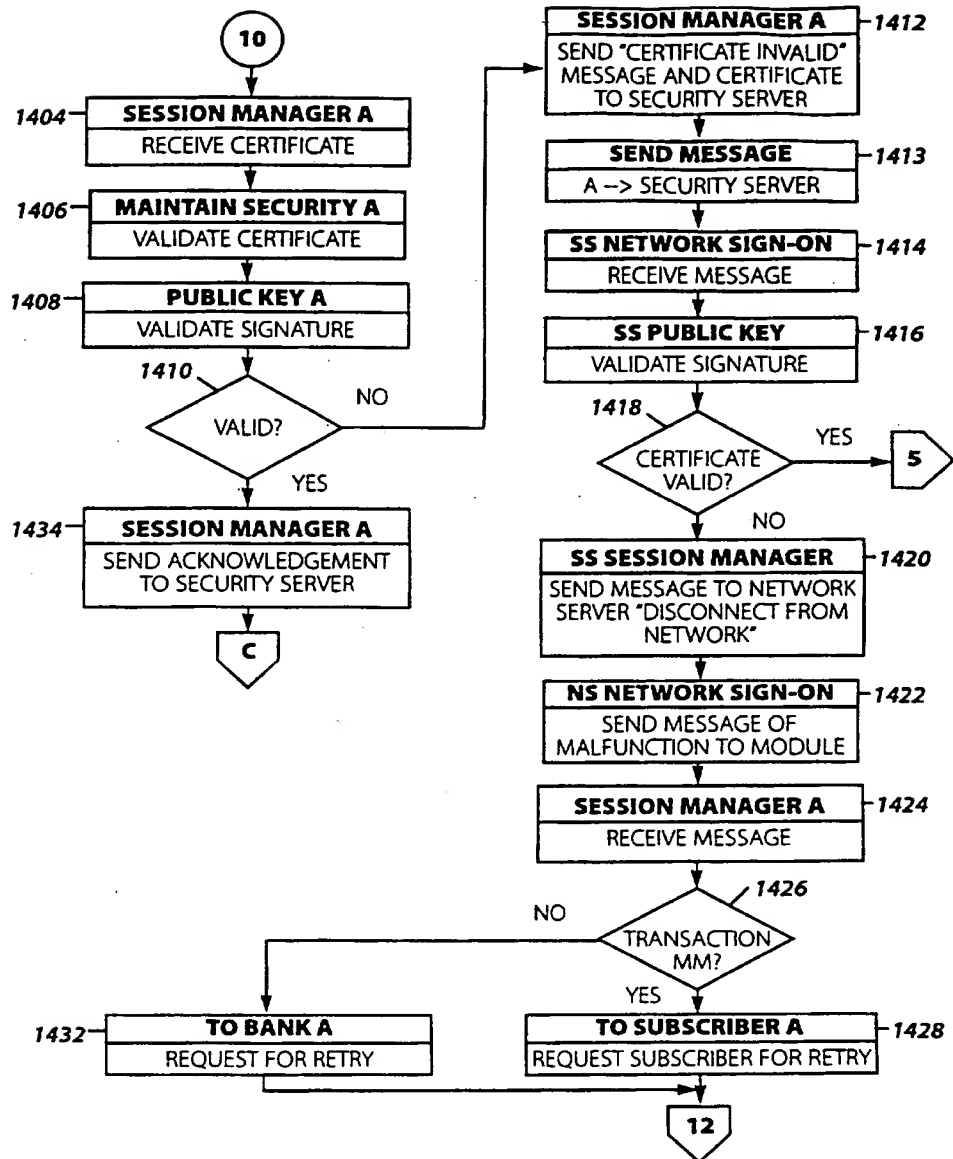


Figure 6J

SUBSTITUTE SHEET (RULE 26)

16/54

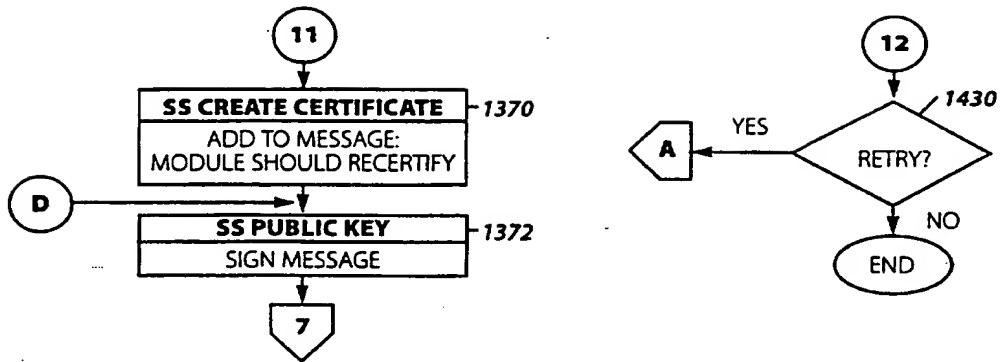


Figure 6K

SUBSTITUTE SHEET (RULE 26)

17/54

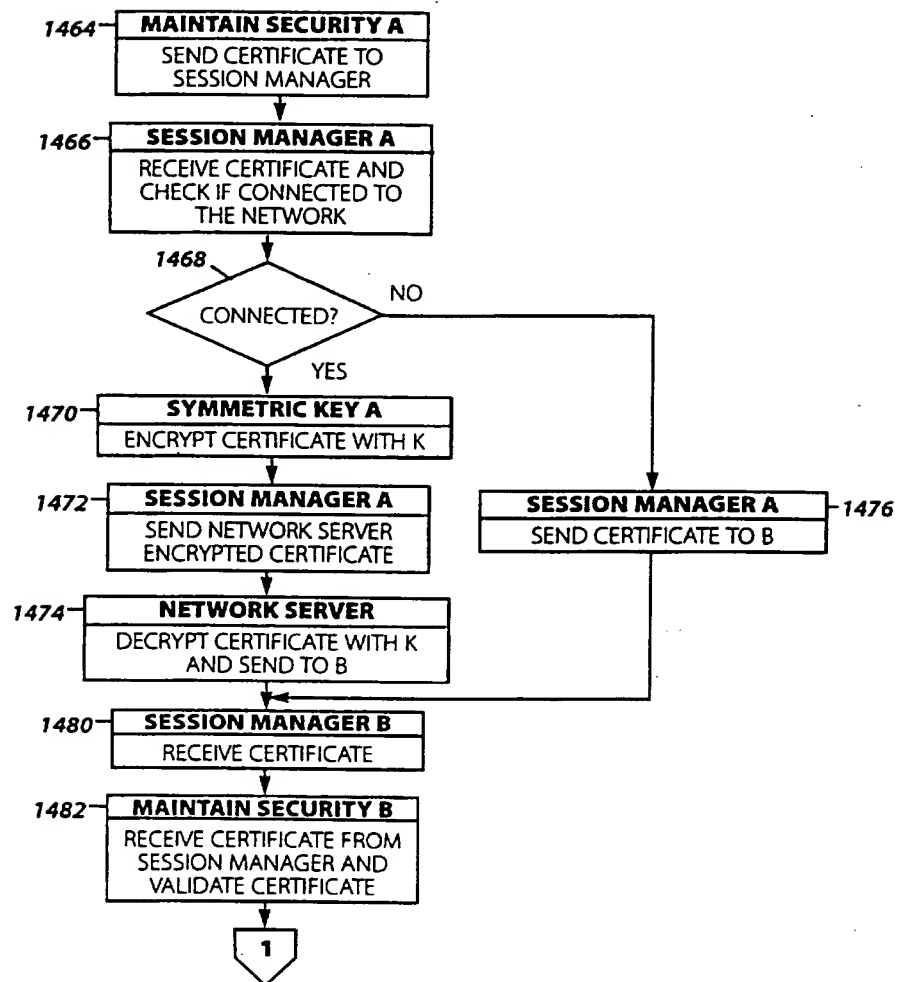


Figure 7A

SUBSTITUTE SHEET (RULE 26)



18/54

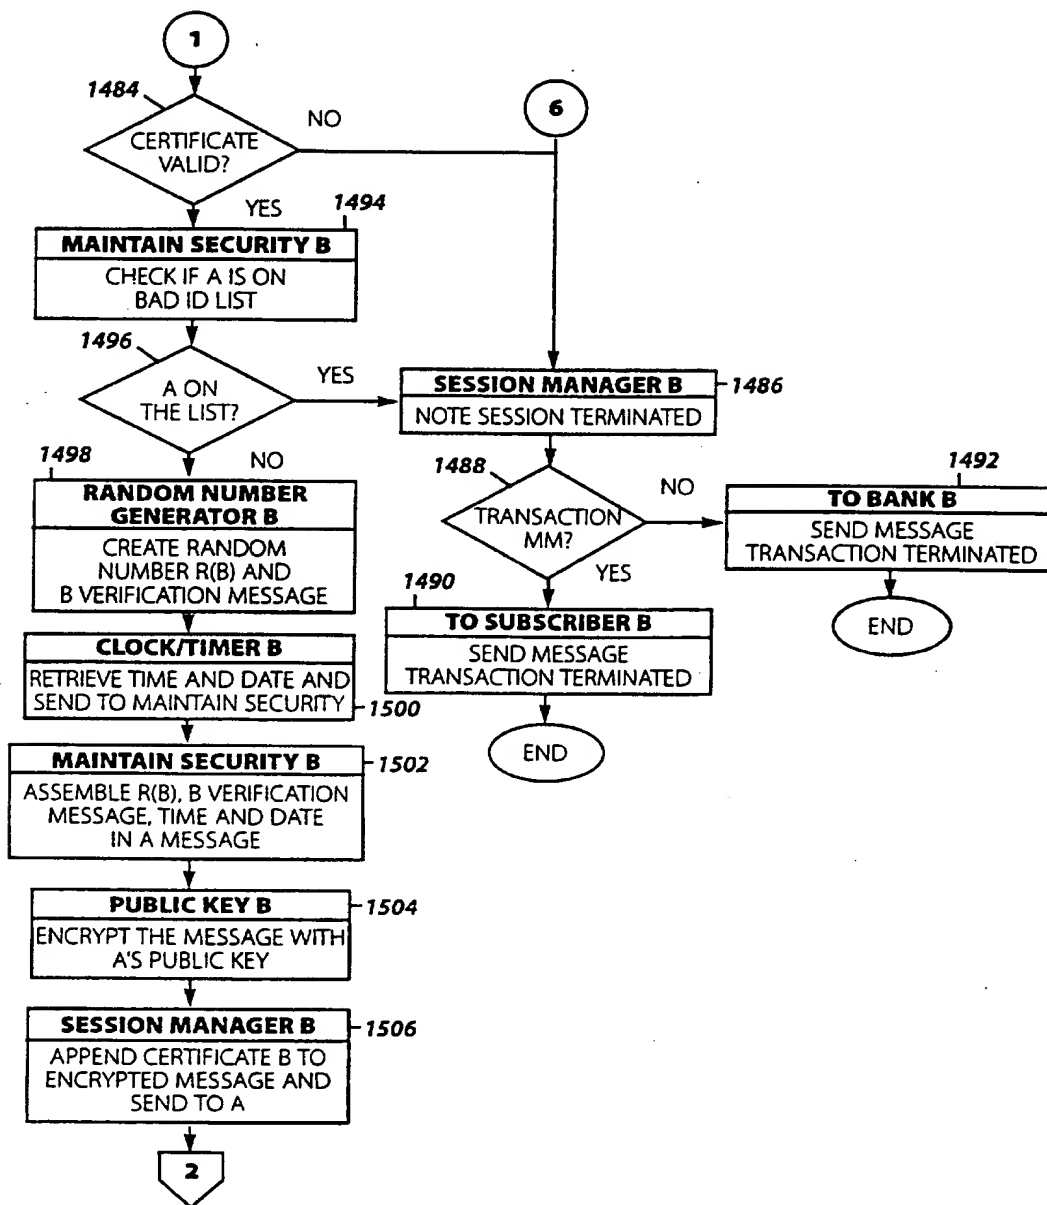


Figure 7B

19/54

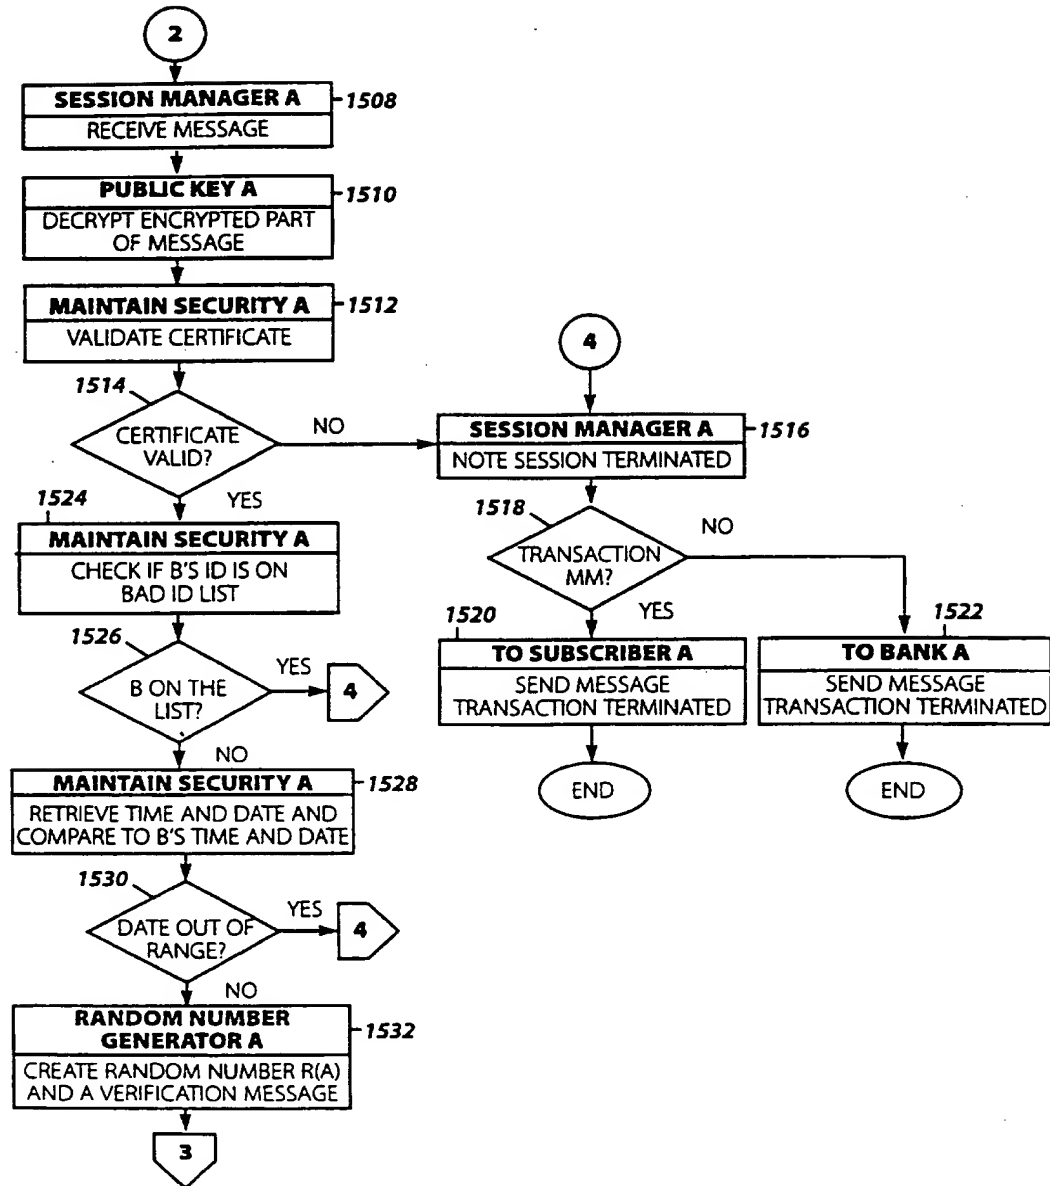


Figure 7C

SUBSTITUTE SHEET (RULE 26)

20/54

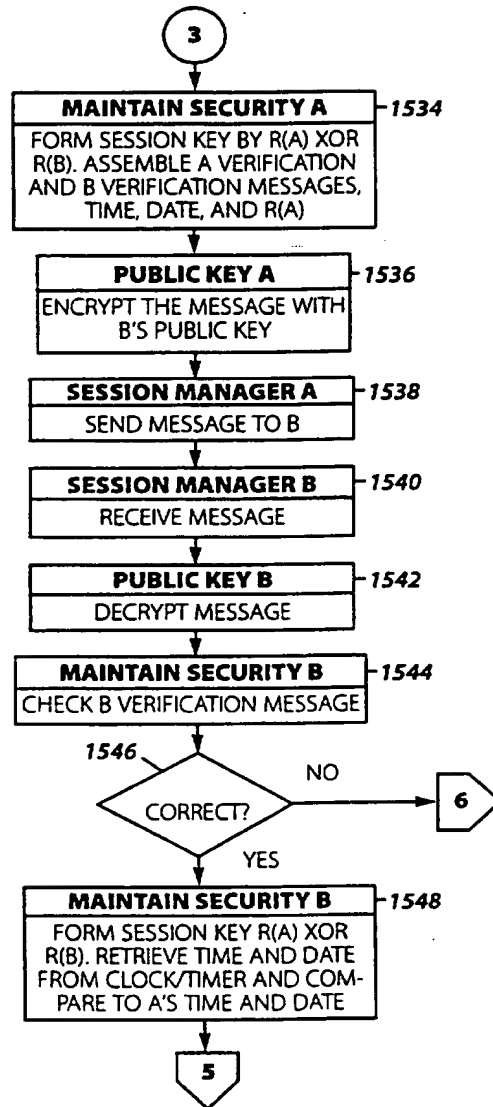


Figure 7D

SUBSTITUTE SHEET (RULE 26)

21/54

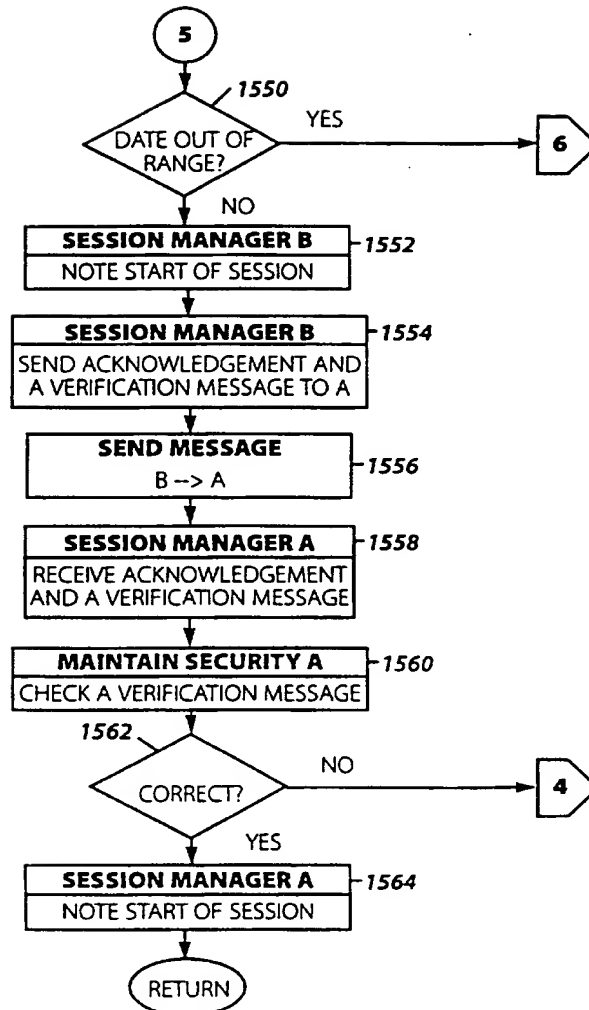


Figure 7E

SUBSTITUTE SHEET (RULE 26)

22/54

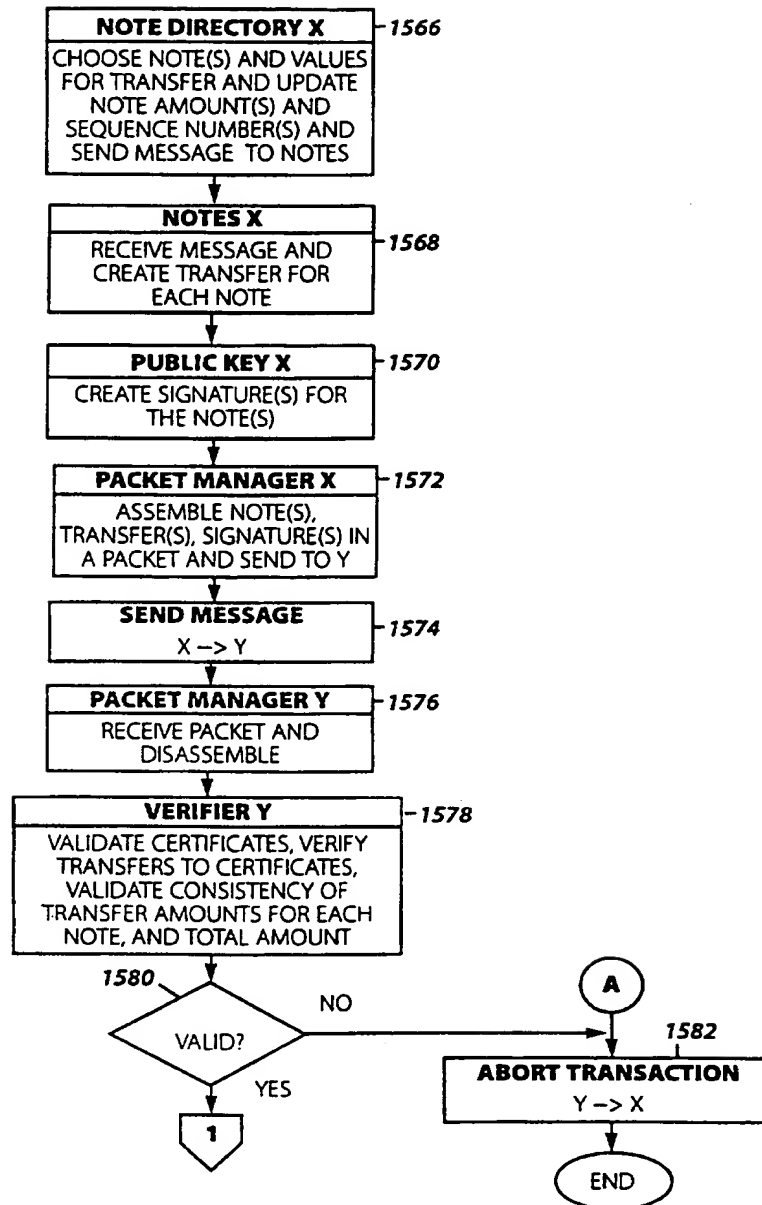


Figure 8A

SUBSTITUTE SHEET (RULE 26)

23/54

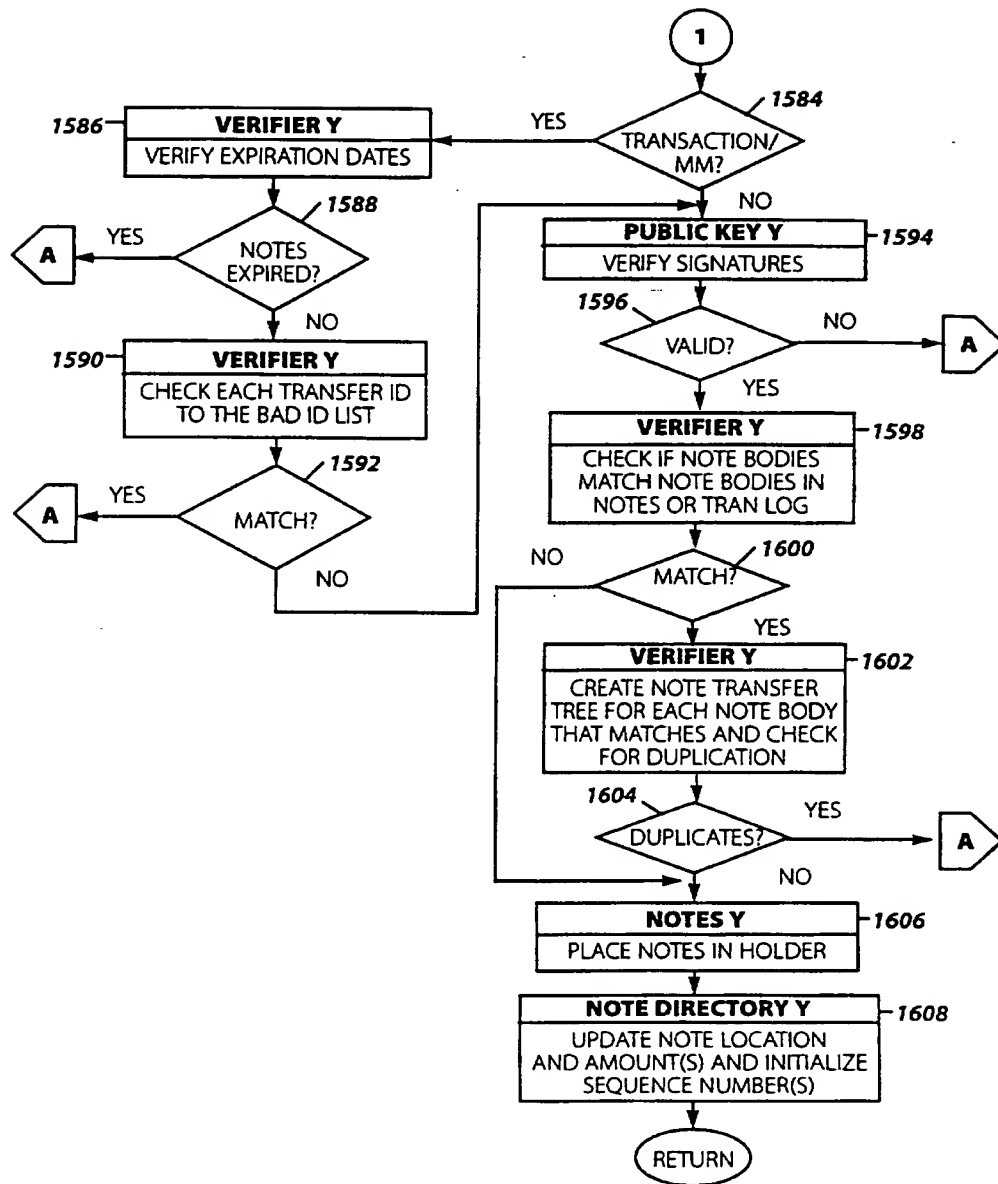


Figure 8B

SUBSTITUTE SHEET (RULE 26)

24/54

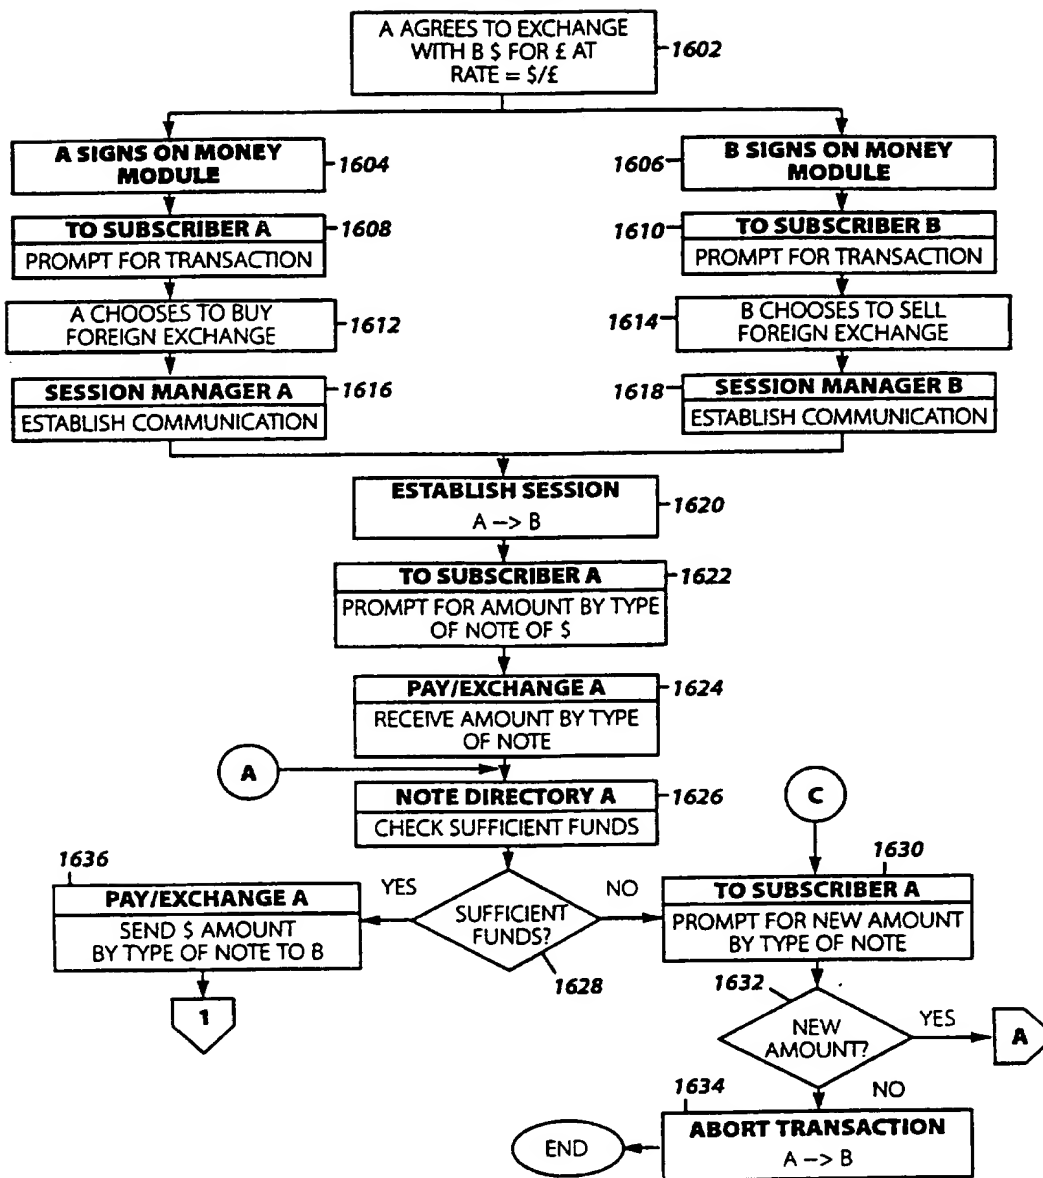


Figure 9A

SUBSTITUTE SHEET (RULE 26)

25/54

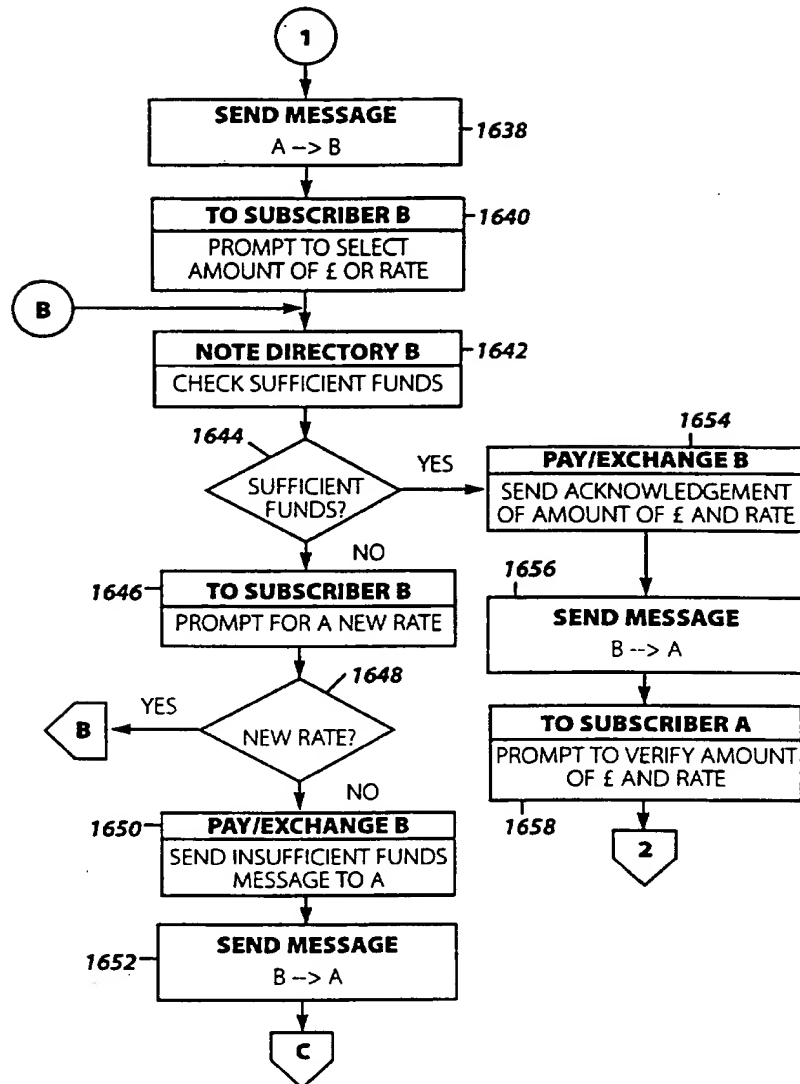


Figure 9B

SUBSTITUTE SHEET (RULE 26)



26/54

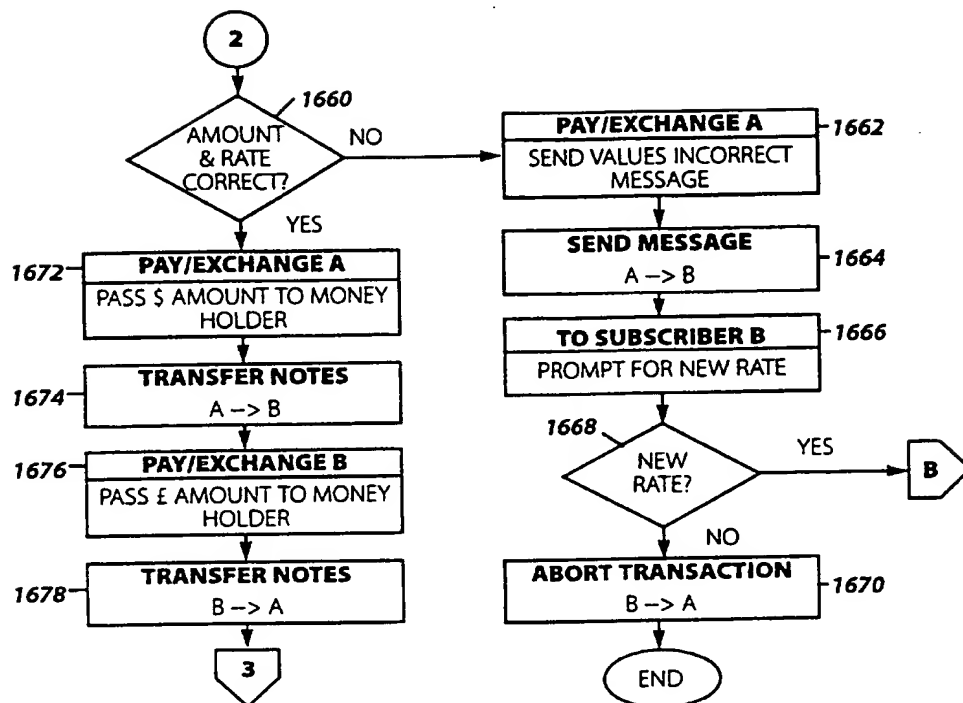


Figure 9C

SUBSTITUTE SHEET (RULE 26)

27/54

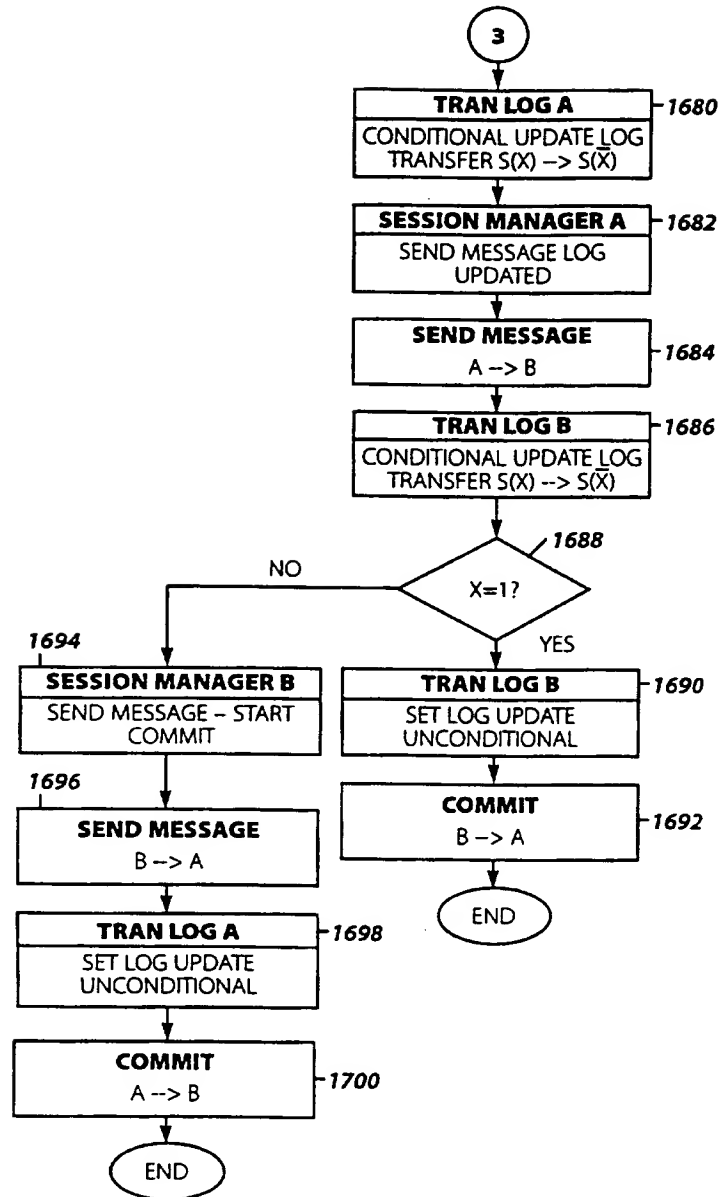


Figure 9D

SUBSTITUTE SHEET (RULE 26)

28/54

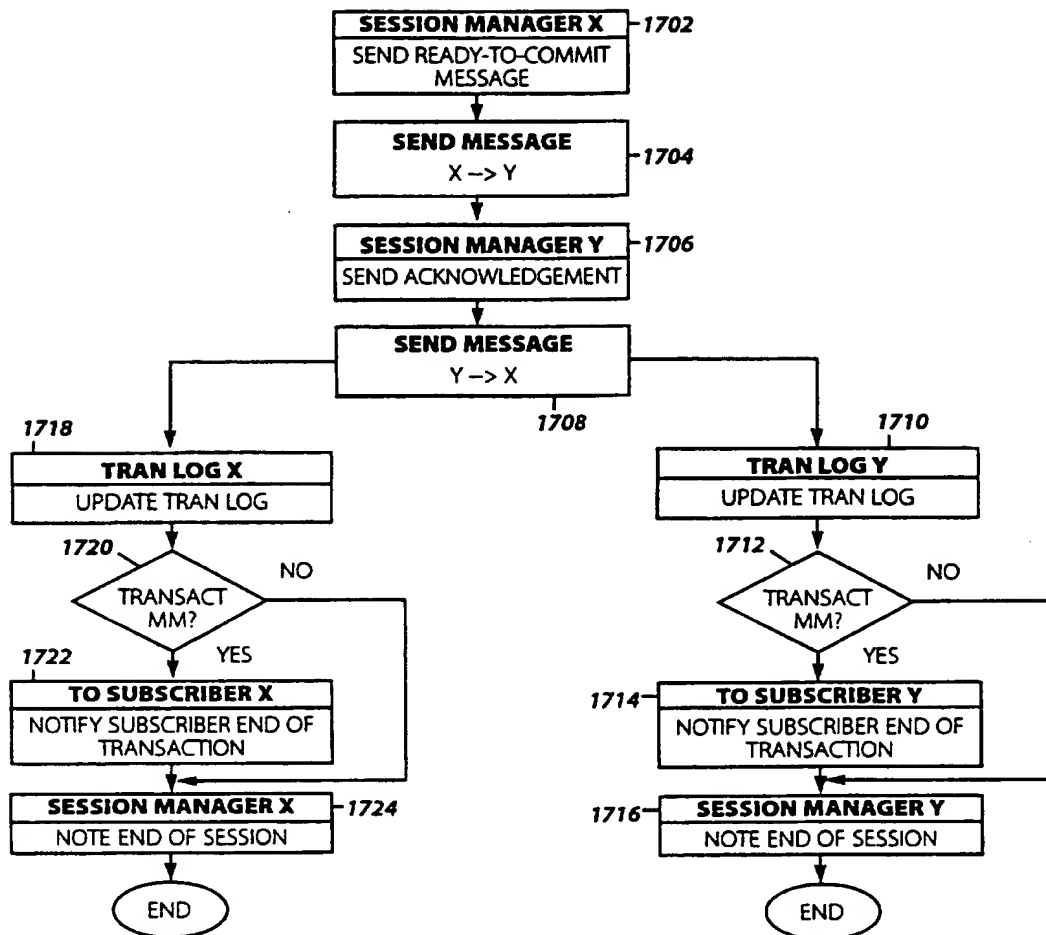


Figure 10

SUBSTITUTE SHEET (RULE 26)

29/54

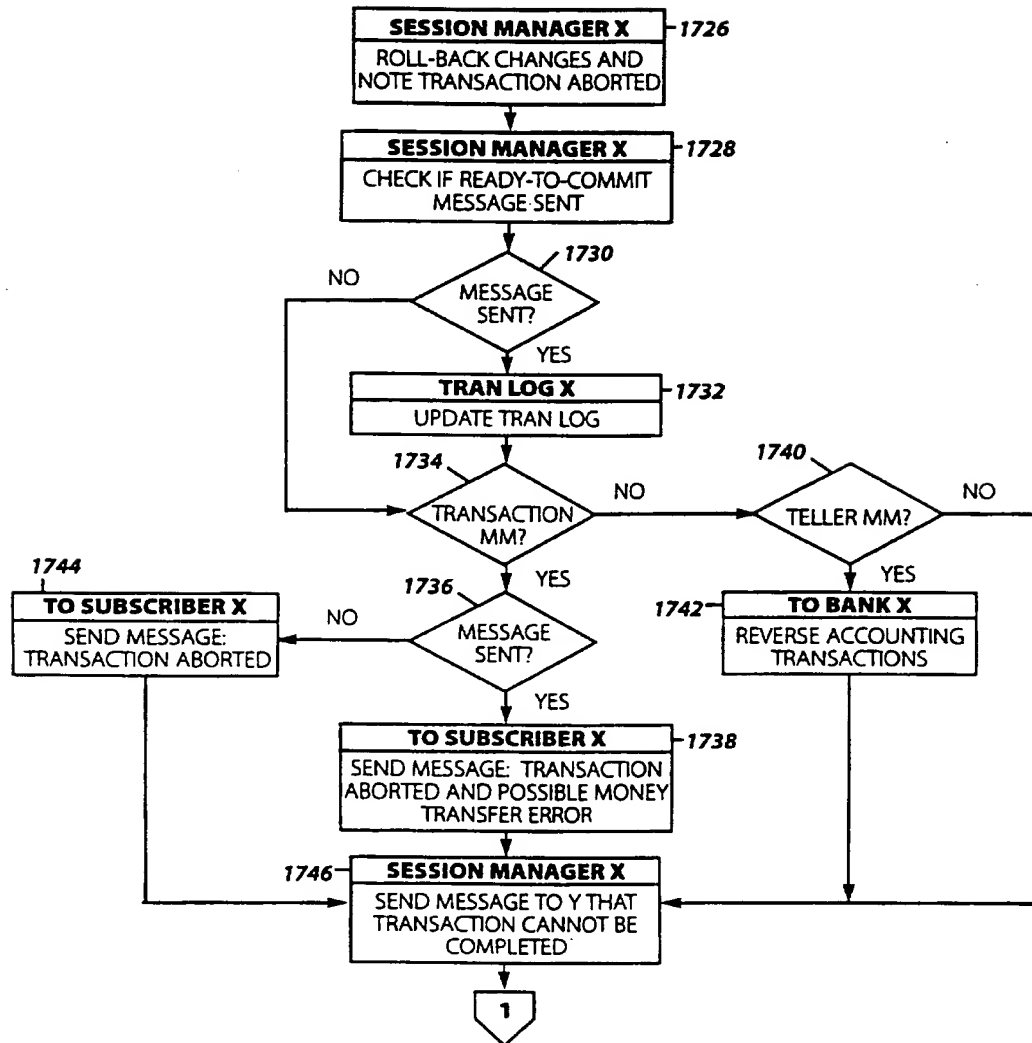


Figure 11A

SUBSTITUTE SHEET (RULE 26)

30/54

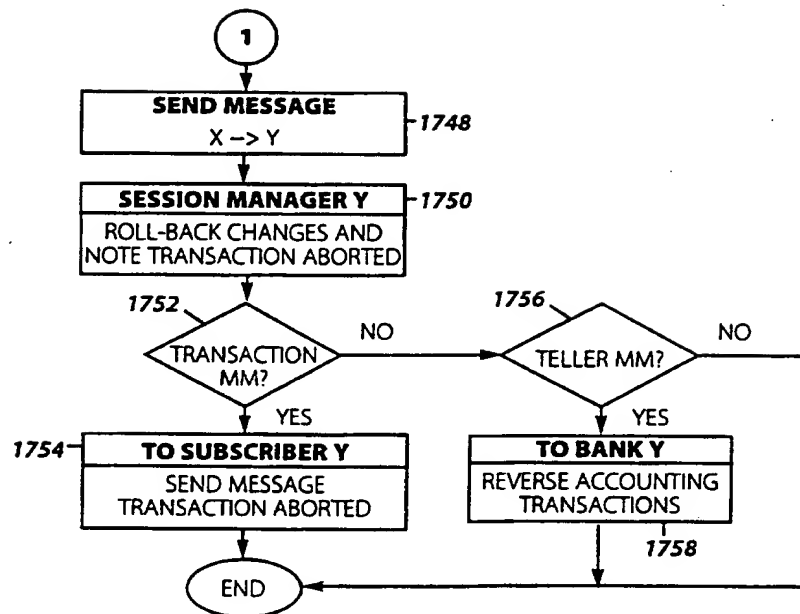


Figure 11B

SUBSTITUTE SHEET (RULE 26)

31/54

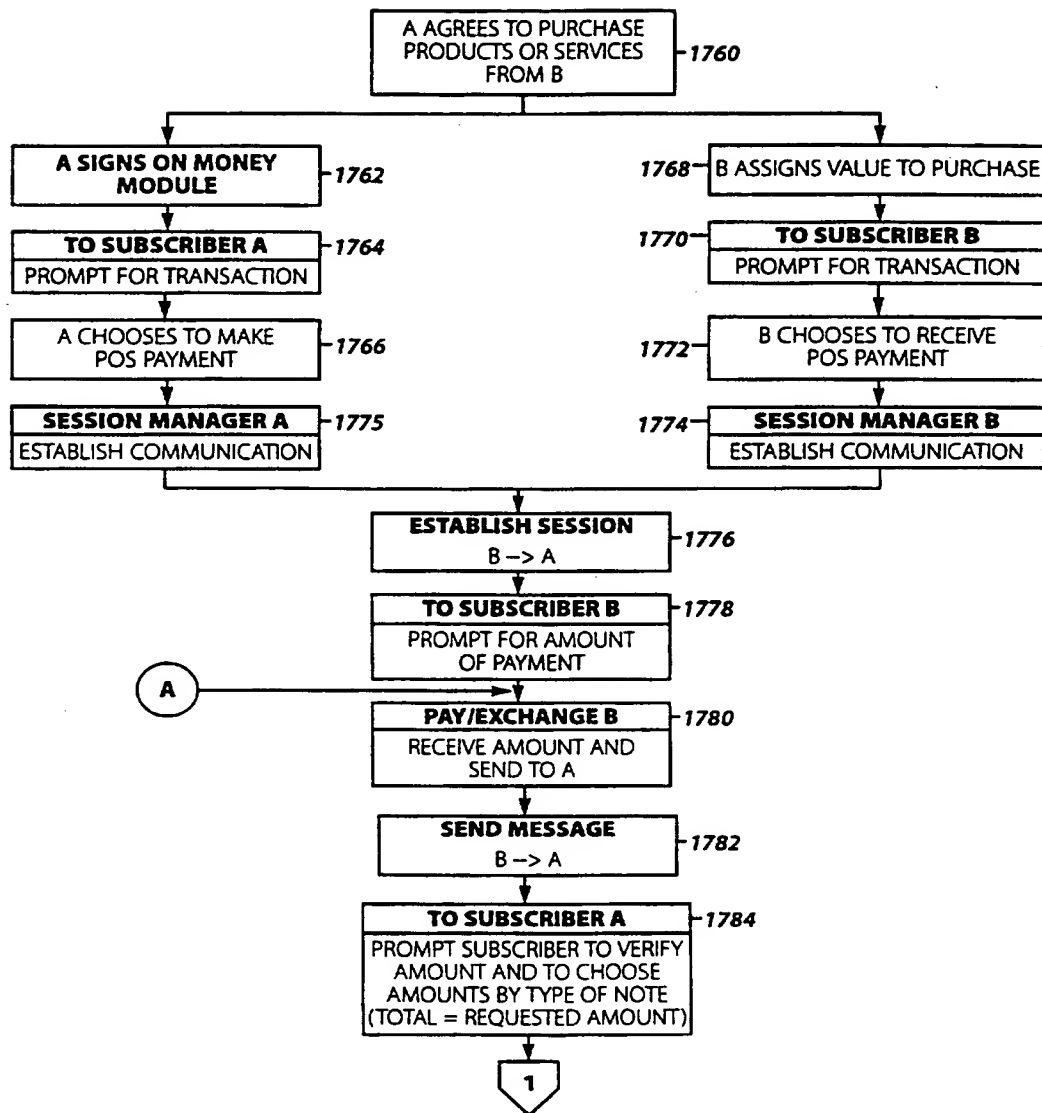


Figure 12A

SUBSTITUTE SHEET (RULE 26)

32/54

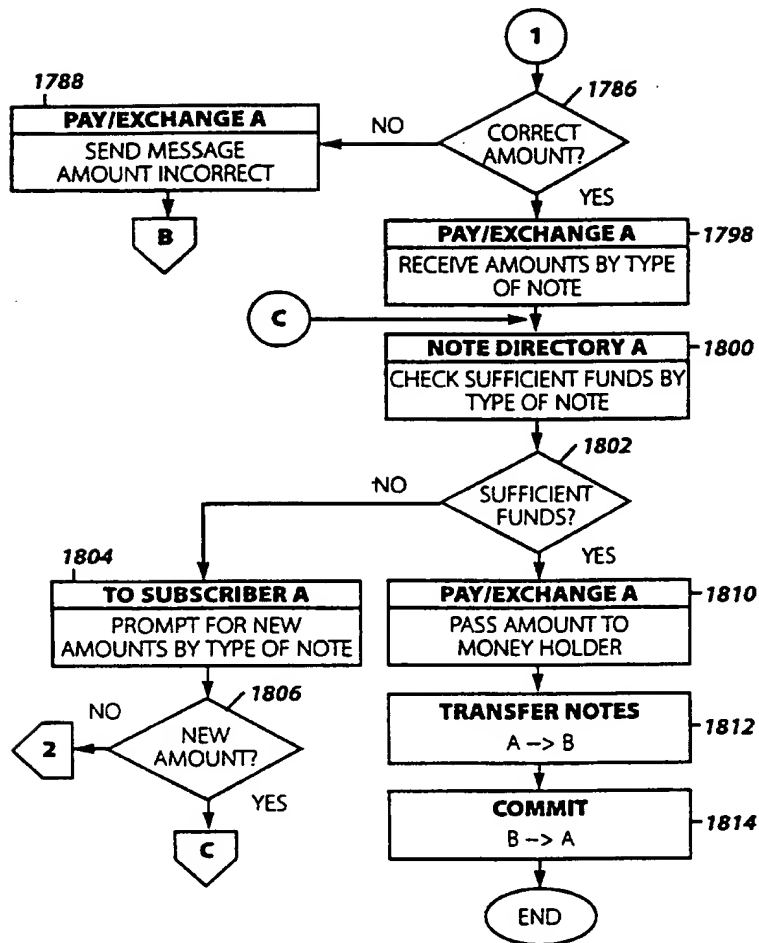


Figure 12B

SUBSTITUTE SHEET (RULE 26)

33/54

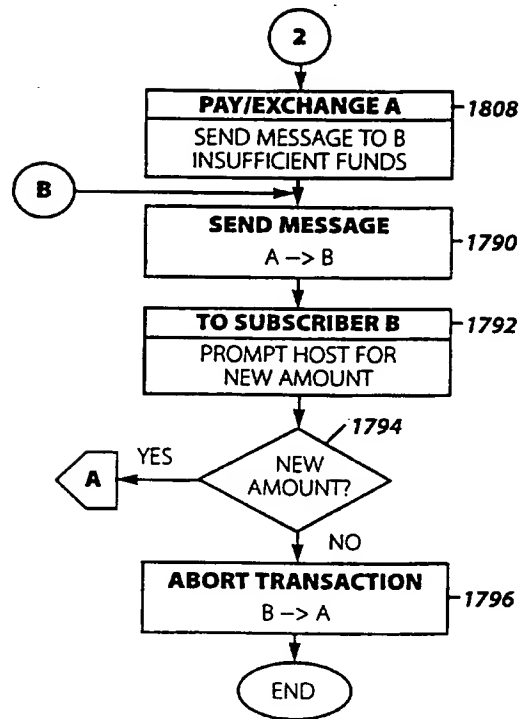


Figure 12C

SUBSTITUTE SHEET (RULE 26)



34/54

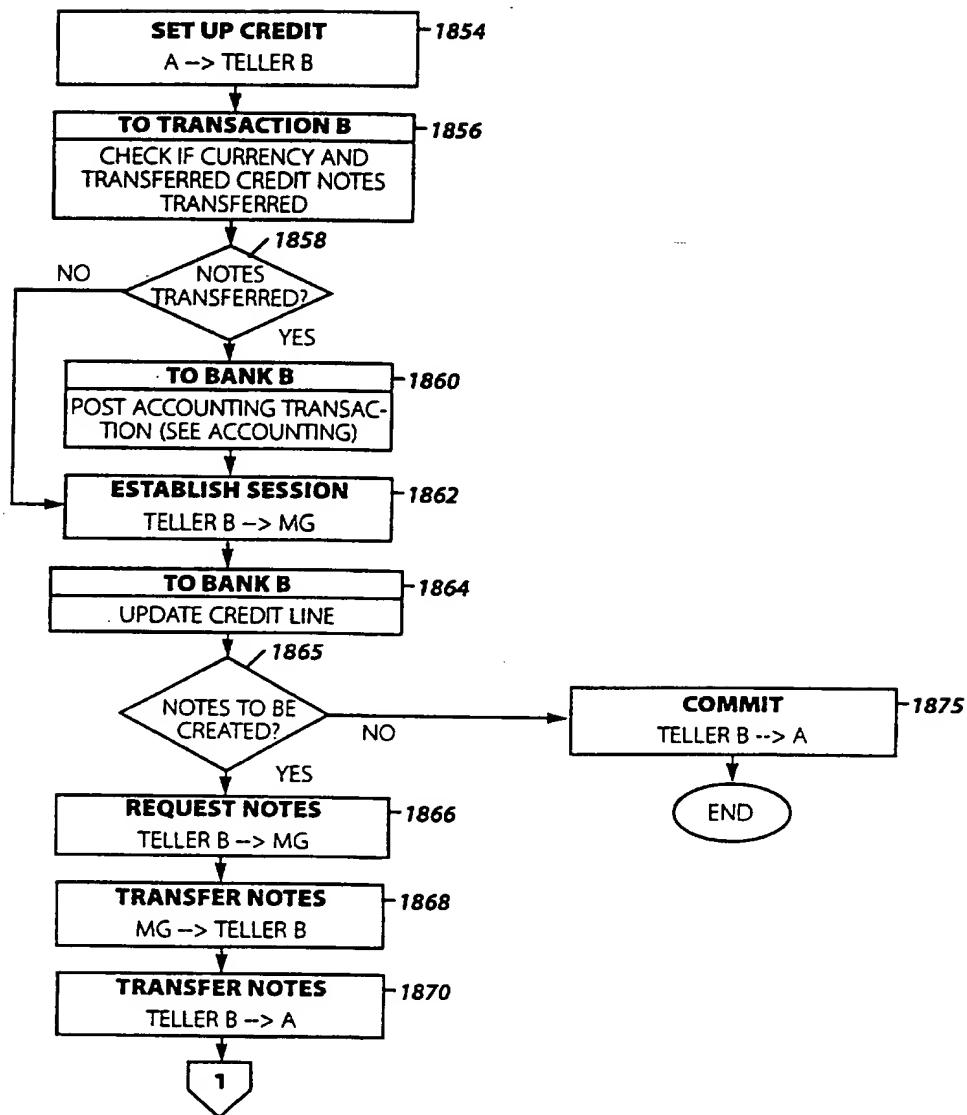
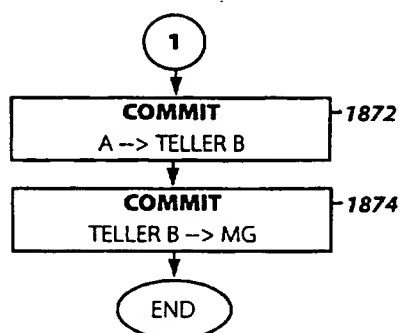


Figure 13A

SUBSTITUTE SHEET (RULE 26)

35/54

*Figure 13B***SUBSTITUTE SHEET (RULE 26)**

36/54

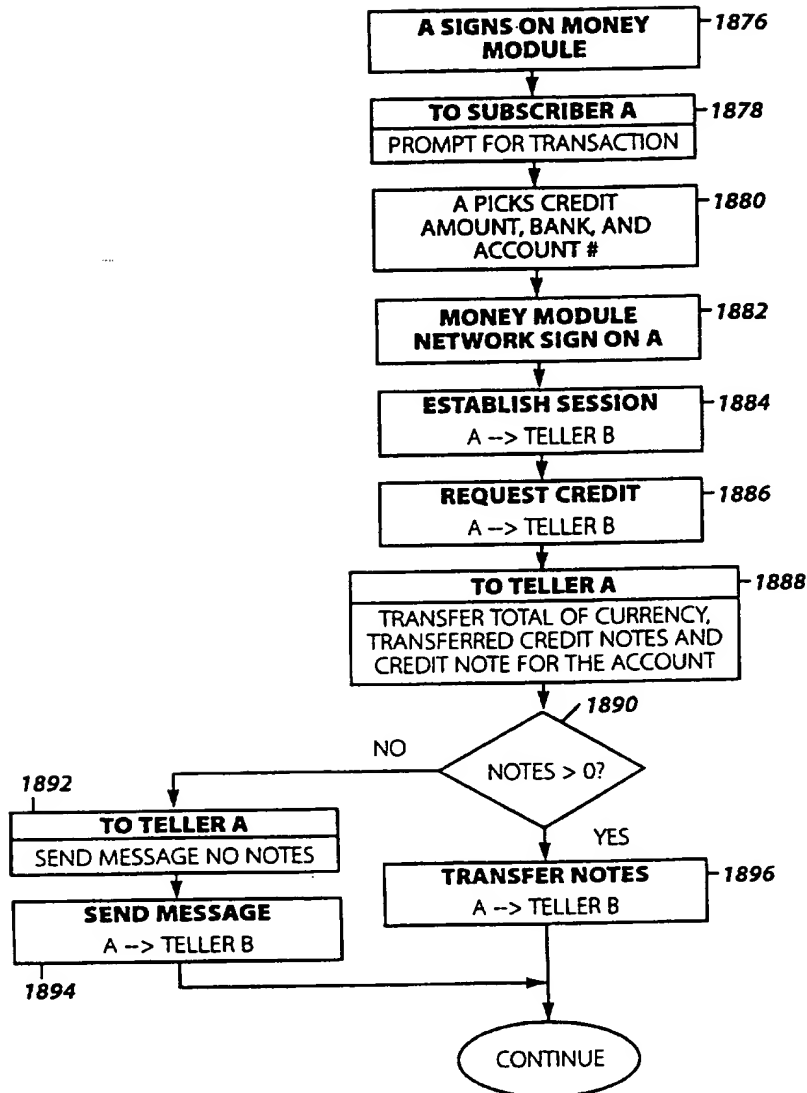


Figure 14

SUBSTITUTE SHEET (RULE 26)

37/54

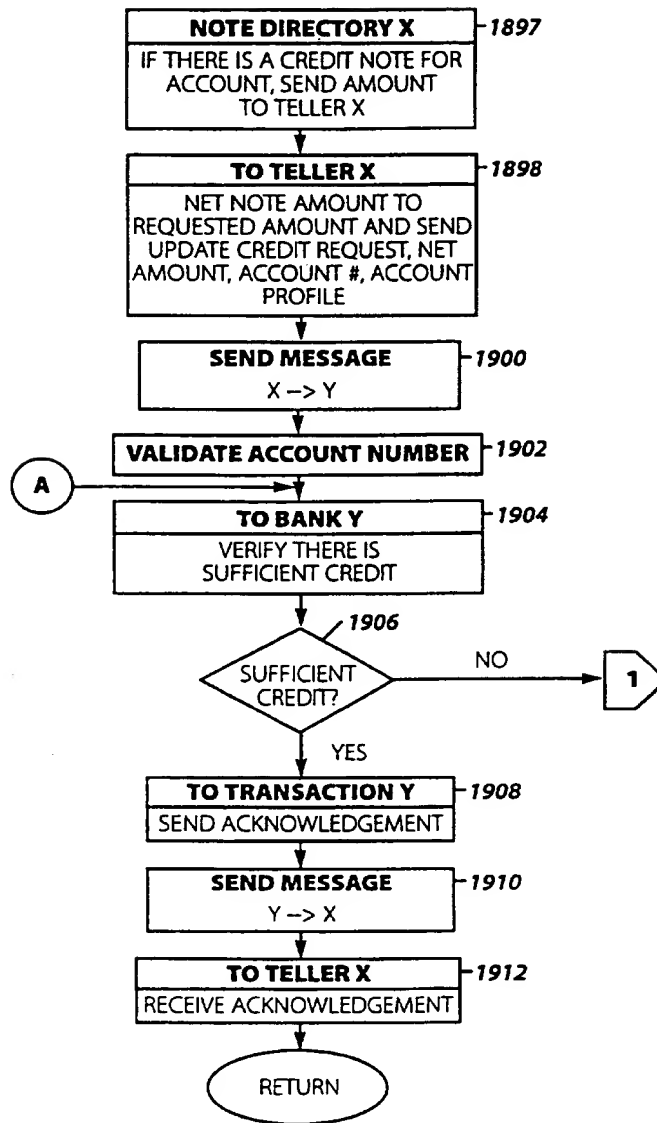


Figure 15A

SUBSTITUTE SHEET (RULE 26)

38/54

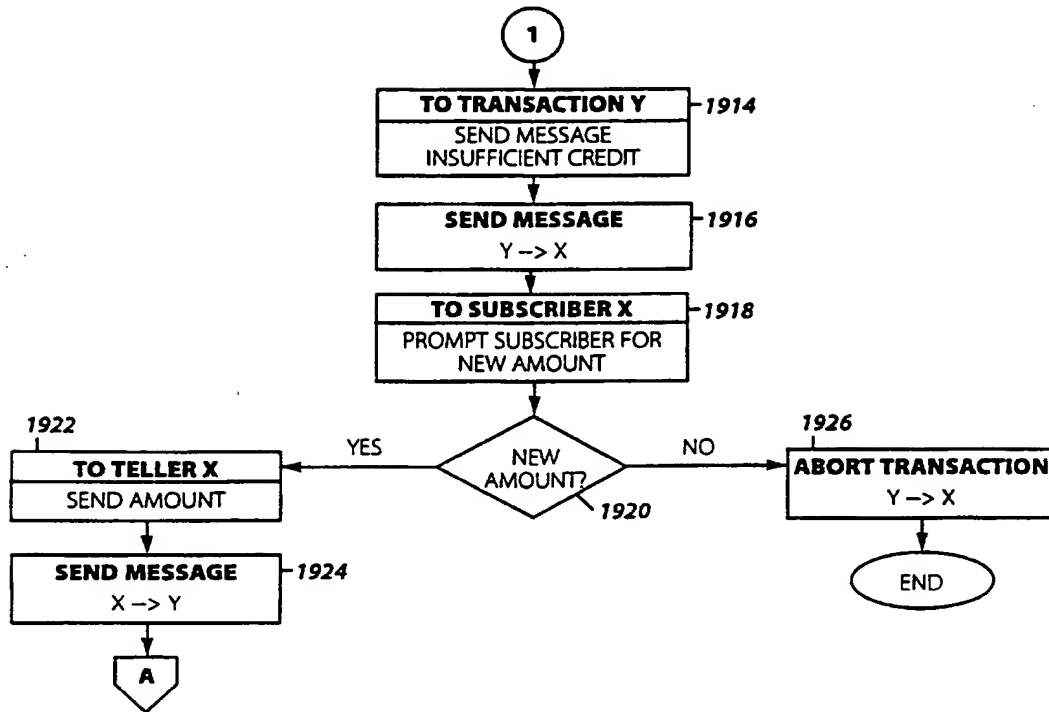


Figure 15B

SUBSTITUTE SHEET (RULE 26)

39/54


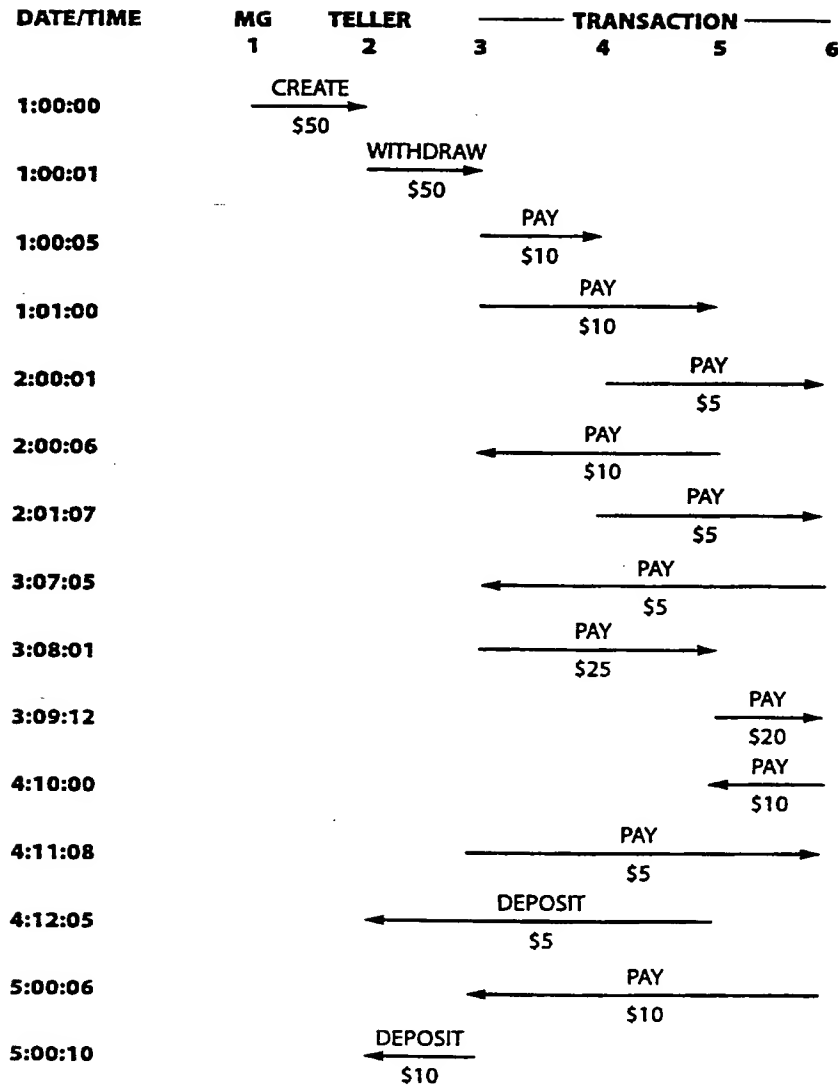


Figure 16

SUBSTITUTE SHEET (RULE 26)

40/54

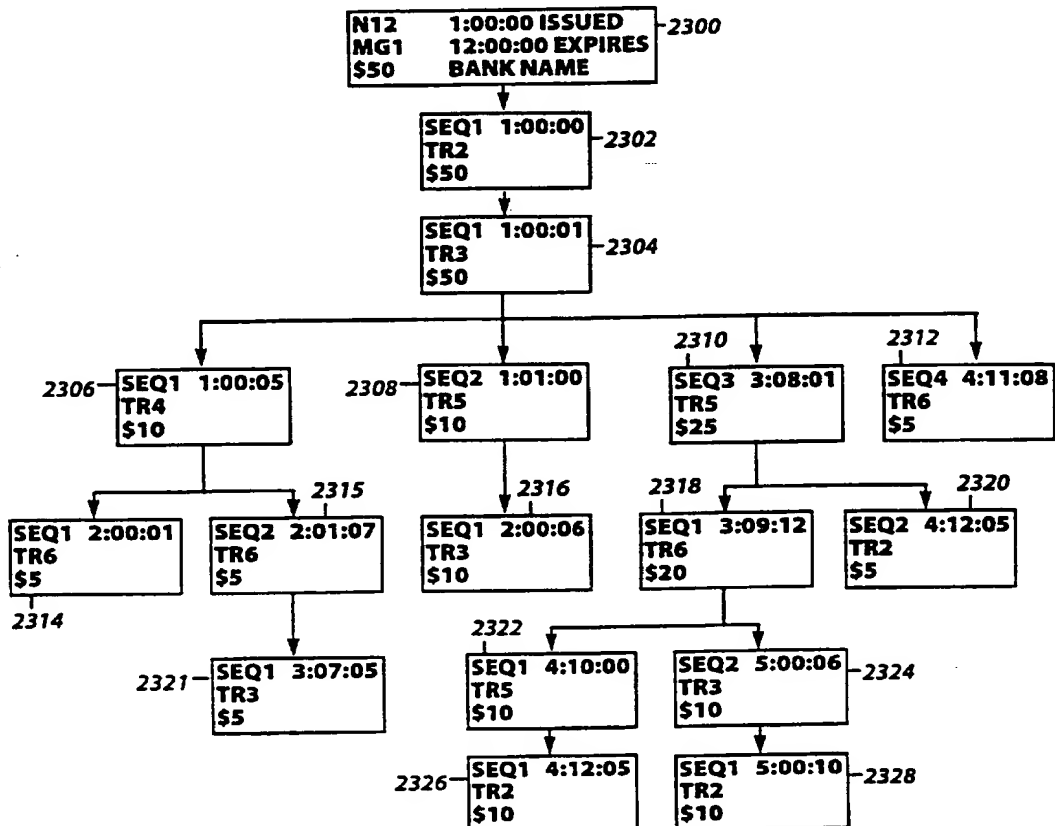

SEQ = SEQUENCE NUMBER  
 TR = TRANSFEREE  
 D:TT:TT = DATE:TIME

Figure 17

SUBSTITUTE SHEET (RULE 26)

41/54

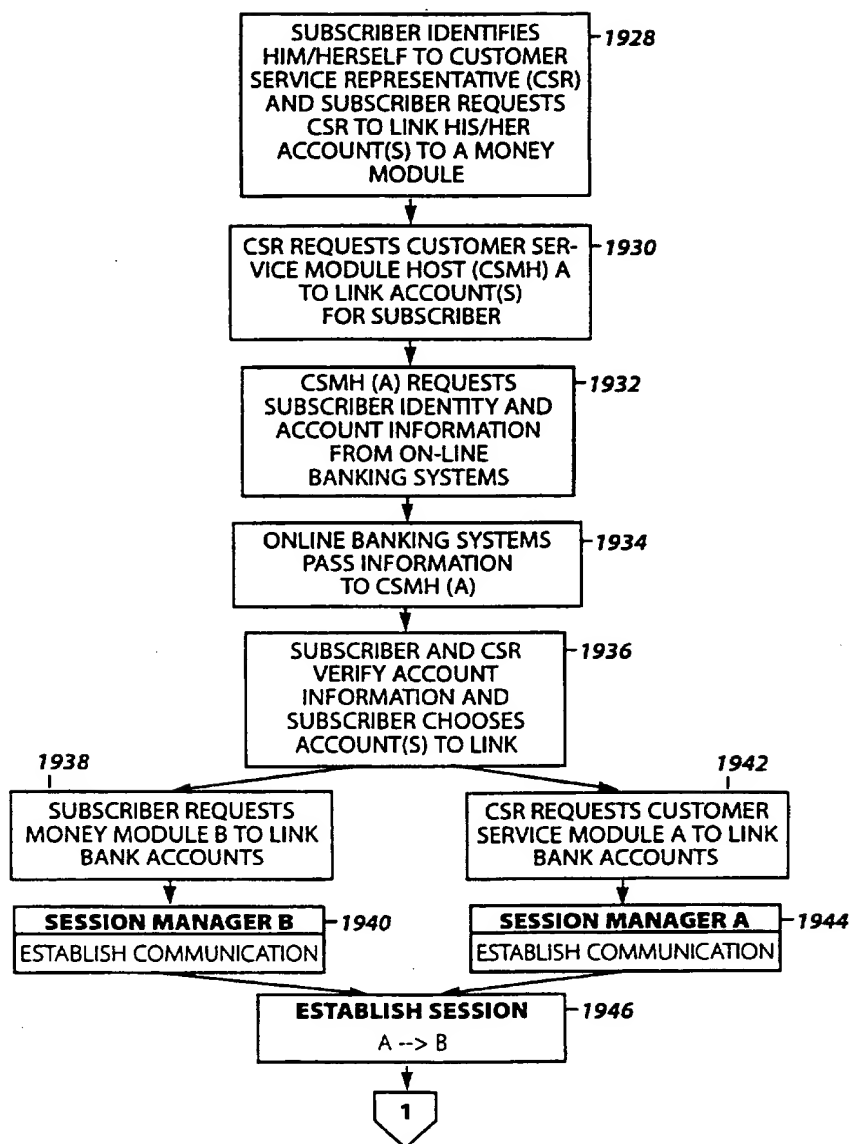


Figure 18A

SUBSTITUTE SHEET (RULE 26)



42/54

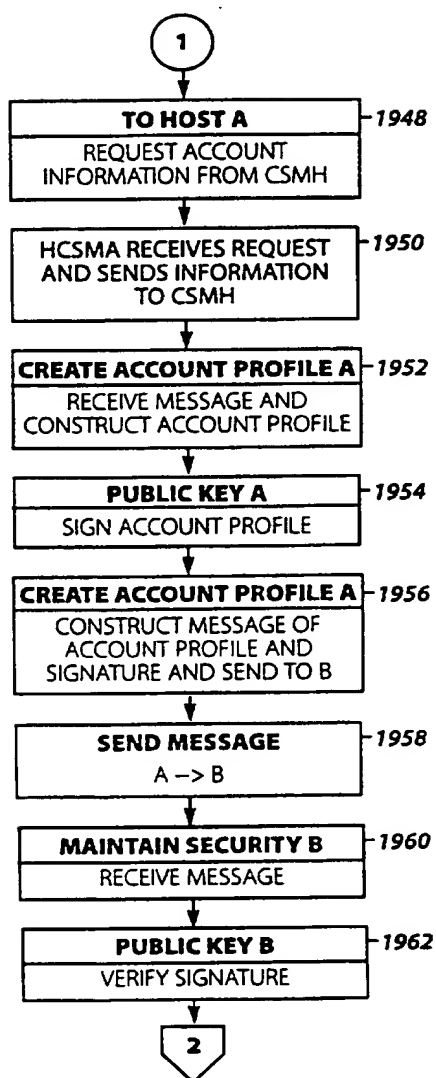


Figure 18B

SUBSTITUTE SHEET (RULE 26)

43/54

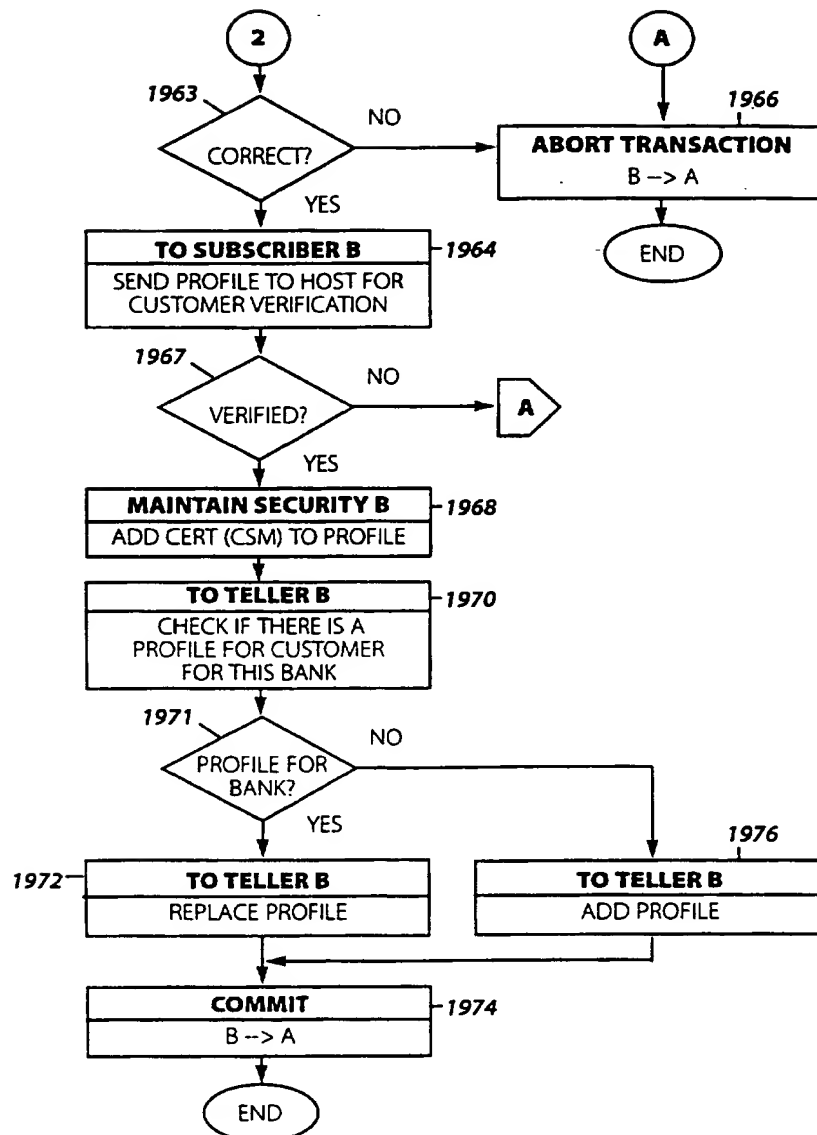


Figure 18C

SUBSTITUTE SHEET (RULE 26)

44/54

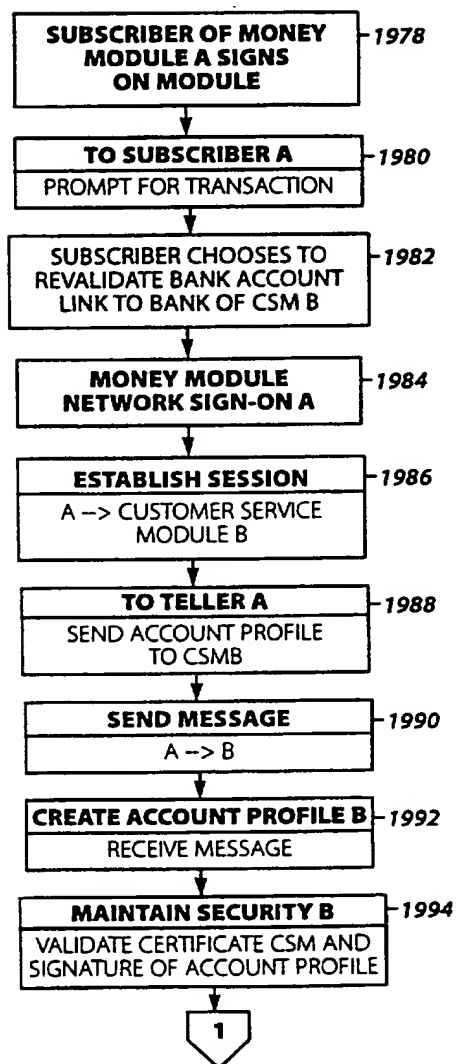


Figure 19A

SUBSTITUTE SHEET (RULE 26)

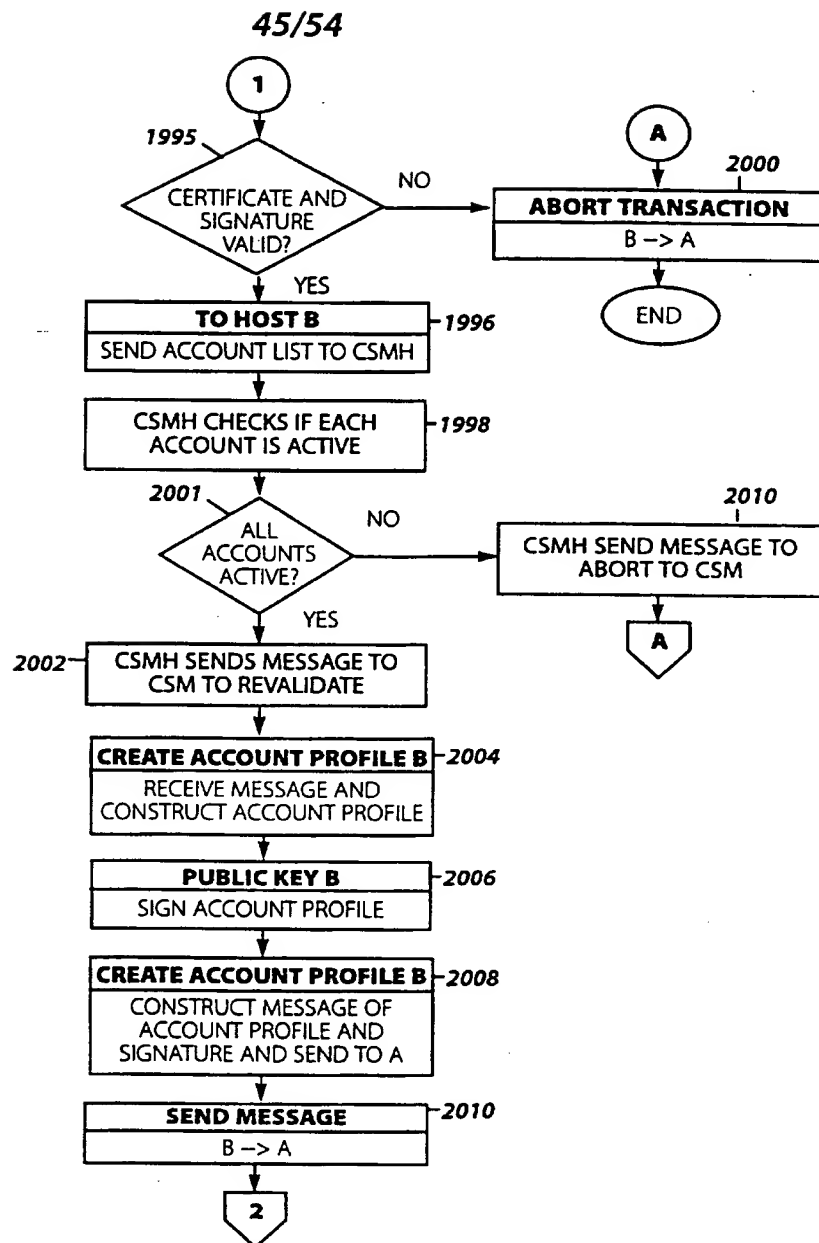


Figure 19B

46/54

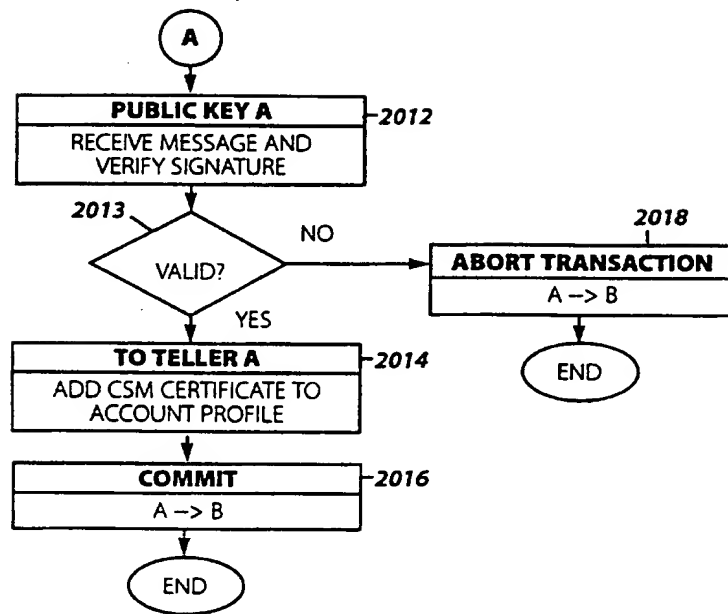


Figure 19C

SUBSTITUTE SHEET (RULE 26)

47/54

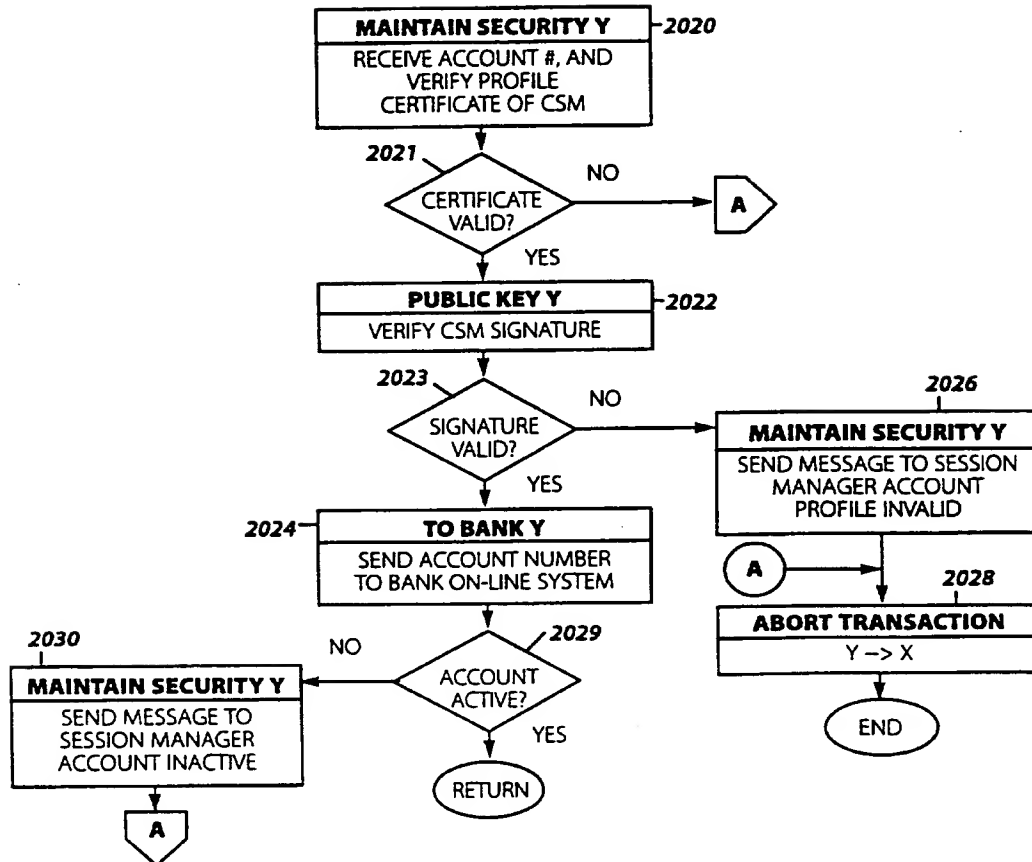


Figure 20

SUBSTITUTE SHEET (RULE 26)

48/54

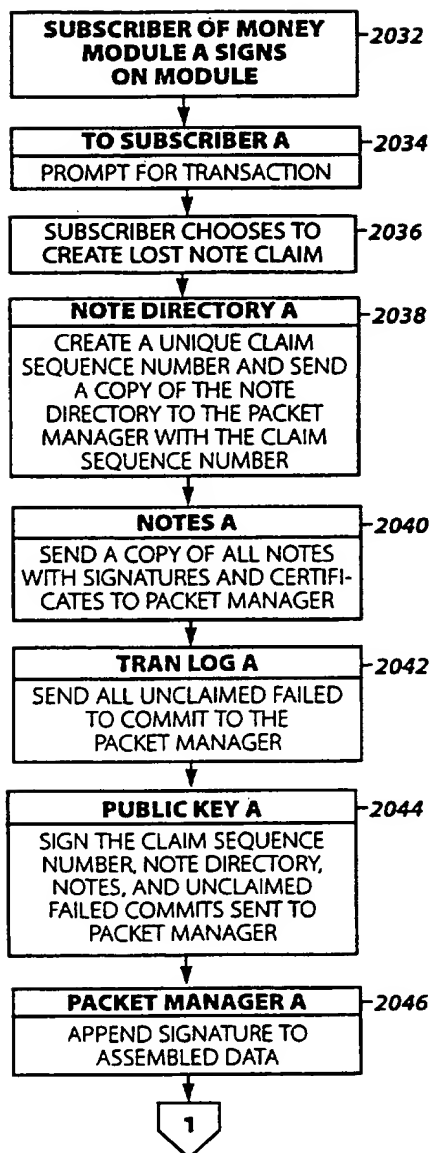


Figure 21A

49/54

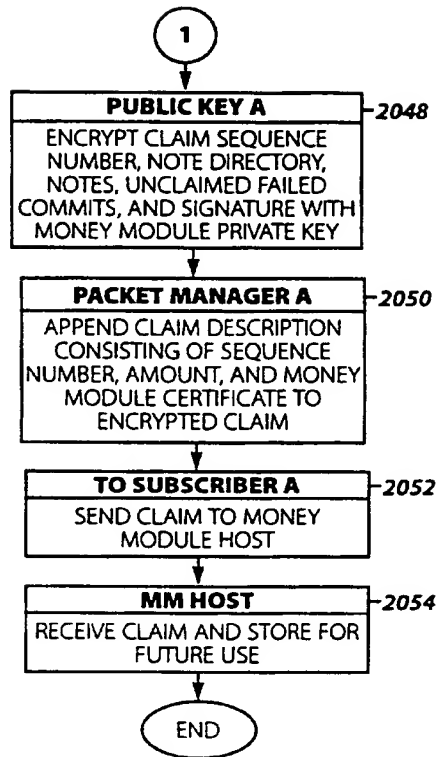


Figure 21B

SUBSTITUTE SHEET (RULE 26)



50/54


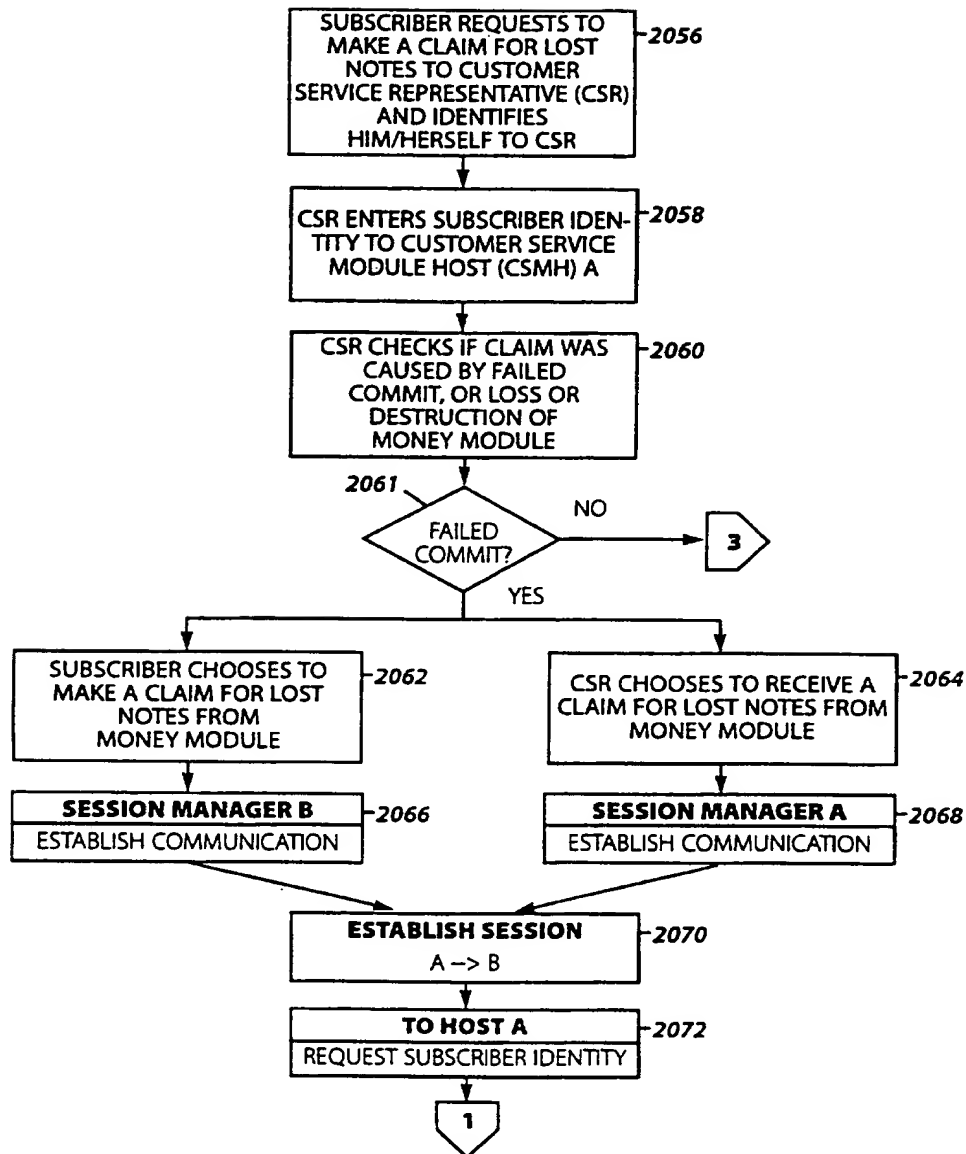


Figure 22A

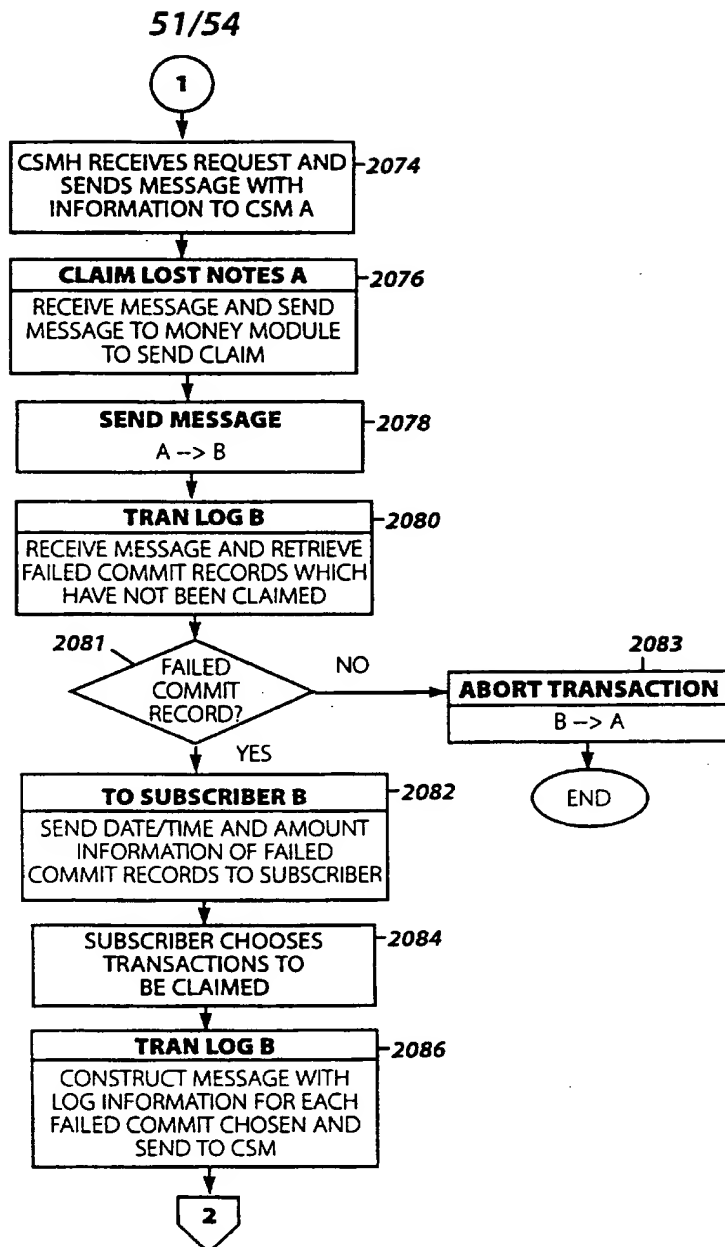

52/54

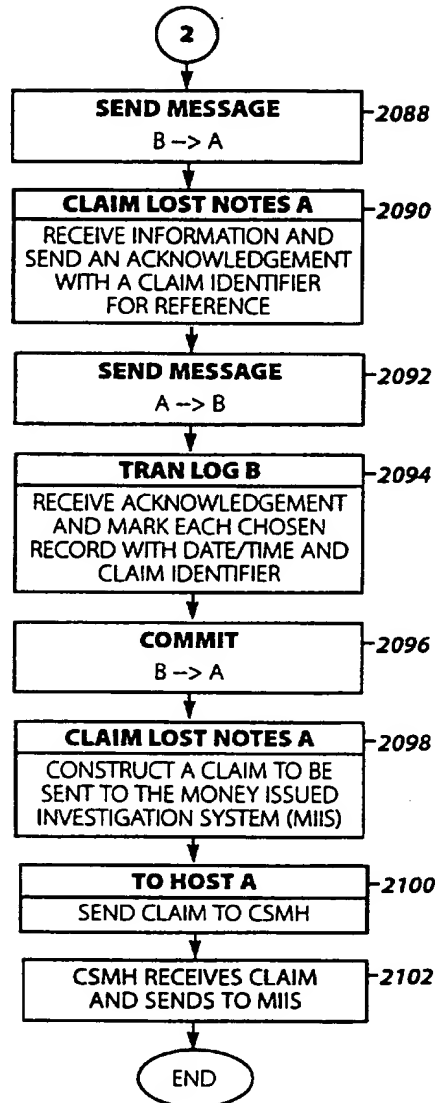


Figure 22C

SUBSTITUTE SHEET (RULE 26)

53/54

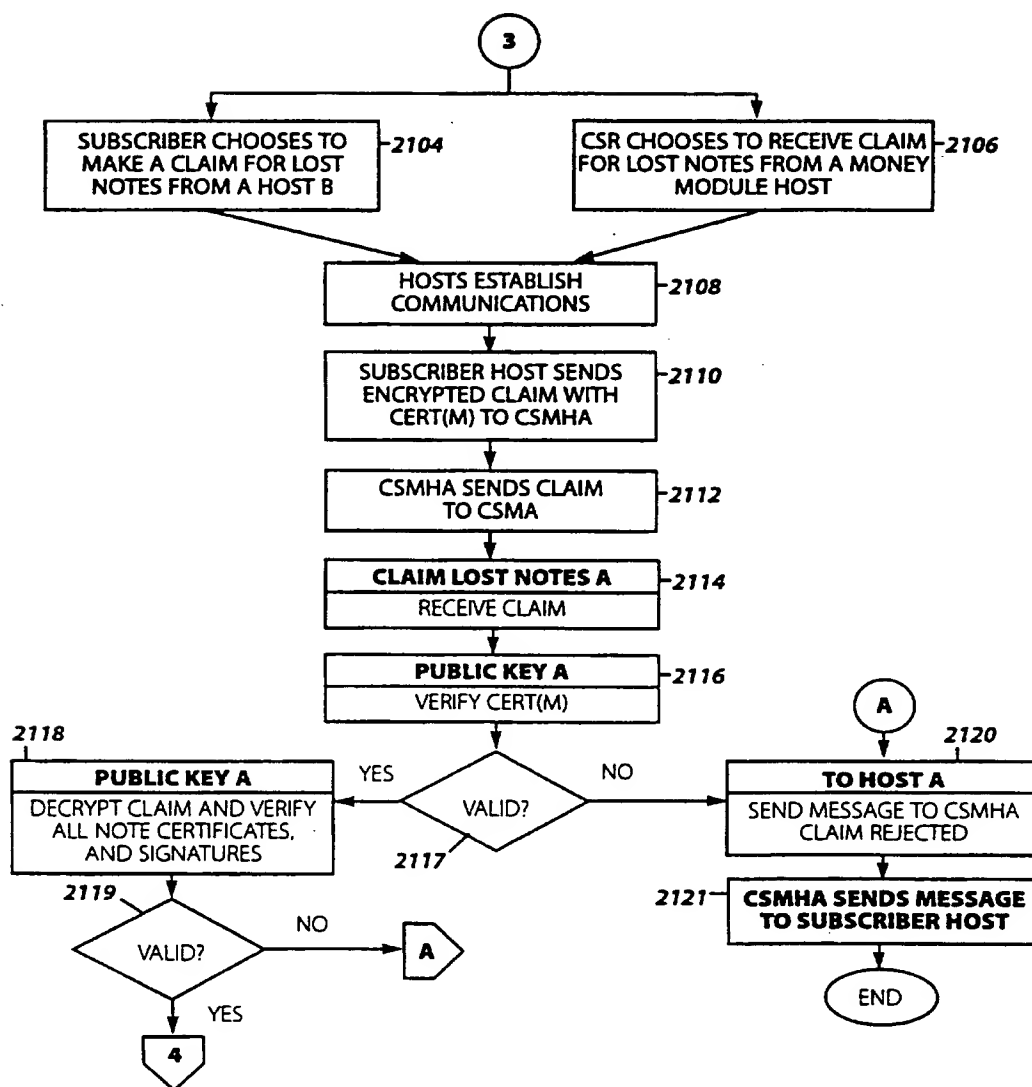


Figure 22D

SUBSTITUTE SHEET (RULE 26)

54/54

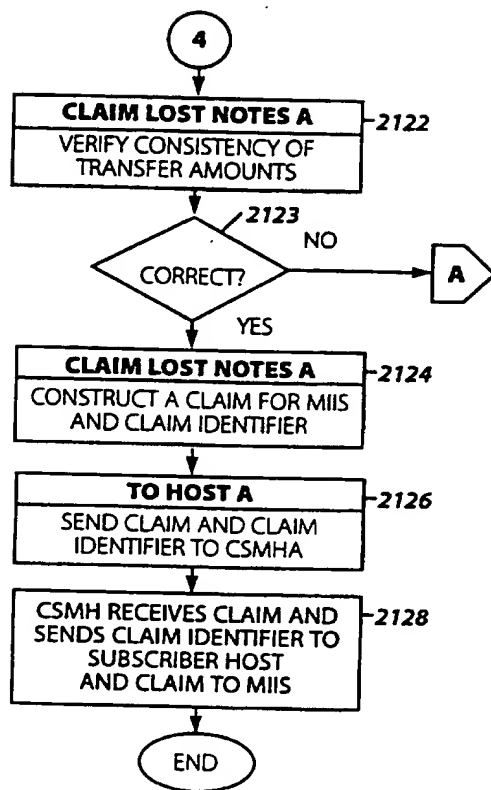


Figure 22E

SUBSTITUTE SHEET (RULE 26)

PCT

WORLD INTELLECTUAL PROPERTY ORGANIZATION  
International Bureau




INTERNATIONAL APPLICATION PUBLISHED UNDER THE PATENT COOPERATION TREATY (PCT)

(51) International Patent Classification <sup>6</sup> : <b>G07F 7/08, G06F 17/60</b>		A3	(11) International Publication Number: <b>WO 96/33476</b>
			(43) International Publication Date: 24 October 1996 (24.10.96)
(21) International Application Number: <b>PCT/US96/05521</b>		(81) Designated States: AL, AM, AT, AU, AZ, BB, BG, BR, BY, CA, CH, CN, CZ, DE, DK, EE, ES, FI, GB, GE, HU, IS, JP, KE, KG, KP, KR, KZ, LK, LR, LS, LT, LU, LV, MD, MG, MK, MN, MW, MX, NO, NZ, PL, PT, RO, RU, SD, SE, SG, SI, SK, TJ, TM, TR, TT, UA, UG, UZ, VN, ARIPO patent (KE, LS, MW, SD, SZ, UG), Eurasian patent (AM, AZ, BY, KG, KZ, MD, RU, TJ, TM), European patent (AT, BE, CH, DE, DK, ES, FI, FR, GB, GR, IE, IT, LU, MC, NL, PT, SE), OAPI patent (BF, BJ, CF, CG, CI, CM, GA, GN, ML, MR, NE, SN, TD, TG).	
(22) International Filing Date: 19 April 1996 (19.04.96)		Published <i>With international search report. Before the expiration of the time limit for amending the claims and to be republished in the event of the receipt of amendments.</i>	
(30) Priority Data: 08/427,287 21 April 1995 (21.04.95) US		(88) Date of publication of the international search report: 12 December 1996 (12.12.96)	
(71) Applicant: CITIBANK, N.A. [US/US]; 399 Park Avenue, New York, NY 10043 (US).			
(72) Inventor: ROSEN, Sholom, S.; Apartment 7A, 10 West 86th Street, New York, NY 10024 (US).			
(74) Agents: DOWLING, Thomas, P. et al.; Morgan & Finnegan, L.L.P., 345 Park Avenue, New York, NY 10154 (US).			

(54) Title: ELECTRONIC-MONETARY SYSTEM

(57) Abstract

An electronic-monetary system having (1) banks or financial institutions that are coupled to a money generator device for generating and issuing to subscribing customers electronic money including electronic currency backed by demand deposits and electronic credit authorizations; (2) correspondent banks that accept and distribute the electronic money; (3) a plurality of transaction devices that are used by subscribers for storing electronic money, for performing money transactions with the on-line systems of the participating banks or for exchanging electronic money with other like transaction devices in off-line transactions; (4) teller devices, associated with the issuing and correspondent banks, for process handling and interfacing the transaction devices to the issuing and correspondent banks, and for interfacing between the issuing and correspondent banks themselves; (5) a clearing bank for balancing the electronic money accounts of the different issuing banks; (6) a data communications network for providing communications services to all components of the system; and (7) a security arrangement for maintaining the integrity of the system, and for detecting counterfeiting and tampering within the system. An embodiment of the invention includes a customer service module which handles lost money claims and links accounts to money modules for providing bank access.

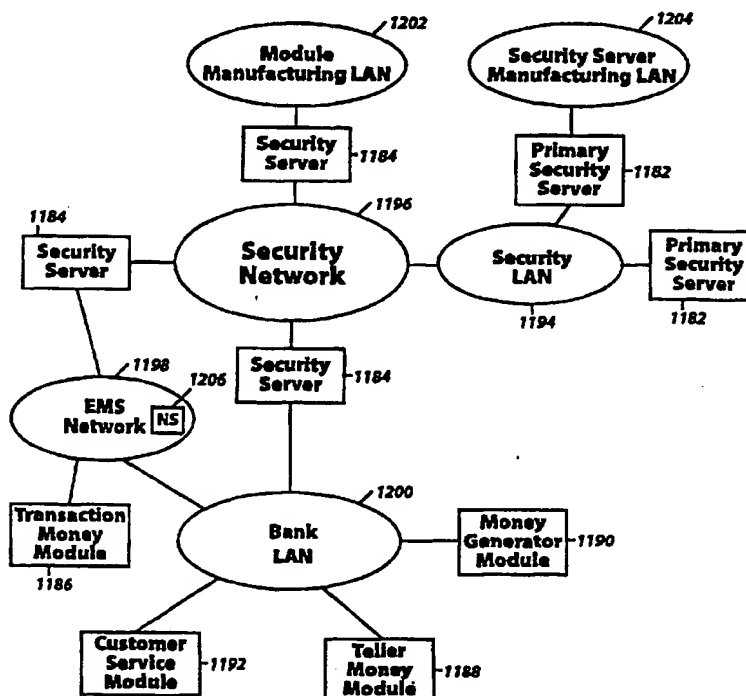

## INTERNATIONAL SEARCH REPORT

International Application No  
PCT/US 96/05521

A. CLASSIFICATION OF SUBJECT MATTER  
IPC 6 G07F7/08 G06F17/60

According to International Patent Classification (IPC) or to both national classification and IPC

## B. FIELDS SEARCHED

Minimum documentation searched (classification system followed by classification symbols)  
IPC 6 G07F G06F

Documentation searched other than minimum documentation to the extent that such documents are included in the fields searched

Electronic data base consulted during the international search (name of data base and, where practical, search terms used)

## C. DOCUMENTS CONSIDERED TO BE RELEVANT

Category *	Citation of document, with indication, where appropriate, of the relevant passages	Relevant to claim No.
A	WO,A,93 10503 (CITIBANK) 27 May 1993 cited in the application see abstract; claims; figures ---	1-82
X A	WO,A,93 08545 (JONHIG) 29 April 1993 see abstract; claims; figures  see page 11, line 8 - page 13, line 25 --- -/--	3 1,2,4,5, 15,28, 38,40, 42-45, 49,50

☒ Further documents are listed in the continuation of box C.

☒ Patent family members are listed in annex.

## \* Special categories of cited documents:

- \*A\* document defining the general state of the art which is not considered to be of particular relevance
- \*E\* earlier document but published on or after the international filing date
- \*L\* document which may throw doubts on priority claim(s) or which is cited to establish the publication date of another citation or other special reason (as specified)
- \*O\* document referring to an oral disclosure, use, exhibition or other means
- \*P\* document published prior to the international filing date but later than the priority date claimed

\*T\* later document published after the international filing date or priority date and not in conflict with the application but cited to understand the principle or theory underlying the invention

\*X\* document of particular relevance; the claimed invention cannot be considered novel or cannot be considered to involve an inventive step when the document is taken alone

\*Y\* document of particular relevance; the claimed invention cannot be considered to involve an inventive step when the document is combined with one or more other such documents, such combination being obvious to a person skilled in the art

\*Z\* document member of the same patent family

Date of the actual completion of the international search

26 September 1996

Date of mailing of the international search report

31. 10. 96

Name and mailing address of the ISA

European Patent Office, P.B. 5818 Patentlaan 2  
NL - 2280 HV Rijswijk  
Tel. (+ 31-70) 340-2040, Tx. 31 651 epo nl,  
Fax (+ 31-70) 340-3016

Authorized officer

David, J

**FOR THE PURPOSES OF INFORMATION ONLY**

Codes used to identify States party to the PCT on the front pages of pamphlets publishing international applications under the PCT.

AM	Armenia	GB	United Kingdom	MW	Malawi
AT	Austria	GE	Georgia	MX	Mexico
AU	Australia	GN	Guinea	NE	Niger
BB	Barbados	GR	Greece	NL	Netherlands
BE	Belgium	HU	Hungary	NO	Norway
BF	Burkina Faso	IE	Ireland	NZ	New Zealand
BG	Bulgaria	IT	Italy	PL	Poland
BJ	Benin	JP	Japan	PT	Portugal
BR	Brazil	KE	Kenya	RO	Romania
BY	Belarus	KG	Kyrgyzstan	RU	Russian Federation
CA	Canada	KP	Democratic People's Republic of Korea	SD	Sudan
CF	Central African Republic	KR	Republic of Korea	SE	Sweden
CG	Congo	KZ	Kazakhstan	SG	Singapore
CH	Switzerland	LI	Liechtenstein	SI	Slovenia
CI	Côte d'Ivoire	LK	Sri Lanka	SK	Slovakia
CM	Cameroon	LR	Liberia	SN	Senegal
CN	China	LT	Lithuania	SZ	Swaziland
CS	Czechoslovakia	LU	Luxembourg	TD	Chad
CZ	Czech Republic	LV	Latvia	TG	Togo
DE	Germany	MC	Monaco	TJ	Tajikistan
DK	Denmark	MD	Republic of Moldova	TT	Trinidad and Tobago
EE	Estonia	MG	Madagascar	UA	Ukraine
ES	Spain	ML	Mali	UG	Uganda
FI	Finland	MN	Mongolia	US	United States of America
FR	France	MR	Mauritania	UZ	Uzbekistan
GA	Gabon			VN	Viet Nam



# INTERNATIONAL SEARCH REPORT

Inter nal Application No  
PCT/US 96/05521

C.(Continuation) DOCUMENTS CONSIDERED TO BE RELEVANT		
Category	Citation of document, with indication, where appropriate, of the relevant passages	Relevant to claim No.
A	WO,A,91 16691 (JONHIG) 31 October 1991  see abstract; claims; figures see page 9, line 32 - page 15, line 27 ---	1-5,15, 18,28, 38,40, 42-45, 49-62,82
A	US,A,4 926 325 (W.M. BENTON) 15 May 1990 ---	
A	EP,A,0 484 603 (IBM) 13 May 1992 -----	

# INTERNATIONAL SEARCH REPORT

Information on patent family members

International Application No

PC1/US 96/05521

Patent document cited in search report	Publication date	Patent family member(s)	Publication date
WO-A-9310503	27-05-93	US-A- 5453601	26-09-95
		AU-A- 2013695	20-07-95
		AU-A- 2013795	20-07-95
		AU-A- 2013895	20-07-95
		AU-A- 2013995	20-07-95
		AU-B- 658233	06-04-95
		AU-A- 2739292	17-06-93
		CA-A- 2080452	16-05-93
		CN-A- 1073789	30-06-93
		DE-T- 542298	16-12-93
		EP-A- 0542298	19-05-93
		HU-A- 65212	02-05-94
		IL-A- 103397	18-06-96
		JP-A- 6162059	10-06-94
		JP-B- 7111723	29-11-95
		PL-A- 300041	05-04-94
		US-A- 5455407	03-10-95
		ZA-A- 9208773	13-05-93
WO-A-9308545	29-04-93	AU-B- 663739	19-10-95
		AU-A- 2888692	21-05-93
		BR-A- 9205416	17-05-94
		CA-A- 2098481	17-04-93
		EP-A- 0567610	03-11-93
		JP-T- 6503913	28-04-94
		PL-A- 299825	18-04-94
		US-A- 5440634	08-08-95
WO-A-9116691	31-10-91	AT-T- 127949	15-09-95
		AU-B- 653721	13-10-94
		AU-A- 7664491	11-11-91
		CA-A- 2058982	13-10-91
		CN-A,B 1057535	01-01-92
		DE-D- 69112975	19-10-95
		DE-T- 69112975	29-02-96
		EP-A- 0479982	15-04-92
		ES-T- 2034929	16-11-95
		PL-B- 169723	30-08-96
US-A-4926325	15-05-90	EP-A- 0438930	31-07-91

# INTERNATIONAL SEARCH REPORT

Information on patent family members

International Application No

PCT/US 96/05521

Patent document cited in search report	Publication date	Patent family member(s)	Publication date
EP-A-0484603	13-05-92	CA-A- 2054582	10-05-92
		DE-D- 69022424	19-10-95
		DE-T- 69022424	28-03-96
		JP-A- 4227154	17-08-92
		JP-B- 7123256	25-12-95
-----			

**THIS PAGE BLANK (USPTO)**